

NATIONAL AERONAUTICAL ESTABLISHMENT
LIBRARY

E. & M. No. 2584
(4191, 4511, 4807)
A.R.C. Technical Report



NATIONAL AERONAUTICAL
ESTABLISHMENT
27 OCT 1952
MR. CLAPHAM. BEDS.

MINISTRY OF SUPPLY

AERONAUTICAL RESEARCH COUNCIL
REPORTS AND MEMORANDA

Royal Aircraft Establishment
22 OCT 1952
LIBRARY

Tests in the Compressed Air Tunnel on the
Aerofoils NACA 0015 and NACA 0030 With
and Without Split Flap and on other Aerofoils
of Various Thicknesses With a Split Flap

By

R. JONES, M.A., D.Sc.

and the Staff of the Compressed Air Tunnel,
of the Aerodynamics Division, N.P.L.

Crown Copyright Reserved

LONDON: HER MAJESTY'S STATIONERY OFFICE

1952

PRICE 8s 6d NET

Tests in the Compressed Air Tunnel on the Aerofoils NACA 0015 and NACA 0030 With and Without Split Flap and on other Aerofoils of Various Thicknesses With a Split Flap


By

R. JONES, M.A., D.Sc.

and the Staff of the Compressed Air Tunnel,
of the Aerodynamics Division, N.P.L.

Reports and Memoranda No. 2584

June, 1940



Summary.—Reasons for Inquiry.—To obtain information on the effect of thickness on the aerodynamic characteristics of aerofoils with and without a split flap.

Range of Investigation.—The following 4 ft. by 8 in. rectangular aerofoils were tested :—

NACA 0015 and NACA 0030 with and without a split flap 0·1c wide at 90 deg. to wing surface and at 0·1c from trailing edge.

NACA 0012, NACA 23012, RAF 28 and RAF 48 with flap.

The effect of rounding the edge of the flap was considered on NACA 0015.

A comparison made with a 0·2c flap at 50 deg. to wing surface and at 0·2c from trailing edge on NACA 0015 and RAF 48.

The effect of rounding the ends of NACA 0030 was also examined. C_L , C_D and C_m were obtained over a range of Reynolds numbers with additional C_D measurements at closer intervals of R on the two wings without flap. $C_{D,0}$ was also determined by the momentum method on NACA 0030.

Results.—Fig. 1 shows that $C_{D,0}$ on the NACA 0030 without flaps is much less when the ends are rounded. In that case the drag is in closer agreement with that obtained by momentum methods. The curve of $C_{D,0}$ against thickness ratio, Fig. 2, shows that balance measurements on square-ended models can only be relied upon for thicknesses up to about 14 per cent. ; beyond that, the ends should be rounded to minimise end effect. $C_{D,0}$ increases with thickness ratio, particularly at the higher values of t/c considered.

$dC_L/d\alpha$ decreases with thickness ratio. It is also less for thick models with round ends than with square ends:

$dC_m/d\alpha$ increases with thickness ratio. It is also greater for thick models with round ends than with square ends.

In common with other thick wings, NACA 0030 shows $C_{L,max}$ falling as R increases. At $R = 7 \times 10^6$, $C_{L,max}$ is considerably less on NACA 0030 than on NACA 0015. $\Delta C_{L,max}$ due to flap is much greater on NACA 0030, resulting in only a comparatively small fall in $C_{L,max}$ on NACA 0030 with flap, compared with NACA 0015 with flap. Fig. 3 gives $C_{L,max}$ curves for a number of aerofoils and shows a slight increase in $\Delta C_{L,max}$ due to rounding the edge of the flap. (This also has the effect of displacing the lift curve in the direction of increasing α .) Agreement between 0·15c flap at 90 deg. and 0·20c flap at 50 deg. is good. (Projection of the latter perpendicular to the wing surface is approximately equal to the former.) Agreement is also good between Compressed Air Tunnel results on NACA 0012, 0015 and 23012 and D.V.L. (Germany) and Full Scale Tunnel (America) results.

Fig. 4 gives $C_{L,max}$ against thickness ratio at $R = 5 \times 10^6$. $C_{L,max}$ rises both on models with and without flap as thickness increases to 15 per cent. approximately and then falls slightly for models with flaps and sharply for models with no flaps. $\Delta C_{L,max}$ increases steadily with thickness ratio.

Note.—This report has been compiled from three unpublished reports, A.R.C. 4191, 4511 and 4607, and contains all the results incorporated in these reports except those relating to the Piercy wing 20 per cent. thick in A.R.C. 4511. Those results have been published in R & M 2459 together with corresponding results on a Piercy wing 12 per cent. thick.

1. *Introductory.*—The main object of the experiments, the results of which are presented in this report, was to obtain further information on the change in the aerodynamic characteristics of certain aerofoils of a conventional type as the thickness varied. Another object of the investigation was to obtain additional data on the effect of a split flap on the maximum lift coefficient of aerofoils of various thicknesses over a range of values of Reynolds number.

Tests with and without a flap were carried out on the two symmetrical aerofoils NACA 0015 and 0030 with t/c respectively 0.15 and 0.30. These aerofoils are members of the same family as the 12 per cent. thick NACA 0012 already tested in the Compressed Air Tunnel and reported on in R. & M. 1708¹.

The flap used in the tests was 0.15c wide and placed at 90 deg. to the lower surface of the wing and 0.15c from the trailing edge. It had a sharply bevelled edge and was of the same span as the aerofoil, viz., 4 ft.; it was the same flap as that used in previous experiments on the aerofoils RAF 69, 89, and 34, dealt with in R. & M. 1717² and R. & M. 1772³.

In addition, during the present series of tests, observations were taken on NACA 0015, with the edge of the flap rounded while retaining the overall width of 0.15c. Also the sharp-edged flap at 90 deg. was compared on NACA 0015 and RAF 48 with another sharp-edged flap 0.2c wide placed at 0.2c from the trailing edge at an angle of 50 deg. The latter has roughly the same projected area on a plane perpendicular to the wing surface as the 0.15c flap at 90 deg. The term flap, when used without qualification, will refer to the original 15 per cent. sharp-edged flap; when reference is made to the other two flaps, the rounding of the edge or the inclination to the wing will be specified.

Finally, the work was extended to include experiments with the flap fitted to other aerofoils tested earlier without a flap, viz., NACA 23012⁴, RAF 28⁵ and RAF 48⁵ and to a second model of NACA 0012.

2. The range of investigation may be summarised thus:—

NACA 0012	with 15 per cent. sharp-edged flap,
NACA 0015	without flap and with a flap of each of the three types.
NACA 0030	without flap, with square and rounded ends (<i>see</i> below section 4) and with 15 per cent. sharp-edged flap,
NACA 23012, RAF 28		with 15 per cent. sharp-edged flap,
and RAF 48		
RAF 48	with 20 per cent. sharp-edged flap at 50 deg.

The values of C_L , C_D and C_m were determined for several values of R from 0.3 to 7 millions, approximately, and over a range of incidence from below zero to above the stalling angle. The results are given in the tables, an index to which precedes Table 1.

In addition, the minimum drag coefficient of NACA 0015 and NACA 0030 were found by balance measurements and by the momentum method at closer intervals of R .

3. *Remarks on the Models.*—All the models had a chord of 8 in. and (except NACA 0030 with rounded ends) a span of 4 ft. The previously tested models (NACA 23012, RAF 28 and RAF 48) and the model of NACA 0015 made specially for these tests, were of aluminium alloy, hand-finished with a good smooth surface. The model of NACA 0030, also made for these tests, was of cast aluminium alloy; the surface was slightly pitted in places and did not polish up as well as the other aerofoils, but there was no reason for suspecting that the surface was not aerodynamically smooth even up to the highest Reynolds numbers of the tests.

With regard to the NACA 0012 section, the model used for the experiments of R. & M. 1870 was of chromium plated steel. It is regarded as a standard, of which special care is taken so that it can be used for overall calibration of tunnel and balance when occasion demands. It was considered undesirable to deface the model by drilling holes in it for attaching the flap. Therefore, use was made of another steel aerofoil of approximately the same section. This was the base for the copper covering used when examining the effect of rivets (R. & M. 1855)⁶. After removing

the copper sheet to prepare the basic wing for test, the latter was found to be so badly pitted as to be totally unsuitable for the experiments. Therefore, a thick layer of zinc was deposited on it by spraying and the model subsequently finished by hand. Measurements of the section at a few places showed that the dimensions were not exactly the same as those of the standard model; they were, however, regarded as being sufficiently close to justify the model being used, especially as a few tests on the model without flaps agreed with those on the standard model.

4. *Square and Rounded Ends.*—In previous experiments balance measurements of the profile drag coefficients, $C_{D,0}$, on thick aerofoils had yielded higher values than the momentum method. Accordingly NACA 0030 was tested with rounded tips added to the rectangular aerofoil. The tips were such that a spanwise section in a plane perpendicular to the chord at any point was a semi-circle of diameter equal to the wing thickness at that point. When, however, the tips were attached to the model it was no longer possible to mount the model on the balance by means of the spigots fitting into holes in the ends of the wing near the leading edge (pip support). The alternative V method was therefore used. With this method, the model is supported from the top of the balance with two V-shaped beams which are attached to the upper surface of the model in the tunnel*. The two methods were applied to the model with square ends as they afforded a check on the corrections normally applied to allow for drag and interference of supports. One set of results only is given for the tests on the square-ended model as the agreement between the two series was in general very good. The flap was fitted to the square-ended model only.

5. *Results.*—The results are given in detail in Tables 2–16; Table 1, which is preceded by an index to the tables, gives the dimensions of the sections of the aerofoils.

The values of $C_{D,0}$ have been calculated from the formula

$$C_{D,0} = C_D - 0.0555 C_L^2 \text{ for the square ended aerofoils and from}$$

$$C_{D,0} = C_D - 0.0525 C_L^2 \text{ for NACA 0030 with rounded ends.}$$

C_m is given with respect to an axis through the chord line $c/4$ from the leading edge.

The main features of the results have been plotted in the figures as follows:—

Fig. 1, $C_{D,0}$ against R for NACA 0012, 0015 and 0030.

Fig. 2, $C_{D,0}$ at $R = 7 \times 10^6$ against wing-thickness ratio.

Fig. 3, $C_{L \max}$ against R .

3(a) NACA 0012

3(b) NACA 0015

3(c) NACA 0030

3(d) NACA 23012 together with RAF 34 also 12 per cent. thick.

3(e) RAF 28 and 48.

3(f) RAF 69 and 89 two aerofoils 21 and 25 per cent. thick based on RAF 28.

These figures include sketches of the sections of the models. Figs. 3(a), 3(b) and 3(d) also contain curves obtained in the large wind tunnel of the D.V.L. (Germany) and in the Full Scale Tunnel (America)⁸.

Fig. 4, $C_{L \max}$ against thickness ratio at $R \times 5 \times 10^6$. Wing with and without flap.

6. *Remarks on the Results.*—(a) *Drag.* (i) *End Effect.*—Fig. 1 shows that the balance measurements of drag on NACA 0030 are appreciably greater on the square-ended model than on the model with rounded ends. The results on the latter are, however, in fairly close agreement with those obtained by the momentum method, in fact the momentum method yields slightly

* The model being upside down in the tunnel, this is the lower surface of the wing in flight.

higher values of $C_{D,0}$ at Reynolds numbers greater than 0.8×10^6 . On a thinner wing, Joukowski 12.7 per cent. thick⁹, balance measurements on a square-ended model agreed particularly well with momentum measurements. The agreement gradually deteriorates as thickness increases. At $t/c = 0.2$, $C_{D,0}$ may be 10 per cent. greater than the momentum drag, this figure increasing to 17 per cent. when $t/c = 0.3$. This is shown in Fig. 2, which applies to a Reynolds number of 7×10^5 .

It may probably be assumed that the momentum method gives a truer determination of the profile drag than balance measurements on square-ended wings.

The above considerations regarding agreement between momentum results and balance measurements on thicker models with rounded ends and on thinner models with square ends, lead to the conclusion that balance measurements yield reliable values of $C_{D,0}$ on rectangular wings up to, say, 15 per cent. thick, but that, owing to excessive end-effect, the ends should be rounded on thicker wings in order that balance measurements should be sufficiently accurate.

(ii) *Effect of Thickness.*—Fig. 2 also shows the manner in which the profile drag varies with thickness at $R = 7 \times 10^5$ in the C.A.T.; the curve has been drawn through the values obtained for rounded ends or by the momentum method. The rate of change in $C_{D,0}$ with thickness is fairly small for thin wings but increases appreciably as the thickness increases. For tabulated results see Tables, 6, 10 and 10a.

(b) *Lift and Moment.*—Curves giving C_L and C_m against incidence have not been included in the report. The main features of the results can be appreciated from Table 11 giving $dC_L/d\alpha$ and $dC_m/d\alpha$ and from Fig. 3, giving $C_{L \max}$ against R .

(i) *End Effect on C_L and C_m* does not appear to be as important as it is on drag. The value of $dC_L/d\alpha$ is, however, slightly less and the value of $dC_m/d\alpha$ greater on the round ended model. This was also observed in the experiments on the 20 per cent. thick Piercy wing¹⁰ and on the 23.6 per cent. thick Joukowski wing⁹. End effect on $C_{L \max}$ is small.

(ii) The effect of increasing thickness on the two quantities is small between $t/c = 0.12$ and 0.15, but a thickness increase from 15 to 30 per cent. results in a decrease in the value of $dC_L/d\alpha$ from 0.072 to 0.052 and at $R = 7 \times 10^5$ an increase in $dC_m/d\alpha$ from 0.0013 to 0.0055. This corresponds to a marked movement of the centre of pressure towards the leading edge as thickness increases. This also is in accordance with results previously obtained on the Piercy¹⁰ and Joukowski⁹ wings (*see* R. & M. No. 2459 for the former, and the table on p. 3 of R. & M. No. 1870 for the latter).

(iii) $C_{L \max}$.—Turning now to $C_{L \max}$, the results on NACA 0030 show the same characteristics as those served on other thick aerofoils, namely, a marked fall in $C_{L \max}$ as R increases. Reference to Fig. 3(f) shows that on RAF 69 and 89, respectively 21 and 25 per cent. thick, $C_{L \max}$ falls with increasing R up to $R = 3$ or 4×10^6 , but rises later. In the case of NACA 0030, the curve is falling over the entire range. With the flap, however, the variation of $C_{L \max}$ with R is small within the range covered by the C.A.T. At first, $C_{L \max}$ increases with R , then falls slightly giving a much greater $\Delta C_{L \max}$, due to flap, than on the thinner wings. Taking values at $R = 5 \times 10^6$, $C_{L \max}$ is plotted against thickness ratio for a number of wings in Fig. 4 and it is immediately evident that $\Delta C_{L \max}$, due to flap, increases steadily with thickness ratio over the range of thickness considered. Indeed, the effect of flap on NACA 0030 is such that, in spite of the low value of $C_{L \max}$ for the bare wing, the value for the wing with flap is but little less than the best observed, *viz.* on NACA 0015. The effect of increasing wing thickness can be summarised briefly thus :—

$C_{D,0}$ increases slowly at first and then rapidly.

$C_{L \max}$ increases slowly at first and then falls steadily.

$C_{L \max}$ with flap increases rapidly at first and then falls slowly.

It is interesting to note here the good agreement between the C.A.T. results at $R = 5 \times 10^6$ and those obtained in the F.S.T. (America) and at the D.V.L. (Germany) (NACA 0012, 0015 and 23012; Figs. 3(a), (b) and (d)).

It should also be mentioned that the effect of the 20 per cent. flap at 50 deg. is very nearly the same as that of the 15 per cent. flap at 90 deg. As stated above, the projected area of the former perpendicular to the wing surface is nearly equal to the latter.

Finally, the effect on $C_{L \max}$ of rounding-off the edge of the 15 per cent. flap is seen in Fig 3(b). There is a slight diminution in value at the higher Reynolds numbers and plotting C_L against α shows the lift curve to have been displaced in the direction of greater α when the flap was rounded.

REFERENCES

<i>No.</i>	<i>Author</i>	<i>Title, etc.</i>
1	R. Jones and D. H. Williams	The Effect of Surface Roughness on the Characteristics of the Aerofoils NACA 0012 and RAF 34. R. & M. No. 1708. February, 1936.
2	D. H. Williams, A. F. Brown and E. Smyth.	Tests of Aerofoils RAF 69 and RAF 89 with and without Split Flaps in the C.A.T. R. & M. No. 1717. May, 1936.
3	D. H. Williams and A. F. Brown	Tests of RAF 34 and Negative Incidences and the Effect of Surface Roughness on RAF 34 with Split Flaps in the C.A.T. R. & M. No. 1772. 1937.
4	D. H. Williams, A. H. Bell and E. Smyth.	Tests of Aerofoil NACA 23012 in the C.A.T. R. & M. No. 1898. January, 1937.
5	E. F. Relf, R. Jones and A. H. Bell	Tests of Six Aerofoil Sections at Various Reynolds numbers in the C.A.T. R. & M. No. 1706. 1936.
6	D. H. Williams and A. F. Brown	Experiments on a Riveted Wing in the C.A.T. R. & M. No. 1855. August, 1938.
7	Doetsch and Kramer	Systematic Profile Investigations in the Large Wind Tunnel of the D.V.L. <i>Luftfahrtforschung</i> , Vol. 14, No. 10, pp. 480 to 485. 20th October, 1937. A.R.C. 3354. (Unpublished.)
8	H. J. Goett and W. K. Bullivant	Tests of NACA 0009, 0012 and 0018 Airfoils in the F.S.T. Summary of NACA Report No. 647. A.R.C. 4053. (Unpublished.)
9	D. H. Williams, A. H. Bell and A. F. Brown.	Tests on Two Joukowski Sections in the C.A.T. R. & M. No. 1870. May, 1939.
10	D. H. Williams, A. H. Bell and W. G. Raymer.	Experiments on Two Piercy Aerofoils in the C.A.T. R. & M. 2459. August, 1939.

LIST OF TABLES

1. Dimensions of Aerofoils.
2. NACA 0015. C_L , C_D and C_m on model without flap.
3. NACA 0015. C_L , C_D and C_m with 15 per cent. flap at 90 deg.
4. NACA 0015. C_L , C_D and C_m with 15 per cent. flap at 90 deg., edge of flap rounded.
5. NACA 0015. C_L , C_D and C_m with 20 per cent. flap at 50 deg.
6. NACA 0015. $C_{D,0 \text{ min.}}$.
7. NACA 0030. C_L , C_D and C_m on model without flap. Square ends on pips.
8. NACA 0030. C_L , C_D and C_m rounded ends on V's.
9. NACA 0030. C_L , C_D and C_m with 15 per cent. flap at 90 deg. Square ends on pips.
10. NACA 0030. $C_{D,0 \text{ min.}}$ measured on the balance.
- 10a. NACA 0030. $C_{D,0 \text{ min.}}$ measured by momentum methods.
11. NACA 0012, 0015 and 0030. $dC_L/d\alpha$ and $dC_m/d\alpha$.
12. NACA 0012. C_L , C_D and C_m on model with 15 per cent. flap at 90 deg.
13. NACA 23012. C_L , C_D and C_m on model with 15 per cent. flap at 90 deg.
14. RAF 28. C_L , C_D and C_m on model with 15 per cent. flap at 90 deg.
15. RAF 48. C_L , C_D and C_m on model with 15 per cent. flap at 90 deg.
16. RAF 48. C_L , C_D and C_m on model with 20 per cent. flap at 50 deg.

The flap in all cases except in Table 3 had a sharp edge.

The 0.15c flap was 0.15 chord from the trailing edge.

The 0.20c flap was 0.2 chord from the trailing edge.

For results on the last four models without flaps see R. & M. No. 1708 (NACA 0012), R. & M. No. 1898 (NACA 23012) and R. & M. No. 1706 (RAF 28 and 48).

TABLE 1
Dimensions of Aerofoils in Terms of Chord

Distance from Leading Edge	NACA 0012	NACA 0015	NACA 0030	NACA 23012		RAF 28		RAF 48	
	$y_1 = y_2$	$y_1 = y_2$	$y_1 = y_2$	y_1	y_2	y_1	y_2	y_1	y_2
0	0	0	0	0	0	0	0	0	0
0.0125	0.0189	0.0238	0.0475	0.0267	0.0123	0.0137	0.0126	0.0260	0.0165
0.025	0.0261	0.0327	0.0654	0.0361	0.0171	0.0217	0.0168	0.0365	0.0234
0.05	0.0356	0.0444	0.0888	0.0491	0.0226	0.0314	0.0223	0.0520	0.0316
0.075	0.0420	0.0525	0.1050	0.0580	0.0261	0.0385	0.0255	0.0639	0.0369
0.10	0.0468	0.0586	0.1172	0.0643	0.0292	0.0444	0.0276	0.0730	0.0403
0.15	0.0534	0.0669	0.1337	0.0719	0.0350	0.0538	0.0304	0.0863	0.0441
0.20	0.0574	0.0717	0.1435	0.0750	0.0397	0.0600	0.0313	0.0953	0.0458
0.30	0.0600	0.0750	0.1500	0.0755	0.0446	0.0664	0.0311	0.1040	0.0456
0.40	0.0580	0.0725	0.1450	0.0714	0.0448	0.0670	0.0286	0.1020	0.0433
0.50	0.0530	0.0663	0.1325	0.0641	0.0417	0.0627	0.0251	0.0938	0.0390
0.60	0.0456	0.0570	0.1141	0.0547	0.0367	0.0540	0.0207	0.0794	0.0336
0.70	0.0367	0.0458	0.0916	0.0436	0.0300	0.0428	0.0160	0.0605	0.0265
0.80	0.0262	0.0328	0.0656	0.0308	0.0216	0.0302	0.0111	0.0402	0.0183
0.90	0.0145	0.0181	0.0362	0.0168	0.0123	0.0163	0.0064	0.0195	0.0100
0.95	0.0081	0.0102	0.0204	0.0092	0.0070	0.0091	0.0042	0.0105	0.0060
1.00	0	0	0	0	0	0	0	0	0

y_1 = ordinate of upper surface with respect to nose-tail datum line.

y_2 = ordinate of lower surface with respect to nose-tail datum line.

TABLE 2
NACA 0015 without flap

$R = 0.30 \times 10^6$, $P = 1$ atmos.,
 $\frac{1}{2}\rho V^2 = 6.62$, $V = 76.3$ ft./sec.

$R = 0.67 \times 10^6$, $P = 2.28$ atmos.,
 $\frac{1}{2}\rho V^2 = 13.5$, $V = 71.4$ ft./sec.

α deg.	C_L	C_D	$C_{D,0}$	C_m	α deg.	C_L	C_D	$C_{D,0}$	C_m
- 2.9	-0.216	0.0137	0.0111	-0.0081	- 2.9	-0.219	0.0116	0.0090	-0.0059
- 0.8	-0.068	0.0113	0.0110	-0.0021	- 0.8	-0.070	0.0089	0.0086	-0.0015
+ 0.2 ₅	+0.005	0.0107	0.0107	+0.0006	+ 0.2 ₅	+0.003	0.0085	0.0085	+0.0006
1.2 ₅	0.076	0.0108	0.0105	0.0033	1.3	0.075	0.0087	0.0084	0.0028
3.3 ₅	0.222	0.0134	0.0107	0.0092	3.3 ₅	0.220	0.0114	0.0087	0.0073
6.4	0.451	0.0236	0.0123	0.0127	6.4 ₅	0.437	0.0210	0.0104	0.0134
9.5 ₅	0.710	0.0438	0.0158	0.0024	9.5 ₅	0.658	0.0378	0.0138	0.0149
11.5 ₅	0.817	0.0570	0.0200	0.0118	12.5 ₅	0.857	0.0587	0.0189	0.0201
13.6 ₅	0.905	0.0704	0.0251	0.0244	14.7	0.982	0.0749	0.0214	0.0251
14.6 ₅	0.956	0.0780	0.0273	0.0287	15.7 ₅	0.994	0.0851	0.0303	0.0265
15.7	0.948	0.090		+0.0281	16.7 ₅	1.010	0.104		0.0147
16.9 ₅	0.580	0.210		-0.0518	17.8 ₅	1.016	0.120		+0.0095
18.1	0.543	0.229		-0.0547	18.9 ₅	0.993	0.140		-0.0013
19.1 ₅	0.540	0.244		-0.0575	21.3	0.542	0.271		-0.0625
21.3	0.539	0.273		-0.0623	24.4 ₅	0.557	0.318		-0.0682
23.4	0.553	0.306		-0.0659	15.8*	0.784	0.156		-0.0256
24.5	0.554	0.326		-0.0681	16.9 ₅ *	0.645	0.197		-0.0426
25.5 ₅	0.565	0.340		-0.0710	18.1*	0.597	0.220		-0.0502
14.7 ₅ *	0.827	0.165		-0.0484	19.1 ₅ *	0.569	0.240		-0.0544
15.8 ₅ *	0.656	0.192		-0.0481					

C_m is given throughout with reference to the quarter-chord axis.
 $\frac{1}{2}\rho V^2$ is given throughout in lb./sq. ft.

$R = 1.27 \times 10^6$, $P = 4.47$ atmos.,
 $\frac{1}{2}\rho V^2 = 25.4$, $V = 70.3$ ft./sec.

$R = 2.19 \times 10^6$, $P = 7.9$ atmos.,
 $\frac{1}{2}\rho V^2 = 42.3$, $V = 68.0$ ft./sec.

α deg.	C_L	C_D	$C_{D,0}$	C_m	α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.8	-0.073	0.0081	0.0078	-0.0014	- 0.8	-0.079	0.0081	0.0078	-0.0010
+ 0.2 ₅	+0.002	0.0079	0.0079	+0.0005	+ 0.2 ₅	-0.002	0.0078	0.0078	+0.0006
1.3	0.066	0.0081	0.0079	0.0023	1.3	+0.074	0.0081	0.0078	0.0025
3.4	0.230	0.0110	0.0081	0.0061	3.4	0.226	0.0109	0.0081	0.0060
6.4 ₅	0.449	0.0205	0.0093	0.0109	6.5	0.450	0.0204	0.0092	0.0107
9.6	0.665	0.0363	0.0118	0.0158	9.7	0.679	0.0365	0.0109	0.0141
12.6 ₅	0.875	0.0574	0.0149	0.0199	12.7 ₅	0.900	0.0588	0.0139	0.0166
14.7	1.005	0.0746	0.0186	0.0227	14.8 ₅	1.039	0.0765	0.0166	0.0182
15.8	1.062	0.0837	0.0212	0.0238	15.8 ₅	1.106	0.0865	0.0187	0.0187
16.8	1.113	0.0946	0.0280	0.0247	16.8 ₅	1.176	0.0965		0.0194
17.8 ₅	1.079	0.124		+0.0045	17.9 ₅	1.231	0.108		0.0199
18.9 ₅	1.072	0.140		-0.0004	19.0	1.282	0.119		+0.0200
21.1	1.007	0.187		-0.0231	20.1	1.136	0.165		-0.0108
24.4	0.807	0.310		-0.0565	22.2	1.008	0.215		-0.0360
19.0 ₅ *	0.879	0.165		+0.0034					
21.2*	0.799	0.256		-0.0486					

* Decreasing incidence.

TABLE 2 (contd.)
 NACA 0015 without flap

$R = 4.26 \times 10^6$, $P = 12.4$ atmos.,
 $\frac{1}{2}\rho V^2 = 107.0$ $V = 86.9$ ft./sec.

$R = 5.54 \times 10^6$, $P = 17.8$ atmos.,
 $\frac{1}{2}\rho V^2 = 130.0$, $V = 80.7$ ft./sec.

α deg.	C _L	C _D	C _{D,0}	C _m		α deg.	C _L	C _D	C _{D,0}	C _m
- 0.8 ₅	-0.077	0.0083	0.0080	-0.0014		- 0.8 ₅	-0.078	0.0085	0.0082	-0.0013
+ 0.2 ₅	+0.005	0.0079	0.0079	+0.0002		+ 0.2 ₅	+0.005	0.0081	0.0081	+0.0003
1.3 ₅	0.083	0.0083	0.0079	0.0017		1.3 ₅	0.087	0.0083	0.0079	0.0019
3.5	0.244	0.0111	0.0078	0.0051		3.5 ₅	0.252	0.0114	0.0079	0.0049
6.7 ₅	0.480	0.0213	0.0085	0.0095		6.7 ₅	0.490	0.0217	0.0085	0.0091
9.9 ₅	0.718	0.0377	0.0091	0.0125		10.0 ₅	0.738	0.0383	0.0081	0.0120
13.1	0.947	0.0616	0.0129	0.0143		13.2 ₅	0.961	0.0622	0.0110	0.0134
15.2 ₅	1.091	0.0808	0.0148	0.0148		16.4 ₅	1.182	0.0914	0.0139	0.0139
17.3	1.235	0.102	0.0174	0.0152		18.6	1.324	0.115	0.0181	0.0140
18.4 ₅	1.295	0.113	0.0200	0.0154		19.7	1.369	0.126	0.0207	0.0144
19.5	1.360	0.125		0.0156		20.7 ₅	1.432	0.136		+0.0143
20.5 ₅	1.412	0.138		+0.0152		21.7 ₅	1.216	0.189		-0.0274
21.5 ₅	1.187	0.195		-0.0220		22.7	1.182	0.236		-0.0467
22.5 ₅	1.056	0.230		-0.0438		24.7 ₅	1.000	0.290		-0.0676
24.7	0.992	0.276		-0.0509						

$R = 7.40 \times 10^6$, $P = 24.4$ atmos.,
 $\frac{1}{2}\rho V^2 = 171.5$, $V = 79.4$ ft./sec.

α deg.	C _L	C _D	C _{D,0}	C _m
- 0.9	-0.083	0.0089	0.0085	-0.0011
+ 0.2 ₅	+0.001	0.0083	0.0083	+0.0004
1.4	0.085	0.0087	0.0083	0.0018
3.6	0.251	0.0116	0.0081	0.0050
6.9	0.498	0.0220	0.0083	0.0090
10.2 ₅	0.745	0.0395	0.0087	0.0110
13.5	0.982	0.0639	0.0104	0.0118
16.7 ₅	1.196	0.0965	0.0172	0.0124
18.9 ₅	1.321	0.119	0.0225	0.0126
20.0	1.386	0.131	0.0251	0.0125
21.1 ₅	1.436	0.143		+0.0127
22.0	1.260	0.206		-0.0239
23.0	1.234	0.236		-0.0374
24.9	1.015	0.304		-0.0697

TABLE 3

NACA 0015 with 15 per cent. sharp edge flap at 90 deg. Aspect ratio 6

$R = 0.31 \times 10^6$ $P = 1$ atmos.,
 $\frac{1}{2}\rho V^2 = 6.62$, $V = 75.5$ ft./sec.

$R = 0.66 \times 10^6$, $P = 2.25$ atmos.,
 $\frac{1}{2}\rho V^2 = 13.5$, $V = 71.9$ ft./sec.

α deg.	C_L	C_D	C_m
-10.9 ₅	0.080	0.150	-0.170
- 8.8 ₅	0.265	0.159	-0.184
- 5.6 ₅	0.533	0.176	-0.190
- 2.5 ₅	0.770	0.196	-0.199
+ 1.6	1.069	0.230	-0.204
5.7	1.337	0.269	-0.199
8.9	1.542	0.304	-0.197
10.9 ₅	1.655	0.328	-0.197
12.0	1.711	0.341	-0.197
13.0	1.778	0.354	-0.198
14.5 ₅	1.037	0.503	-0.259
16.6 ₅	1.024	0.549	-0.247
11.1*	1.340	0.422	-0.259
12.3*	1.165	0.463	-0.268
13.4*	1.092	0.485	-0.266

α deg.	C_L	C_D	C_m
-11.0	0.064	0.146	-0.156
- 8.9 ₅	0.247	0.155	-0.169
- 5.6 ₅	0.517	0.173	-0.185
- 2.5 ₅	0.757	0.192	-0.190
+ 1.6 ₅	1.056	0.227	-0.193
5.7 ₅	1.331	0.264	-0.191
8.9	1.527	0.299	-0.189
10.9 ₅	1.647	0.323	-0.187
12.0 ₅	1.712	0.337	-0.187
13.0 ₅	1.769	—	—
14.1	1.827	0.365	-0.187
15.1 ₅	1.887	—	—
16.1 ₅	1.935	0.391	-0.188
17.7	1.042	0.578	-0.254
18.8	1.032	0.606	-0.258
19.8	1.073	0.635	-0.263
12.3*	1.282	0.438	-0.243
13.4*	1.125	—	—
14.5 ₅ *	1.067	0.497	-0.248
15.6*	1.045	—	—
16.6*	1.036	0.553	-0.253

$R = 1.26 \times 10^6$, $P = 4.40$ atmos.,
 $\frac{1}{2}\rho V^2 = 25.4$, $V = 71.0$ ft./sec.

$R = 2.14 \times 10^6$, $P = 7.7$ atmos.,
 $\frac{1}{2}\rho V^2 = 42.3$, $V = 69.0$ ft./sec.

α deg.	C_L	C_D	C_m
-11.0	0.049	0.145	-0.152
- 8.9 ₅	0.239	0.157	-0.166
- 5.6 ₅	0.513	0.172	-0.180
- 2.5 ₅	0.760	0.192	-0.187
+ 1.6 ₅	1.065	0.224	-0.191
5.8	1.348	0.264	-0.190
9.0	1.546	0.295	-0.188
11.0	1.671	0.323	-0.186
13.1	1.786	0.350	-0.184
14.2	1.860	—	—
15.2	1.926	0.382	-0.184
16.2	1.981	—	—
17.2	2.045	0.406	-0.184
18.3	2.097	—	—
19.3	2.165	0.425	-0.183
20.3	2.203	—	—
21.9 ₅	1.105	0.692	-0.268
24.2	1.051	0.737	-0.262
16.4 ₅ *	1.428	—	—
17.5 ₅ *	1.337	0.566	-0.261
18.7 ₅ *	1.206	—	—
19.7 ₅ *	1.153	0.630	-0.263
20.8 ₅ *	1.143	—	—

α deg.	C_L	C_D	C_m
-11.0 ₅	0.053	0.144	-0.155
- 8.9	0.239	0.154	-0.167
- 5.7	0.504	0.171	-0.180
- 2.5 ₅	0.755	0.193	-0.187
+ 1.7	1.063	0.230	-0.191
5.8 ₅	1.351	0.269	-0.189
9.0 ₅	1.546	0.304	-0.187
11.1	1.677	0.328	-0.185
13.2 ₅	1.806	0.355	-0.183
15.3	1.932	0.385	-0.183
17.3 ₅	2.051	0.415	-0.182
18.4	2.117	0.431	-0.183
19.4 ₅	2.177	0.447	-0.183
20.5	2.248	0.464	-0.184
21.5 ₅	2.292	0.480	-0.183
22.6 ₅	2.337	0.496	-0.184
24.1	1.248	0.688	-0.259
25.2	1.212	0.718	-0.259
18.6 ₅ *	1.593	0.473	-0.204
19.7 ₅ *	1.412	—	—
20.8*	1.329	0.511	-0.216
21.9 ₅ *	1.265	—	—
23.1*	1.216	0.556	-0.223 ₅

* Decreasing incidence.

TABLE 3 (contd.)

$R = 4.17 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 107.0,$

$P = 12.3 \text{ atmos.},$
 $V = 87.8 \text{ ft./sec.}$

$R = 5.39 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 130.0,$

$P = 17.6 \text{ atmos.},$
 $V = 81.9 \text{ ft./sec.}$

α deg.	C _L	C _D	C _m	α deg.	C _L	C _D	C _m
-11.2 ₅	0.044	0.144	-0.158	-11.3 ₅	0.043	0.145	-0.160
- 9.0 ₅	0.223	0.151	-0.166	- 9.1	0.221	0.154	-0.169
- 5.7 ₅	0.494	0.170	-0.178	- 5.7 ₅	0.490	0.171	-0.178
- 1.4 ₅	0.825	0.198	-0.185	- 1.4 ₅	0.823	0.198	-0.183
+ 2.9 ₅	1.141	0.237	-0.187	+ 3.0 ₅	1.127	0.236	-0.185
7.2	1.428	0.278	-0.185	7.3 ₅	1.420	0.279	-0.186
11.5	1.688	0.328	-0.184	11.6 ₅	1.698	0.325	-0.182
15.8	1.953	0.389	-0.184	16.0	1.946	0.387	-0.182
18.9 ₅	2.143	0.436	-0.183	19.1 ₅	2.140	0.436	-0.184
21.0 ₅	2.267	0.471	-0.184	21.3	2.272	0.467	-0.187
22.2	2.325	0.485	-0.184	22.4	2.323	0.487	-0.187
23.2 ₅	2.380	0.505	-0.183	23.5	2.374	0.507	-0.183
24.2 ₅	1.198	0.616	-0.239	24.2 ₅	1.198	0.631	-0.243
25.2 ₅	1.170	0.665	-0.251	25.2 ₅	1.202	0.685	-0.261
18.9*	1.609	0.503	-0.213	20.0 ₅ *	1.619	0.511	-0.214
21.0*	1.430	0.536	-0.232	21.0 ₅ *	1.428	0.540	-0.223
22.0 ₅ *	1.342	0.555	-0.233	22.1 ₅ *	1.348	0.565	-0.231
23.1 ₅ *	1.252	0.574	-0.233	23.2*	1.260	0.588	-0.235

TABLE 4

NACA 0015 with 15 per cent. rounded edge flap at 90 deg. Aspect ratio 6

$R = 0.68 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 13.5,$

$P = 2.35 \text{ atmos.},$
 $V = 70.3 \text{ ft./sec.}$

$R = 1.28 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 25.4,$

$P = 4.40 \text{ atmos.},$
 $V = 70.3 \text{ ft./sec.}$

α deg.	C _L	C _D	C _m	α deg.	C _L	C _D	C _m
-10.9 ₅	0.036	0.138	-0.148	-10.9 ₅	0.016	0.136	-0.145
- 8.8 ₅	0.221	0.146	-0.162	- 8.8 ₅	0.203	0.145	-0.157
- 5.6 ₅	0.483	0.163	-0.175	- 5.6	0.474	0.162	-0.171
- 2.5 ₅	0.727	0.183	-0.181	- 2.5 ₅	0.725	0.183	-0.179
+ 1.6 ₅	1.028	0.217	-0.185	+ 1.6 ₅	1.028	0.214	-0.179
5.8	1.308	0.255	-0.181	5.8	1.311	0.257	-0.181
8.9 ₅	1.494	0.289	-0.180	9.0 ₅	1.517	0.290	-0.178
12.0 ₅	1.668	0.329	-0.180	11.0 ₅	1.651	0.314	-0.176
14.1 ₅	1.807	0.352	-0.178	14.2	1.834	0.355	-0.175
15.1 ₅	1.862	0.367	-0.177	16.2 ₅	1.961	0.381	-0.171
16.1 ₅	1.928	0.382	-0.177	18.3	2.006	0.413	-0.175
17.7	1.028	0.566	-0.239	19.3 ₅	2.149	0.426	-0.177
19.8 ₅	1.044	0.623	-0.251	20.3 ₅	2.203	0.442	-0.178
20.0	1.056	0.683	-0.261	21.9	1.152	0.679	-0.260
12.3*	1.292	0.419	-0.231	23.1	1.072	0.679	-0.249
14.5 ₅ *	1.059	0.483	-0.241	16.4*	1.532	0.483	-0.222
15.6*	1.034	0.507	-0.238	18.6 ₅ *	1.366	0.556	-0.235
16.6 ₅ *	1.027	0.532	-0.242	19.7*	1.330	0.575	-0.232
				20.8 ₅ *	1.206	0.643	-0.255

* Decreasing incidence.

TABLE 4 (contd.)

$R = 2.13 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 42.3,$

$P = 7.7$ atmos.,
 $V = 69.3$ ft./sec.

$R = 4.36 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 107.0,$

$P = 12.7$ atmos.,
 $V = 85.8$ ft./sec.

α deg.	C _L	C _D	C _m	α deg.	C _L	C _D	C _m
-11.0 ₅	0.009	0.133	-0.146	-11.2	-0.004	0.131	-0.146
- 8.9	0.195	0.143	-0.157	- 9.0	+0.171	0.139	-0.155
- 5.6 ₅	0.460	0.161	-0.169	- 5.7	0.438	0.155	-0.164
- 1.5	0.789	0.192	-0.179	- 1.4	0.777	0.184	-0.170
+ 2.7 ₅	1.087	0.227	-0.178	+ 3.0	1.088	0.220	-0.172
7.0	1.368	0.269	-0.177	7.2	1.379	0.262	-0.173
11.1 ₅	1.636	0.318	-0.175	11.5 ₅	1.645	0.312	-0.170
15.3	1.895	0.372	-0.173	15.8	1.896	0.367	-0.170
18.4 ₅	2.074	0.417	-0.172	19.0 ₅	2.090	0.417	-0.170
20.5	2.197	0.450	-0.172	20.0 ₅	2.152	0.433	-0.171
21.6	2.243	0.488	-0.173	21.1	2.218	0.452	-0.172
22.6 ₅	2.293	0.484	-0.172	22.1 ₅	2.273	0.569	-0.174
24.1 ₅	1.177	0.576	-0.222	23.1 ₅	1.228	0.580	-0.227
25.2	1.172	0.612	-0.222	25.2	1.226	0.691	-0.255
18.6 ₅ *	1.581	0.451	-0.195	18.9 ₅ *	1.631	0.471	-0.200
20.8 ₅ *	1.336	0.504	-0.210	19.9 ₅ *	1.598	0.511	-0.218
21.9 ₅ *	1.266	0.524	-0.215	21.0*	1.414	0.535	-0.225
23.1*	1.217	0.550	-0.218	22.1*	1.252	0.551	-0.222

$R = 5.71 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 130.0,$

$P = 18.4$ atmos.,
 $V = 79.1$ ft./sec.

α deg.	C _L	C _D	C _m
-11.3	-0.020	0.129	-0.144
- 9.0 ₅	+0.156	0.135	-0.151
- 5.7	0.423	0.151	-0.159
- 1.3 ₅	0.765	0.180	-0.167
+ 3.0	1.082	0.216	-0.169
7.3 ₅	1.376	0.258	-0.170
11.7	1.652	0.308	-0.167
16.0	1.918	0.366	-0.169
19.2 ₅	2.103	0.416	-0.170
21.3	2.232	0.449	-0.172
22.4	2.278	0.469	-0.173
23.2	1.236	0.588	-0.224
25.2 ₅	1.179	0.680	-0.251
20.1*	1.647	0.470	-0.199
21.1 ₅ *	1.465	0.511	-0.199
22.1 ₅ *	1.333	0.551	-0.223

* Decreasing incidence.

TABLE 5

NACA 0015 with 20 per cent. flap at 50 deg fixed at 0.2c from the trailing edge. Aspect ratio 6

$R = 0.30 \times 10^6, \quad P = 1 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 6.63, \quad V = 76.5 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 2.5	0.742	0.160	-0.223
+ 0.5	0.973	0.184	-0.221
3.6	1.200	0.213	-0.221
6.6 ₅	1.421	0.248	-0.220
9.7	1.627	0.282	-0.219
11.7	1.744	0.305	-0.216
12.6 ₅	1.807	0.316	-0.215
14.1 ₅	1.091	0.465	-0.275
15.3	1.059	0.484	-0.282
16.4	1.038	0.506	-0.271
12.0*	1.257	0.417	-0.277
13.0*	1.154	0.444	-0.279

$R = 0.65 \times 10^6, \quad P = 2.40 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 13.3, \quad V = 70.7 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 2.5	0.738	0.156	-0.218
+ 0.5	0.968	0.178	-0.219
3.6 ₅	1.192	0.208	-0.219
6.7	1.413	0.243	-0.219
9.7	1.629	0.279	-0.220
12.6 ₅	1.820	0.316	-0.218
13.7 ₅	1.877	0.329	-0.217
14.8	1.936	0.342	-0.214
15.8 ₅	1.965	0.355	-0.212
17.4 ₅	1.141	0.524	-0.277
18.5 ₅	1.137	0.548	-0.277
13.0*	1.192	0.436	-0.273
15.2*	1.182	0.483	-0.278
16.4*	1.044	0.509	-0.277

$R = 1.22 \times 10^6, \quad P = 4.60 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 24.9, \quad V = 70.3 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 2.5	0.727	0.155	-0.218
+ 0.5 ₅	0.955	0.177	-0.218
3.6 ₅	1.189	0.210	-0.221
6.7 ₅	1.404	0.243	-0.221
9.7 ₅	1.627	0.280	-0.221
12.7 ₅	1.808	0.318	-0.218
14.9	1.946	0.345	-0.217
17.0	2.057	0.372	-0.214
18.1	2.108	0.387	-0.213
19.1 ₅	2.144	0.401	-0.212
20.5 ₅	1.442	0.562	-0.261
21.7 ₅	1.411	0.591	-0.259
17.3*	1.512	0.486	-0.259
18.5 ₅ *	1.137	0.532	-0.252
19.6 ₅ *	1.121	0.543	-0.255

$R = 2.11 \times 10^6, \quad P = 8.0 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 41.6, \quad V = 67.9 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 2.5	0.723	0.154	-0.216
+ 0.5 ₅	0.959	0.178	-0.217
3.7	1.183	0.208	-0.218
6.8	1.407	0.241	-0.218
9.8 ₅	1.618	0.281	-0.219
12.8 ₅	1.812	0.320	-0.218
15.0	1.947	0.351	-0.216
17.1	2.065	0.378	-0.214
19.3	2.180	0.408	-0.213
20.3 ₅	2.250	0.424	-0.212
21.4 ₅	2.298	0.440	-0.210
22.4 ₅	2.336	0.450	-0.207
23.9 ₅	1.231	0.547	-0.252
25.0 ₅	1.193	0.571	-0.257
19.5 ₅ *	1.485	0.449	-0.235
20.6 ₅ *	1.384	0.472	-0.239
21.8*	1.319	0.497	-0.242
22.9*	1.276	0.522	-0.248

* Decreasing incidence.

TABLE 5 (contd.)

$R = 4.31 \times 10^6$, $P = 13.4$ atmos.,
 $\frac{1}{2}\rho V^2 = 104.2$, $V = 83.1$ ft./sec.

$R = 6.23 \times 10^6$, $P = 23.9$ atmos.,
 $\frac{1}{2}\rho V^2 = 122.4$, $V = 67.6$ ft./sec.

α deg.	C_L	C_D	C_m
- 2.5	0.718	0.156	-0.215
+ 0.6	0.965	0.181	-0.219
3.9	1.201	0.209	-0.219
7.05	1.422	0.245	-0.219
10.2	1.633	0.283	-0.218
13.2 ₅	1.843	0.322	-0.218
15.4 ₅	1.979	0.351	-0.216
17.6 ₅	2.103	0.381	-0.215
19.8	2.225	0.414	-0.217
20.9	2.285	0.432	-0.217
22.0	2.347	0.446	-0.216
23.0 ₅	2.388	0.465	-0.214
24.0	1.226	0.573	-0.258
25.1	1.191	0.596	-0.267
20.8 ₅ *	1.516	0.493	-0.252
21.9*	1.394	0.525	-0.257
22.9 ₅ *	1.323	0.550	-0.261

α deg.	C_L	C_D	C_m
- 2.5	0.719	0.153	-0.214
+ 0.6	0.941	0.178	-0.218
3.9	1.210	0.210	-0.218
7.05	1.432	0.244	-0.217
10.2 ₅	1.644	0.279	-0.216
13.3	1.852	0.322	-0.217
15.5	1.990	0.353	-0.217
17.7 ₅	2.097	0.382	-0.215
19.9 ₅	2.222	0.418	-0.215
21.0 ₅	2.293	0.432	-0.217
22.1 ₅	2.357	0.449	-0.215
22.9 ₅	1.336	0.573	-0.275
24.0 ₅	1.251	0.598	-0.271
20.8 ₅ *	1.638	0.509	-0.259
21.9 ₅ *	1.458	0.543	-0.267

* Decreasing incidence.

TABLE 6
 NACA 0015 without flap. Minimum drag

P atmos.	$R \times 10^{-6}$	C_L	C_D	$C_{D,0}$	P atmos.	$R \times 10^{-6}$	C_L	C_D	$C_{D,0}$
2.26	0.36	-0.067	0.0106	0.0103	7.68	1.25	-0.074	0.0083	0.0080
		+0.004	0.0100	0.0100			+0.002	0.0079	0.0079
		0.072	0.0103	0.0100			0.076	0.0083	0.0080
2.26	0.51	-0.070	0.0097	0.0094	7.68	1.60	-0.079	0.0083	0.0080
		+0.003	0.0094	0.0094			-0.001	0.0078	0.0078
		0.073	0.0097	0.0094			+0.074	0.0083	0.0080
2.26	0.80	-0.072	0.0085	0.0082	7.97	2.74	-0.082	0.0083	0.0079
		+0.004	0.0083	0.0083			+0.002	0.0078	0.0078
		0.067	0.0085	0.0083			0.081	0.0082	0.0079
4.48	0.72	-0.072	0.0089	0.0086	12.2 ₅	1.98	-0.079	0.0084	0.0081
		-0.002	0.0083	0.0083			-0.000	0.0079	0.0079
		0.074	0.0088	0.0085			+0.072	0.0083	0.0080
4.47	0.94	-0.074	0.0083	0.0080	12.3 ₅	2.59	-0.076	0.0081	0.0078
		+0.001	0.0080	0.0080			+0.003	0.0079	0.0079
		0.076	0.0084	0.0081			0.077	0.0082	0.0079
4.46	1.52	-0.079	0.0084	0.0080	12.4	3.45	-0.075	0.0083	0.0080
		+0.001	0.0080	0.0080			+0.003	0.0079	0.0079
		+0.074	0.0083	0.0080			0.082	0.0083	0.0079

TABLE 6 (contd.)

P atmos.	$R \times 10^{-6}$	C_L	C_D	$C_{D,0}$
17.3	3.51	-0.079	0.0085	0.0082
		+0.001	0.0080	0.0080
		0.079	0.0084	0.0081
17.5	4.76	-0.079	0.0088	0.0085
		+0.003	0.0081	0.0081
		0.084	0.0084	0.0080
17.7	5.90	-0.084	0.0088	0.0084
		+0.003	0.0082	0.0082
		0.086	0.0085	0.0081
23.3	4.67	-0.080	0.0086	0.0083
		+0.001	0.0082	0.0082
		0.080	0.0084	0.0081
23.7	6.86	-0.083	0.0089	0.0085
		+0.002	0.0085	0.0085
		0.085	0.0089	0.0085
24.2	7.95	-0.082	0.0091	0.0087
		+0.002	0.0085	0.0085
		0.085	0.0087	0.0083

TABLE 7

NACA 0030 without flap. Square ends, on pips

$R = 0.31 \times 10^6, \quad P = 1 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 6.56, \quad V = 74.9 \text{ ft./sec.}$

$R = 0.67 \times 10^6, \quad P = 2.40 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 13.1, \quad V = 68.8 \text{ ft./sec.}$

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.1 ₅	-0.012	0.0209	0.0209	-0.0007
+ 0.8 ₅	+0.042	0.0206	0.0205	+0.0046
1.9 ₅	0.100	0.0213	0.0207	0.0098
5.0	0.270	0.0260	0.0220	0.0234
8.1	0.435	0.0348	0.0243	0.0348
11.1 ₅	0.583	0.0477	0.0288	0.0471
13.2 ₅	0.682	0.0603	0.0345	0.0523
15.2 ₅	0.791	0.0799	0.0452	0.0499
17.3 ₅	0.882	0.0995	0.0563	0.0440
19.4 ₅	0.939	0.117	0.068	0.0428
21.6	0.981	0.140	0.086	0.0393
23.7	1.024	0.170	0.111	0.0284
24.8	1.015	0.187	0.130	0.0213
25.9 ₅	1.001	0.207	0.151	+0.0142
27.5	0.282	0.456	0.451	-0.0028
17.7*	0.356	0.197	0.190	+0.0097
19.9 ₅ *	0.251	0.242	0.239	+0.0042
22.0 ₅ *	0.261	0.272	0.268	-0.0038
24.2 ₅ *	0.258	0.292	0.289	-0.0068
25.3*	0.267	0.302	0.294	-0.0087
26.4 ₅ *	0.273	0.314	0.310	-0.0091

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.2	-0.013	0.0172	0.0172	-0.0016
+ 0.8	+0.039	0.0172	0.0171	+0.0048
1.9	0.094	0.0181	0.0176	0.0112
5.0	0.258	0.0225	0.0188	0.0281
8.0 ₅	0.423	0.0314	0.0214	0.0410
11.1	0.584	0.0456	0.0266	0.0503
14.2	0.731	0.0648	0.0351	0.0554
16.2 ₅	0.824	0.0836	0.0458	0.0524
18.4	0.908	0.106	0.055	0.0465
20.4 ₅	0.978	0.132	0.079	0.0384
22.6	1.007	0.165	0.108	0.0268
23.7	0.998	0.186	0.131	0.0188
24.8	0.979	0.205	0.152	0.0125
25.9 ₅	0.964	0.221	0.171	0.0072
27.0	0.953	0.236	0.186	0.0022

* Decreasing incidence.

$R = 1.24 \times 10^6, \quad P = 4.30 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 24.7, \quad V = 70.1 \text{ ft./sec.}$

$R = 2.19 \times 10^6, \quad P = 8.2 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 41.3, \quad V = 66.1 \text{ ft./sec.}$

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.3 ₅	-0.018	0.0147	0.0147	-0.0025
+ 0.7 ₅	+0.034	0.0152	0.0151	+0.0040
1.7 ₅	0.086	0.0158	0.0154	0.0107
2.8	0.140	0.0168	0.0157	0.0171
4.9	0.247	0.0197	0.0173	0.0287
7.9 ₅	0.415	0.0283	0.0187	0.0414
11.0 ₅	0.587	0.0422	0.0230	0.0499
14.1 ₅	0.729	0.0631	0.0335	0.0527
17.2 ₅	0.857	0.0937	0.0528	0.0478
19.4	0.917	0.119	0.072	0.0409
20.4	0.945	0.134	0.085	0.0358
21.4 ₅	0.945	0.152	0.103	0.0292
22.5 ₅	0.929	0.172	0.124	0.0229
24.7 ₅	0.901	0.205	0.160	0.0130
26.9	0.889	0.237	0.193	0.0035

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.4	-0.020	0.0139	0.0139	-0.0023
+ 0.7	+0.032	0.0141	0.0140	+0.0041
1.7	0.084	0.0143	0.0139	0.0108
3.8	0.192	0.0166	0.0146	0.0227
6.9	0.366	0.0239	0.0165	0.0359
9.9 ₅	0.539	0.0358	0.0197	0.0444
12.0	0.653	0.0481	0.0245	0.0474
14.1	0.750	0.0648	0.0336	0.0467
16.1 ₅	0.818	0.0905	0.0534	0.0409
18.3	0.849	0.123	0.083	0.0321
19.3 ₅	0.861	0.139	0.098	0.0278
20.4	0.875	0.167	0.125	0.0228
21.4 ₅	0.871	0.177	0.135	0.0171
22.5 ₅	0.870	0.194	0.152	0.0120
24.7 ₅	0.819	0.226	0.189	+0.0020
26.9	0.812	0.254	0.218	-0.0072

TABLE 7 (contd.)

$R = 4.22 \times 10^6$, $P = 12.6$ atmos.,
 $\frac{1}{2}\rho V^2 = 103.5$, $V = 85.0$ ft./sec.

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.2 ₅	-0.015	0.0143	0.0143	-0.0017
+ 0.8	+0.039	0.0142	0.0141	+0.0048
1.8 ₅	0.091	0.0147	0.0142	0.0107
3.9 ₅	0.202	0.0169	0.0146	0.0218
7.0 ₅	0.377	0.0244	0.0165	0.0345
10.1	0.550	0.0370	0.0202	0.0445
12.1 ₅	0.645	0.0496	0.0265	0.0494
14.3	0.701	0.0722	0.0450	0.0469
15.3	0.715	0.0872	0.0588	0.0437
16.3 ₅	0.728	0.102	0.073	0.0406
17.4 ₅	0.746	0.117	0.086	0.0370
18.5	0.743	0.135	0.104	0.0343
20.6 ₅	0.705	0.176	0.148	0.0193
22.8 ₅	0.657	0.208	0.184	0.0109

$R = 5.52 \times 10^6$, $P = 18.6$ atmos.,
 $\frac{1}{2}\rho V^2 = 125.5$, $V = 77.7$ ft./sec.

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.2 ₅	-0.017	0.0145	0.0145	-0.0022
+ 0.8	+0.040	0.0144	0.0143	+0.0041
1.8 ₅	0.096	0.0149	0.0144	0.0100
2.9	0.152	0.0158	0.0145	0.0156
4.9 ₅	0.265	0.0191	0.0149	0.0258
8.0 ₅	0.441	0.0283	0.0175	0.0382
11.1 ₅	0.610	0.0428	0.0222	0.0476
12.1 ₅	0.659	0.0493	0.0253	0.0498
13.2	0.706	0.0579	0.0302	0.0502
14.2 ₅	0.733	0.0701	0.0403	0.0482
15.3	0.721	0.0881	0.0593	0.0448
16.3 ₅	0.727	0.104	0.074	0.0410
17.4 ₅	0.734	0.121	0.091	0.0369
19.6	0.696	0.160	0.133	0.0252
21.8	0.625	0.195	0.173	0.0157

$R = 7.07 \times 10^6$, $P = 22.8$ atmos.,
 $\frac{1}{2}\rho V^2 = 166.0$, $V = 80.5$ ft./sec.

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.4	-0.020	0.0143	0.0143	-0.0028
+ 0.6 ₅	+0.040	0.0142	0.0141	+0.0033
1.7	0.094	0.0147	0.0142	0.0090
2.7 ₅	0.152	0.0159	0.0146	0.0144
4.8	0.269	0.0188	0.0148	0.0247
7.9	0.442	0.0282	0.0174	0.0370
11.0	0.619	0.0427	0.0215	0.0457
13.0 ₅	0.709	0.0565	0.0286	0.0497
14.1	0.746	0.0675	0.0366	0.0482
15.1 ₅	0.749	0.0849	0.0538	0.0428
16.2	0.744	0.102	0.071	0.0400
17.3	0.743	0.120	0.089	0.0357
19.5	0.663	0.162	0.138	0.0241
21.6 ₅	0.619	0.196	0.175	0.0138

TABLE 8

NACA 0030, without flap, rounded ends, on V's

$R = 0.30 \times 10^6, \quad P = 1 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 6.56, \quad V = 75.3 \text{ ft./sec.}$

$R = 0.65 \times 10^6, \quad P = 2.30 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 13.1, \quad V = 70.4 \text{ ft./sec.}$

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.3	-0.013	0.0187	0.0187	-0.0018
+ 1.0	+0.050	0.0181	0.0180	+0.0053
2.3	0.118	0.0185	0.0178	0.0126
4.8 ₅	0.253	0.0211	0.0177	0.0270
8.6 ₅	0.452	0.0283	0.0176	0.0484
12.4 ₅	0.637	0.0446	0.0233	0.0635
16.1 ₅	0.818	0.0714	0.0363	0.0665
18.6 ₅	0.925	0.0947	0.0475	0.0625
21.1 ₅	0.993	0.120	0.065	0.0589
22.4	1.015	0.137	0.080	0.0533
23.7	1.027	0.157	0.099	0.0459
25.0	1.023	0.183	0.125	0.0364
26.2 ₅	1.010	0.206	0.149	+0.0272
28.0	0.298	0.336	0.331	-0.0063
19.1 ₅ *	0.248	0.218	0.215	+0.0155
21.7*	0.243	0.262	0.260	0.0056
22.9*	0.257	0.281	0.277	+0.0019
24.2*	0.264	0.295	0.292	-0.0010
25.5*	0.271	0.309	0.305	-0.0033
26.7 ₅ *	0.285	0.323	0.319	-0.0058

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.6	-0.028	0.0138	0.0138	-0.0051
+ 0.7	+0.036	0.0129	0.0129	+0.0038
2.0 ₅	0.094	0.0138	0.0133	0.0120
4.6	0.224	0.0159	0.0133	0.0285
8.3 ₅	0.420	0.0245	0.0153	0.0498
12.2	0.597	0.0419	0.0232	0.0632
15.8 ₅	0.763	0.0683	0.0377	0.0674
18.4	0.866	0.0951	0.0558	0.0607
20.9	0.940	0.127	0.081	0.0501
22.1 ₅	0.957	0.145	0.097	0.0432
23.4 ₅	0.957	0.168	0.120	0.0348
24.7 ₅	0.954	0.192	0.144	0.0271
26.0	0.925	0.211	0.166	0.0204
27.2 ₅	0.919	0.230	0.186	0.0140

$R = 1.20 \times 10^6, \quad P = 4.20 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 24.7, \quad V = 71.3 \text{ ft./sec.}$

$R = 2.13 \times 10^6, \quad P = 7.7 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 41.3, \quad V = 68.4 \text{ ft./sec.}$

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.8	-0.035	0.0119	0.0119	-0.0061
+ 0.5 ₅	+0.025	0.0116	0.0116	+0.0023
1.8 ₅	0.088	0.0119	0.0115	0.0115
4.4	0.212	0.0142	0.0118	0.0285
8.1 ₅	0.411	0.0233	0.0144	0.0477
12.0	0.598	0.0409	0.0221	0.0589
15.6 ₅	0.756	0.0718	0.0418	0.0588
18.2	0.827	0.106	0.070	0.0480
19.4 ₅	0.856	0.128	0.089	0.0401
20.7 ₅	0.862	0.152	0.113	0.0330
22.0	0.870	0.172	0.132	0.0265
23.3	0.870	0.191	0.151	0.0213
24.6	0.862	0.208	0.169	0.0165

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 0.5	-0.015	0.0116	0.0116	-0.0043
+ 0.8	+0.042	0.0110	0.0109	+0.0050
2.1 ₅	0.104	0.0119	0.0113	0.0142
4.7	0.226	0.0143	0.0116	0.0324
8.4 ₅	0.422	0.0239	0.0145	0.0537
12.3	0.617	0.0413	0.0213	0.0631
15.9 ₅	0.757	0.0730	0.0430	0.0621
17.2 ₅	0.777	0.0889	0.0573	0.0578
18.5 ₅	0.799	0.109	0.0755	0.0509
19.8	0.810	0.132	0.0980	0.0442
21.0 ₅	0.824	0.154	0.119	0.0390
22.3 ₅	0.813	0.178	0.143	0.0316
23.6 ₅	0.788	0.196	0.163	0.0240
26.2	0.800	0.236	0.202	0.0140

* Decreasing incidence.

TABLE 8 (contd.)

$R = 4.17 \times 10^6$, $P = 12.4$ atmos.,
 $\frac{1}{2}\rho V^2 = 103.5$, $V = 85.7$ ft./sec.

$R = 5.28 \times 10^6$, $P = 17.3$ atmos.,
 $\frac{1}{2}\rho V^2 = 125.5$, $V = 80.8$ ft./sec.

α deg	C _L	C _D	C _{D,0}	C _m		α deg.	C _L	C _D	C _{D,0}	C _m
- 0.7 ₅	-0.033	0.0122	0.0121	-0.0053		- 0.7 ₅	-0.039	0.0121	0.0120	-0.0064
+ 0.6	+0.028	0.0120	0.0120	+0.0029		+ 0.5 ₅	+0.025	0.0117	0.0117	+0.0017
1.9	0.092	0.0122	0.0118	0.0121		1.8 ₅	0.090	0.0120	0.0116	0.0105
4.4 ₅	0.225	0.0147	0.0121	0.0277		4.4	0.225	0.0145	0.0119	0.0262
8.2	0.432	0.0242	0.0144	0.0436		6.9	0.359	0.0201	0.0134	0.0387
12.0	0.615	0.0433	0.0235	0.0577		10.7	0.567	0.0352	0.0183	0.0526
15.7 ₅	0.700	0.0864	0.0607	0.0522		13.2	0.672	0.0521	0.0291	0.0580
17.0 ₅	0.716	0.105	0.078	0.0488		14.4 ₅	0.701	0.0664	0.0406	0.0558
18.3 ₅	0.708	0.124	0.098	0.0428		15.7	0.703	0.0881	0.0622	0.0506
19.6	0.683	0.148	0.123	0.0366		17.0	0.705	0.107	0.081	0.0466
20.9	0.678	0.171	0.147	0.0291		18.3	0.688	0.127	0.102	0.0402
22.2	0.653	0.192	0.169	0.0220		19.6	0.663	0.152	0.129	0.0332
23.5	0.649	0.210	0.188	0.0167		20.9	0.636	0.175	0.153	0.0265

$R = 7.20 \times 10^6$, $P = 23.8$ atmos.,
 $\frac{1}{2}\rho V^2 = 166.0$, $V = 79.1$ ft./sec.

α deg	C _L	C _D	C _{D,0}	C _m
- 0.8	-0.035	0.0131	0.0131	-0.0058
+ 0.5 ₅	+0.024	0.0128	0.0128	+0.0026
1.8 ₅	0.089	0.0131	0.0127	0.0112
4.4	0.222	0.0161	0.0135	0.0264
8.1 ₅	0.423	0.0259	0.0165	0.0436
10.7	0.555	0.0363	0.0202	0.0523
11.9 ₅	0.614	0.0441	0.0243	0.0559
13.2	0.661	0.0530	0.0301	0.0569
14.5	0.675	0.0683	0.0444	0.0546
15.7 ₅	0.680	0.0908	0.0666	0.0491
17.0 ₅	0.680	0.0981	0.0739	0.0463
18.3	0.682	0.128	0.104	0.0406
19.6	0.630	0.154	0.133	0.0323
22.2	0.550	0.200	0.183	0.0178

TABLE 9

NACA 0030 with 15 per cent. flap at 90 deg., square ends, on pips

$R = 0.30 \times 10^6, \quad P = 1 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 6.57, \quad V = 75.4 \text{ ft./sec.}$

$R = 0.67 \times 10^6, \quad P = 2.40 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 13.1, \quad V = 59.0 \text{ ft./sec.}$

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 5.0 ₅	0.715	0.174	0.145	-0.229
- 1.9 ₅	0.961	0.202	0.150	-0.243
+ 1.1 ₅	1.205	0.233	0.152	-0.252
4.2	1.437	0.271	0.157	-0.260
7.2 ₅	1.658	0.313	0.160	-0.265
10.3	1.866	0.357	0.164	-0.266
13.3	2.057	0.402	0.168	-0.266
14.3	2.130	0.415	0.162	-0.265
15.4	2.184	0.424	0.160	-0.260
16.4	2.135	0.431	0.177	-0.242
17.5 ₅	2.037	0.436	0.206	-0.224
19.8	1.848	0.460	0.271	-0.204
22.0 ₅	1.667	0.486	0.332	-0.196
23.7	0.852	0.661	0.621	-0.241
15.1*	0.993	0.515	0.460	-0.245
16.2*	0.932	0.540	0.492	-0.247
17.2 ₅ *	0.914	0.558	0.511	-0.249
18.3 ₅ *	0.909	0.582	0.535	-0.251
20.4 ₅ *	0.911	0.622	0.575	-0.252
22.6*	0.875	0.656	0.613	-0.243

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 5.0 ₅	0.689	0.164	0.137	-0.221
- 2.0	0.949	0.192	0.142	-0.237
+ 1.1	1.195	0.226	0.146	-0.249
4.1 ₅	1.422	0.263	0.151	-0.256
7.2	1.657	0.302	0.150	-0.261
10.2 ₅	1.867	0.349	0.155	-0.266
13.2 ₅	2.060	0.395	0.159	-0.266
14.3	2.104	0.410	0.164	-0.265
15.3 ₅	2.162	0.419	0.160	-0.257
16.4	2.043	0.425	0.193	-0.236
17.6 ₅	1.889	0.432	0.234	-0.220
18.7 ₅	1.787	0.446	0.268	-0.212
21.0	1.638	0.471	0.321	-0.207

$R = 1.28 \times 10^6, \quad P = 4.60 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 24.7, \quad V = 67.8 \text{ ft./sec.}$

$R = 2.15 \times 10^6, \quad P = 7.8 \text{ atmos.},$
 $\frac{1}{2}\rho V^2 = 41.3, \quad V = 67.5 \text{ ft./sec.}$

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 5.0 ₅	0.683	0.160	0.134	-0.217
- 2.0	0.943	0.187	0.138	-0.231
+ 1.1	1.194	0.221	0.142	-0.245
4.1 ₅	1.431	0.258	0.144	-0.252
7.2	1.648	0.300	0.150	-0.259
10.2 ₅	1.850	0.345	0.154	-0.262
13.2 ₅	2.047	0.395	0.163	-0.265
14.3	2.112	0.414	0.166	-0.265
15.3 ₅	2.180	0.429	0.165	-0.266
16.3	2.230	0.455	0.178	-0.265
17.3 ₅	2.277	0.462	0.173	-0.263
18.8	1.694	0.463	0.303	-0.217
19.9	1.618	0.474	0.329	-0.214
21.0 ₅	1.546	0.484	0.351	-0.211
17.7*	1.753	0.447	0.276	-0.223

α deg.	C_L	C_D	$C_{D,0}$	C_m
- 5.1	0.665	0.156	0.131	-0.120
- 2.0 ₅	0.936	0.185	0.136	-0.228
+ 1.0 ₅	1.183	0.218	0.140	-0.239
4.1	1.417	0.258	0.147	-0.249
7.1 ₅	1.640	0.303	0.153	-0.256
10.2	1.827	0.351	0.165	-0.260
13.2	2.025	0.400	0.173	-0.263
14.2 ₅	2.080	0.417	0.177	-0.264
15.3	2.155	0.435	0.177	-0.265
16.2 ₅	2.210	0.453	0.182	-0.265
17.3 ₅	2.250	0.470	0.189	-0.265
18.3 ₅	2.315	0.470	0.172	-0.261
19.9	1.543	0.481	0.349	-0.214
20.0 ₅	1.499	0.489	0.364	-0.211
17.7*	1.711	0.457	0.295	-0.223
18.8*	1.637	0.470	0.321	-0.218

* Decreasing incidence.

TABLE 9 (contd.)

$R = 4.42 \times 10^6$, $P = 14.0$ atmos., $R = 5.39 \times 10^6$, $P = 16.9$ atmos.,
 $\frac{1}{2}\rho V^2 = 103.5$, $V = 80.7$ ft./sec. $\frac{1}{2}\rho V^2 = 125.5$, $V = 80.7$ ft./sec.

α deg.	C _L	C _D	C _{D,0}	C _m		α deg.	C _L	C _D	C _{D,0}	C _m
- 4.9	0.640	0.150	0.126	-0.200		- 4.9	0.627	0.149	0.127	-0.198
- 1.8 ₅	0.907	0.179	0.133	-0.218		- 1.8 ₅	0.887	0.177	0.133	-0.214
+ 1.2	1.163	0.214	0.139	-0.232		+ 1.2	1.152	0.214	0.140	-0.231
4.2 ₅	1.405	0.254	0.145	-0.244		4.2 ₅	1.396	0.254	0.146	-0.242
7.3	1.631	0.297	0.150	-0.251		7.3	1.617	0.298	0.152	-0.251
10.3 ₅	1.830	0.347	0.160	-0.258		10.3 ₅	1.840	0.345	0.156	-0.257
13.3 ₅	2.040	0.397	0.165	-0.262		13.4	2.025	0.395	0.167	-0.261
14.4	2.110	0.412	0.164	-0.262		14.4	2.100	0.414	0.169	-0.262
15.4 ₅	2.175	0.430	0.168	-0.263		15.4 ₅	2.162	0.430	0.170	-0.263
16.4	2.220	0.451	0.178	-0.263		16.4 ₅	2.215	0.451	0.178	-0.264
17.4 ₅	2.280	0.466	0.178	-0.262		18.1	1.350	0.472	0.370	-0.215
19.0	1.550	0.480	0.447	-0.231		19.2	1.283	0.488	0.397	-0.215
20.1	1.478	0.495	0.374	-0.219		20.2 ₅	1.237	0.503	0.418	-0.215
16.8*	1.650	0.434	0.283	-0.225		15.9*	1.485	0.427	0.305	-0.222
17.9*	1.615	0.463	0.318	-0.225		16.9 ₅ *	1.418	0.455	0.344	-0.220

* Decreasing incidence.

TABLE 10A

Minimum profile drag of NACA 0030 (on balance)

P atmos.	Square ends, pips		Square ends, V's		Rounded ends, V's	
	R × 10 ⁻⁶	C _{D,0}	R × 10 ⁻⁶	C _{D,0}	R × 10 ⁻⁶	C _{D,0}
1	0.31	0.0208	0.31	0.0209	0.30	0.0183
2	0.36	0.0190	0.35	0.0212	0.35	0.0169
2	0.52	0.0181	0.51	0.0183	0.49	0.0154
2	0.67	0.0172	0.67	0.0164	0.65	0.0134
2	0.81	0.0161	0.81	0.0161	0.77	0.0127
4	0.69	0.0161	0.76	0.0160	0.68	0.0135
4	0.90	0.0156	0.98	0.0152	0.88	0.0123
4	1.24	0.0151	1.36	0.0143	1.21	0.0117
4	1.47	0.0151	1.61	0.0144	1.44	0.0113
8	1.26	0.0150	1.26	0.0145	1.23	0.0115
8	1.61	0.0143	1.61	0.0139	1.60	0.0111
8	2.19	0.0139	2.20	0.0134	2.13	0.0113
8	2.69	0.0141	2.72	0.0136	2.64	0.0111
12	1.90	0.0139	1.98	0.0136	1.88	0.0110
12	2.50	0.0140	2.61	0.0142	2.46	0.0109
12	3.39	0.0142	3.50	0.0161	3.31	0.0113
12	4.22	0.0141	4.15	0.0157	4.18	0.0119
18	3.45	0.0141	3.61	0.0146	3.53	0.0113
18	4.70	0.0144	4.89	0.0150	4.80	0.0116
18	5.52	0.0143	5.53	0.0149	5.28	0.0117
18	5.86	0.0145	6.12	0.0152	5.99	0.0119
23	4.47	0.0142	4.68	0.0146	4.48	0.0118
23	6.83	0.0147	6.82	0.0150	6.57	0.0119
23	7.07	0.0143	7.39	0.0164	7.20	0.0128
23	8.14	0.0158	8.18	0.0157	8.42	0.0132

TABLE 10B
Minimum profile drag of NACA 0030 (momentum method)

<i>P</i> atmos.	0.1 <i>c</i> behind T.E.		0.5 <i>c</i> behind T.E.	
	<i>R</i> × 10 ⁻⁶	<i>C</i> _{D,0}	<i>R</i> × 10 ⁻⁶	<i>C</i> _{D,0}
1	0.31	0.0152	0.30	0.0157
2	0.60	0.0134	0.61	0.0131
3	0.85	0.0124	0.86	0.0122
5	1.27	0.0124	1.26	0.0114
8	2.17	0.0121	2.07	0.0120
11	3.41	0.0126	3.24	0.0126
15	4.32	0.0128	4.22	0.0129
19	5.38	0.0127	5.24	0.0124
24	7.86	0.0126	7.89	0.0125

TABLE 11
Values of $dC_L/d\alpha$ and $dC_m/d\alpha$ (α in degrees) at $\alpha = 0$. Aspect Ratio 6

Aerofoil NACA 0012			NACA 0015			NACA 0030								
						Square Ends on Pips			Square Ends on V's			Rounded Ends on V's		
<i>R</i> × 10 ⁻⁶	$dC_L/d\alpha$	$dC_m/d\alpha$	<i>R</i> × 10 ⁻⁶	$dC_L/d\alpha$	$dC_m/d\alpha$	<i>R</i> × 10 ⁻⁶	$dC_L/d\alpha$	$dC_m/d\alpha$	<i>R</i> × 10 ⁻⁶	$dC_L/d\alpha$	$dC_m/d\alpha$	<i>R</i> × 10 ⁻⁶	$dC_L/d\alpha$	$dC_m/d\alpha$
0.31	0.070	0.0020	0.30	0.072	0.0027	0.31	0.054	0.0047	0.31	0.053	0.0047	0.31	0.052	0.0055
0.63	0.071	0.0019	0.67	0.070	0.0020	0.67	0.052	0.0056	0.67	0.052	0.0055	0.65	0.049	0.0060
0.98	0.071	0.0016												
1.45	0.072 ₅	0.0016	1.27	0.070	0.0018	1.24	0.052	0.0058	1.36	0.052	0.0054	1.21	0.049	0.0061
1.99	0.072 ₅	0.0015	2.20	0.072	0.0017	2.19	0.053	0.0059	2.20	0.052	0.0056	2.13	0.049	0.0066
3.02	0.072 ₅	0.0012												
3.94	0.074 ₅	0.0014	4.25	0.073	0.0014	4.22	0.054	0.0054	4.15	0.051	0.0054	4.17	0.051	0.0060
5.52	0.075	0.0013	5.55	0.074	0.0014	5.52	0.055	0.0052	5.53	0.054	0.0054	5.28	0.051	0.0057
7.20	0.074 ₅	0.0013	7.4	0.073	0.0013	7.07	0.056	0.0052	7.39	0.051	0.0055	7.20	0.051	0.0058

TABLE 12

NACA 0012 with 15 per cent. flap at 90 deg.

$R = 0.31 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 6.62,$

$P = 1 \text{ atmos.},$
 $V = 74.4 \text{ ft./sec.}$

$R = 0.70 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 13.1,$

$P = 2.54 \text{ atmos.},$
 $V = 66.1 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 6.2 ₅	0.466	0.174	-0.180
- 4.3	0.632	0.188	-0.186
- 2.1 ₅	0.785	0.203	-0.187
+ 1.0 ₅	0.996	0.226	-0.186
4.2	1.190	0.252	-0.180
7.3	1.377	0.281	-0.175
8.3	1.450	0.293	-0.176
9.3 ₅	1.507	0.304	-0.174
10.4	1.568	0.317	-0.175
11.7	1.174	0.438	-0.247
12.8 ₅	1.100	0.463	-0.244
15.0	1.040	0.504	-0.240
9.3 ₅ *	1.445	0.355	-0.219
10.5 ₅ *	1.316	0.403	-0.242

α deg.	C_L	C_D	C_m
- 6.2	0.379	0.175	-0.177
- 4.2 ₅	0.623	0.187	-0.182
- 2.1	0.783	0.201	-0.184
+ 1.0	1.005	0.224	-0.186
4.2	1.209	0.251	-0.184
7.3 ₅	1.405	0.282	-0.181
9.3 ₅	1.530	0.303	-0.176
10.4 ₅	1.586	0.321	-0.178
11.4	1.669	0.328	-0.177
12.5	1.727	0.342	-0.177
13.5 ₅	1.775	0.353	-0.175
14.5	1.870	0.362	-0.174
15.5	1.900	0.378	-0.176
16.5 ₅	1.957	0.388	-0.175
18.1	1.085	0.603	-0.259
19.1	1.095	0.640	-0.261
21.2 ₅	1.102	0.703	-0.271
10.4 ₅ *	1.473	0.378	-0.222
11.6*	1.298	0.430	-0.243
12.7 ₅ *	1.233	0.461	-0.247
13.9*	1.165	0.485	-0.246
14.9 ₅ *	1.090	0.512	-0.246
16.0*	1.089	0.539	-0.249
17.0 ₅ *	1.106	0.580	-0.268

$R = 1.23 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 24.7,$

$P = 4.27 \text{ atmos.},$
 $V = 70.0 \text{ ft. sec.}$

$R = 2.07 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 41.3,$

$P = 7.7 \text{ atmos.},$
 $V = 68.4 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 6.3	0.453	0.173	-0.175
- 4.2 ₅	0.616	0.185	-0.179
- 2.1	0.774	0.200	-0.182
+ 1.0 ₅	1.001	0.223	-0.184
4.2 ₅	1.210	0.249	-0.182
7.3 ₅	1.404	0.282	-0.179
10.4	1.594	0.314	-0.176
12.3 ₅	1.720	0.341	-0.174
14.5 ₅	1.834	0.369	-0.172
15.5 ₅	1.900	0.381	-0.172
16.6	1.960	0.397	-0.171
17.6	2.010	0.409	-0.171
18.5 ₅	2.070	0.421	-0.172
20.2	1.130	0.672	-0.269
22.2 ₅	1.252	0.715	-0.273
12.6 ₅ *	1.500	0.422	-0.226
14.8 ₅ *	1.288	0.488	-0.231
15.9 ₅ *	1.206	0.510	-0.243
18.1*	1.124	0.598	-0.258
19.1*	1.131	0.634	-0.267

α deg.	C_L	C_D	C_m
- 6.3	0.436	0.171	-0.171
- 4.3	0.599	0.182	-0.174
- 2.1	0.744	0.196	-0.177
+ 1.1	0.980	0.221	-0.179
4.2 ₅	1.192	0.252	-0.179
7.4	1.412	0.283	-0.178
10.5	1.587	0.316	-0.176
12.6	1.708	0.343	-0.174
14.6	1.847	0.370	-0.172
15.8	1.532	0.395	-0.166
16.6 ₅	1.957	0.397	-0.170
17.6 ₅	2.013	0.409	-0.171
18.6 ₅	2.053	0.425	-0.169
19.7 ₅	2.110	0.476	-0.167
21.2	1.172	0.600	-0.246
22.3	1.162	0.640	-0.250
24.5 ₅	1.093	0.698	-0.249
16.8 ₅ *	1.510	0.469	-0.226
17.9 ₅ *	1.389	0.504	-0.239
18.9 ₅ *	1.324	0.554	-0.245
20.1 ₅ *	1.221	0.583	-0.237

* Decreasing incidence.

TABLE 12 (contd.)

$R = 4.14 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 103.5,$
 $P = 12.3$ atmos.,
 $V = 85.7$ ft./sec.
 $R = 5.60 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 125.5,$
 $P = 18.4$ atmos.,
 $V = 76.9$ ft./sec.

α deg.	C _L	C _D	C _m	α deg.	C _L	C _D	C _m
- 6.3 ₅	0.434	0.168	-0.170	- 6.4	0.438	0.170	-0.172
- 4.3 ₅	0.597	0.180	-0.174	- 4.3 ₅	0.602	0.181	-0.177
- 2.1	0.757	0.195	-0.176	- 2.1	0.759	0.195	-0.177
+ 1.1	0.980	0.218	-0.177	+ 1.2	0.989	0.220	-0.178
4.3 ₅	1.196	0.247	-0.177	4.3 ₅	1.204	0.250	-0.179
7.5	1.400	0.277	-0.175	7.5 ₅	1.420	0.281	-0.177
10.6 ₅	1.600	0.313	-0.173	10.7	1.607	0.316	-0.175
12.8	1.720	0.335	-0.172	12.8 ₅	1.720	0.343	-0.174
14.8 ₅	1.850	0.366	-0.169	13.9 ₅	1.801	0.356	-0.172
15.8 ₅	1.905	0.380	-0.169	15.9 ₅	1.910	0.385	-0.170
16.8 ₅	1.970	0.394	-0.169	16.9 ₅	1.970	0.396	-0.170
17.9 ₅	2.015	0.409	-0.168	18.0	2.040	0.414	-0.171
18.9	2.060	0.423	-0.169	19.0 ₅	2.085	0.431	-0.172
20.1	1.158	0.575	-0.245	20.1 ₅	1.140	0.585	-0.249
22.2	1.162	0.646	-0.265	22.2	1.160	0.664	-0.265
14.8 ₅ *	1.593	0.403	-0.203	15.9 ₅ *	1.495	0.455	-0.218
15.9*	1.517	0.443	-0.213	18.0*	1.273	0.539	-0.251
16.9*	1.383	0.493	-0.242	19.0*	1.165	0.557	-0.245
19.0*	1.183	0.547	-0.243				

TABLE 13

NACA 23012 with 15 per cent. flap at 90 deg.

$R = 0.31 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 6.77,$
 $P = 1$ atmos.,
 $V = 76.1$ ft./sec.
 $R = 0.81 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 15.1,$
 $P = 3.02$ atmos.,
 $V = 65.6$ ft./sec.

α deg.	C _L	C _D	C _m	α deg.	C _L	C _D	C _m
- 6.9 ₅	0.449	0.168	-0.166	- 7.0	0.447	0.164	-0.163
- 5.1	0.616	0.182	-0.180	- 5.1	0.606	0.179	-0.174
- 1.1 ₅	0.897	0.212	-0.183	- 1.1 ₅	0.923	0.212	-0.186
+ 2.9 ₅	1.149	0.244	-0.180	+ 3.0	1.202	0.245	-0.185
7.1 ₅	1.402	0.283	-0.174	7.1 ₅	1.471	0.283	-0.181
10.1 ₅	1.602	0.319	-0.174	10.2	1.656	0.320	-0.179
12.2	1.713	0.344	-0.176	12.2	1.769	0.346	-0.178
13.3	1.772	0.359	-0.177	13.3 ₅	1.839	0.361	-0.179
14.3	1.838	0.368	-0.180	14.3 ₅	1.898	0.376	-0.181
14.7 ₅	1.086	0.501	-0.237	15.4	1.957	0.388	-0.180
15.8 ₅	1.058	0.523	-0.236	16.4	2.018	0.405	-0.183
17.9 ₅	1.069	0.587	-0.249	17.4	2.072	0.417	-0.186
12.4 ₅ *	1.262	0.447	-0.235	19.0	1.146	0.633	-0.256
13.7*	1.136	0.475	-0.234	20.0	1.156	0.666	-0.262
				22.1 ₅	1.152	0.722	-0.269
				15.7*	1.366	0.507	-0.232
				16.7 ₅ *	1.248	0.670	-0.229
				17.8 ₅ *	1.162	0.592	-0.247

* Decreasing incidence.

TABLE 13 (contd.)

$R = 1.27 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 25.3,$

$P = 4.42 \text{ atmos.},$
 $V = 70.1 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 7.0	0.445	0.168	-0.166
- 5.1	0.602	0.181	-0.173
- 1.1 ₅	0.929	0.214	-0.187
+ 3.0 ₅	1.206	0.248	-0.186
7.2	1.468	0.290	-0.184
10.2 ₅	1.665	0.325	-0.182
12.3	1.785	0.351	-0.181
14.4	1.910	0.378	-0.181
15.5	1.961	0.395	-0.182
16.5	2.037	0.406	-0.183
17.5	2.098	0.421	-0.184
18.5 ₅	2.153	0.439	-0.187
19.9 ₅	1.242	0.645	-0.251
22.1	1.235	0.705	-0.258
15.6*	1.628	0.423	-0.204
15.6*	1.585	0.403	-0.177
16.7*	1.494	0.454	-0.211
17.8*	1.360	0.580	-0.249
18.9 ₅ *	1.115	0.604	-0.245

$R = 2.47 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 53.9,$

$P = 8.0 \text{ atmos.},$
 $V = 76.7 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 7.0 ₅	0.438	0.167	-0.166
- 5.1 ₅	0.591	0.179	-0.170
- 1.1	0.909	0.212	-0.179
+ 3.1	1.203	0.248	-0.181
7.3 ₅	1.479	0.291	-0.180
10.4 ₅	1.675	0.327	-0.180
12.5 ₅	1.797	0.352	-0.178
14.7	1.923	0.384	-0.179
15.7	1.984	0.395	-0.179
16.7 ₅	2.045	0.411	-0.180
17.8	2.094	0.425	-0.179
18.9	2.175	0.440	-0.182
19.9	2.215	0.456	-0.184
21.1 ₅	1.217	0.577	-0.238
22.1	1.226	0.637	-0.256
23.1 ₅	1.246	0.697	-0.272
16.8*	1.552	0.458	-0.214
17.8 ₅ *	1.432	0.483	-0.223
18.9 ₅ *	1.299	0.515	-0.224
20.0 ₅ *	1.258	0.545	-0.235

$R = 4.47 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 101.6,$

$P = 14.6 \text{ atmos.},$
 $V = 78.8 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 7.1 ₅	0.450	0.169	-0.169
- 5.2	0.600	0.181	-0.174
- 1.0 ₅	0.909	0.209	-0.177
+ 3.3	1.211	0.245	-0.178
7.6	1.489	0.289	-0.177
10.7 ₅	1.688	0.327	-0.177
12.9 ₅	1.814	0.355	-0.177
15.1	1.933	0.383	-0.177
17.2 ₅	2.067	0.414	-0.180
18.3	2.134	0.430	-0.181
19.4	2.192	0.446	-0.183
20.4 ₅	2.244	0.465	-0.184
21.1 ₅	1.218	0.585	-0.242
23.1 ₅	1.212	0.712	-0.268
17.0*	1.536	0.471	-0.215
18.0*	1.469	0.502	-0.230
19.0 ₅ *	1.322	0.535	-0.235
20.1*	1.264	0.556	-0.234

$R = 5.43 \times 10^6,$
 $\frac{1}{2}\rho V^2 = 124.0,$

$P = 18.1 \text{ atmos.},$
 $V = 78.4 \text{ ft./sec.}$

α deg.	C_L	C_D	C_m
- 7.2	0.453	0.171	-0.171
- 5.2	0.599	0.180	-0.173
- 1.0	0.917	0.210	-0.178
+ 3.4	1.221	0.245	-0.178
7.7 ₅	1.501	0.290	-0.178
10.9 ₅	1.705	0.329	-0.177
13.0 ₅	1.834	0.358	-0.177
15.3	1.967	0.387	-0.178
17.4 ₅	2.076	0.419	-0.180
18.5	2.137	0.436	-0.182
19.6 ₅	2.210	0.453	-0.185
20.7	2.263	0.467	-0.185
21.1 ₅	1.204	0.600	-0.245
22.1 ₅	1.216	0.656	-0.259
24.0 ₅	1.232	0.750	-0.284
17.0 ₅ *	1.522	—	—
18.0 ₅ *	1.477	0.511	-0.229
19.1*	1.329	0.545	-0.236
20.1*	1.258	0.563	-0.234

* Decreasing incidence.

TABLE 14

RAF 28 with 15 per cent. flap at 90 deg.

$R = 0.31 \times 10^6$, $P = 1$ atmos.,
 $\frac{1}{2}\rho V^2 = 6.77$, $V = 76.7$ ft./sec.

$R = 0.78 \times 10^6$, $P = 2.88$ atmos.,
 $\frac{1}{2}\rho V^2 = 15.1$, $V = 67.6$ ft./sec.

α deg.	C_L	C_D	C_m
- 6.6	0.476	0.173	-0.174
- 4.5 ₅	0.641	0.185	-0.179
- 0.3 ₅	0.931	0.215	-0.181
+ 3.9	1.187	0.251	-0.177
8.0	1.449	0.295	-0.177
9.0 ₅	1.504	0.324	-0.185
10.1	1.496	0.366	-0.202
11.2 ₅	1.438	0.411	-0.216
12.3	1.359	0.448	-0.227
13.4 ₅	1.218	0.473	-0.231
14.5 ₅	1.126	0.497	-0.228
15.6	1.101	0.522	-0.236
16.6 ₅	1.084	0.552	-0.238

α deg.	C_L	C_D	C_m
- 6.6	0.471	0.175	-0.175
- 4.5 ₅	0.631	0.187	-0.179
- 0.3	0.948	0.221	-0.187
+ 4.0	1.217	0.254	-0.184
7.1	1.405	0.287	-0.182
9.1 ₅	1.547	0.315	-0.186
10.2	1.566	0.350	-0.192
11.2 ₅	1.523	0.399	-0.210
12.3 ₅	1.452	0.442	-0.223
14.5	1.280	0.510	-0.239
16.6 ₅	1.168	0.557	-0.238

$R = 1.27 \times 10^6$, $P = 4.52$ atmos.,
 $\frac{1}{2}\rho V^2 = 25.3$, $V = 69.9$ ft./sec.

$R = 2.43 \times 10^6$, $P = 8.0$ atmos.,
 $\frac{1}{2}\rho V^2 = 53.9$, $V = 77.1$ ft./sec.

α deg.	C_L	C_D	C_m
- 5.5	0.541	0.180	-0.174
- 3.4 ₅	0.707	0.193	-0.178
- 0.2 ₅	0.938	0.217	-0.181
+ 4.1 ₅	1.219	0.253	-0.181
7.2 ₅	1.424	0.286	-0.181
9.3	1.562	0.308	-0.182
10.3 ₅	1.592	0.333	-0.186
11.4	1.603	0.367	-0.199
12.5	1.482	0.426	-0.211
13.5 ₅	1.422	0.451	-0.225
15.6 ₅	1.232	0.532	-0.235

α deg.	C_L	C_D	C_m
- 6.6 ₅	0.458	0.175	-0.171
- 4.4	0.621	0.188	-0.176
- 0.0 ₅	0.935	0.222	-0.180
+ 4.4 ₅	1.217	0.257	-0.177
7.6 ₅	1.424	0.288	-0.180
9.8	1.559	0.312	-0.179
10.8 ₅	1.633	0.325	-0.182
11.9	1.667	0.353	-0.185
12.9	1.609	0.394	-0.203
13.9 ₅	1.560	0.435	-0.207
15.9 ₅	1.453	0.517	-0.227

TABLE 14 (contd.)

$R = 4.48 \times 10^6$,
 $\frac{1}{2}\rho V^2 = 101.6$,

$P = 14.6$ atmos.,
 $V = 78.6$ ft./sec.

$R = 5.48 \times 10^6$,
 $\frac{1}{2}\rho V^2 = 124.0$,

$P = 17.9$ atmos.,
 $V = 78.2$ ft./sec.

α deg.	C_L	C_D	C_m
- 6.7	0.461	0.175	-0.174
- 4.3 ₅	0.627	0.187	-0.176
+ 0.3	0.953	0.219	-0.179
5.0	1.252	0.258	-0.177
8.3 ₅	1.464	0.291	-0.177
10.6	1.607	0.317	-0.178
11.7	1.670	0.330	-0.180
12.9	1.732	0.345	-0.180
13.9	1.767	0.373	-0.195
14.7 ₅	1.671	0.425	-0.212
15.6 ₅	1.609	0.469	-0.223
17.5 ₅	1.478	0.529	-0.230

α deg.	C_L	C_D	C_m
- 6.7 ₅	0.456	0.175	-0.175
- 4.3	0.626	0.188	-0.176
+ 0.4 ₅	0.953	0.221	-0.177
5.2 ₅	1.268	0.260	-0.176
8.7 ₅	1.477	0.294	-0.177
11.0 ₅	1.627	0.320	-0.179
12.1 ₅	1.695	0.334	-0.179
13.3 ₅	1.752	0.349	-0.179
14.2 ₅	1.723	0.391	-0.199
15.0 ₅	1.651	0.438	-0.217
16.8 ₅	1.542	0.514	-0.232
13.3*	1.757	0.354	-0.189

TABLE 15

RAF 48, with 15 per cent. sharp-edge flap at 90 deg. Aspect ratio 6

$R = 0.31 \times 10^6$,
 $\frac{1}{2}\rho V^2 = 6.63$,

$P = 1$ atmos.,
 $V = 75.6$ ft./sec.

$R = 0.68 \times 10^6$,
 $\frac{1}{2}\rho V^2 = 13.3$,

$P = 2.47$ atmos.,
 $V = 68.4$ ft./sec.

α deg.	C_L	C_D	C_m
- 3.2	0.843	0.202	-0.201
- 0.1 ₅	1.073	0.227	-0.203
+ 3.0	1.288	0.255	-0.204
6.1	1.477	0.286	-0.200
9.1 ₅	1.668	0.322	-0.201
12.2	1.870	0.365	-0.206
13.2	1.910	0.377	-0.205
14.2	1.970	0.390	-0.206
15.4	1.760	0.409	-0.207
16.5 ₅	1.650	0.413	-0.186

α deg.	C_L	C_D	C_m
- 3.1 ₅	0.827	0.196	-0.196
- 0.0 ₅	1.059	0.224	-0.199
+ 3.0 ₅	1.262	0.248	-0.201
6.1 ₅	1.466	0.279	-0.200
9.3	1.662	0.312	-0.198
12.3	1.837	0.358	-0.201
14.3	1.968	0.385	-0.205
15.3 ₅	2.022	0.401	-0.205
16.6 ₅	1.639	0.407	-0.185
17.7 ₅	1.575	0.422	-0.183
15.5 ₅ *	1.720	0.395	-0.188

* Decreasing incidence.

TABLE 15 (contd.)

$R = 1.27 \times 10^6$, $P = 4.60$ atmos.,
 $\frac{1}{2}\rho V^2 = 25.0$, $V = 68.9$ ft./sec.

$R = 2.25 \times 10^6$, $P = 8.7$ atmos.,
 $\frac{1}{2}\rho V^2 = 41.6$, $V = 64.7$ ft./sec.

α deg.	C_L	C_D	C_m
- 3.0	0.810	0.210	-0.190
+ 0.0 ₅	1.042	0.219	-0.194
3.2	1.248	0.249	-0.196
6.3	1.448	0.280	-0.198
9.4 ₅	1.654	0.318	-0.199
12.4 ₅	1.822	0.359	-0.198
14.5 ₅	1.950	0.389	-0.201
15.5 ₅	2.03	0.402	-0.202
16.5 ₅	2.075	0.418	-0.203
17.5 ₅	2.13	0.429	-0.204
19.0	1.535	0.447	-0.189
20.0 ₅	1.465	0.458	-0.192
16.7*	1.755	0.415	-0.193
17.8 ₅ *	1.625	0.435	-0.191

α deg.	C_L	C_D	C_m
- 2.9	0.809	0.197	-0.191
+ 0.2	1.031	0.223	-0.193
3.4	1.246	0.252	-0.196
6.6	1.440	0.285	-0.197
9.7	1.652	0.322	-0.198
12.7 ₅	1.844	0.361	-0.197
14.7 ₅	1.969	0.388	-0.198
16.8 ₅	2.092	0.422	-0.201
17.8 ₅	2.148	0.435	-0.202
18.9	2.194	0.455	-0.203
20.3	1.575	0.490	-0.201
21.4	1.498	0.509	-0.205
19.2*	1.635	0.469	-0.199

$R = 3.66 \times 10^6$, $P = 14.5$ atmos.,
 $\frac{1}{2}\rho V^2 = 66.0$, $V = 62.8$ ft./sec.

$R = 4.63 \times 10^6$, $P = 24.0$ atmos.,
 $\frac{1}{2}\rho V^2 = 66.0$, $V = 49.2$ ft./sec.

α deg.	C_L	C_D	C_m
- 2.7	0.811	0.197	-0.191
+ 0.5	1.037	0.223	-0.193
3.6 ₅	1.260	0.250	-0.195
6.8 ₅	1.463	0.281	-0.195
10.0	1.657	0.320	-0.195
13.1	1.850	0.360	-0.195
16.2	2.030	0.407	-0.197
18.2 ₅	2.165	0.437	-0.201
19.3 ₅	2.225	0.452	-0.204
20.3 ₅	2.280	0.474	-0.205
21.7 ₅	1.510	0.527	-0.210
22.9	1.428	0.550	-0.217
19.5*	1.682	0.484	-0.201
20.6*	1.595	0.504	-0.207

α deg.	C_L	C_D	C_m
- 2.6	0.802	0.198	-0.190
+ 0.4 ₅	1.028	0.221	-0.191
3.6 ₅	1.245	0.249	-0.194
6.8 ₅	1.455	0.281	-0.195
10.0	1.655	0.319	-0.195
13.1	1.850	0.358	-0.195
16.2	2.035	0.407	-0.198
18.3	2.150	0.436	-0.200
19.3 ₅	2.220	0.451	-0.204
20.3 ₅	2.270	0.471	-0.203
21.7 ₅	1.473	0.529	-0.209
22.8 ₅	1.377	0.561	-0.218
19.5 ₅ *	1.650	0.481	-0.201
20.6 ₅ *	1.580	0.508	-0.209

* Decreasing incidence.

TABLE 16

RAF 48, with 20 per cent. flap at 50 deg. Aspect ratio 6

$R = 0.31 \times 10^6$, $P = 1$ atmos.,
 $\frac{1}{2}\rho V^2 = 6.63$, $V = 74.8$ ft./sec.

α deg.	C_L	C_D	C_m
- 3.1 ₅	0.837	0.172	-0.233
- 0.1 ₅	1.062	0.195	-0.235
+ 3.0	1.284	0.220	-0.233
6.1	1.490	0.254	-0.234
9.1 ₅	1.690	0.293	-0.236
12.1 ₅	1.900	0.334	-0.240
13.2	1.970	0.347	-0.241
14.3 ₅	1.880	0.356	-0.225
15.4	1.785	0.373	-0.220
16.5	1.702	0.388	-0.216
17.6	1.624	0.406	-0.216

$R = 0.68 \times 10^6$, $P = 2.40$ atmos.,
 $\frac{1}{2}\rho V^2 = 13.3$, $V = 68.9$ ft./sec.

α deg.	C_L	C_D	C_m
- 3.0 ₅	0.828	0.169	-0.231
- 0.0 ₅	1.062	0.194	-0.235
+ 3.0 ₅	1.280	0.223	-0.235
6.2	1.490	0.259	-0.237
9.2 ₅	1.692	0.297	-0.239
12.2 ₅	1.887	0.342	-0.242
14.4	2.010	0.369	-0.240
15.5	1.743	0.379	-0.225
17.7 ₅	1.588	0.409	-0.217

$R = 1.25 \times 10^6$, $P = 4.32$ atmos.,
 $\frac{1}{2}\rho V^2 = 25.0$, $V = 70.5$ ft./sec.

α deg.	C_L	C_D	C_m
- 2.9 ₅	0.828	0.170	-0.230
+ 0.0 ₅	1.054	0.194	-0.233
3.2	1.277	0.224	-0.234
6.3 ₅	1.510	0.257	-0.237
9.4 ₅	1.714	0.298	-0.239
12.4 ₅	1.900	0.342	-0.241
14.6	2.025	0.373	-0.241
15.5 ₅	2.095	0.386	-0.242
16.5 ₅	2.155	0.353	-0.246
17.8 ₅	1.670	0.419	-0.224
20.0 ₅	1.540	0.458	-0.226
16.7 ₅ *	1.770	0.402	-0.228

$R = 2.19 \times 10^6$, $P = 6.5$ atmos.,
 $\frac{1}{2}\rho V^2 = 41.6$, $V = 66.7$ ft./sec.

α deg.	C_L	C_D	C_m
- 2.8 ₅	0.813	0.166	-0.225
+ 0.2 ₅	1.042	0.196	-0.229
3.4	1.268	0.228	-0.232
6.5 ₅	1.471	0.264	-0.233
9.6 ₅	1.684	0.303	-0.234
12.7	1.892	0.345	-0.235
14.8	2.003	0.380	-0.237
16.8 ₅	2.132	0.413	-0.239
17.8 ₅	2.193	0.427	-0.241
19.1 ₅	1.680	0.453	-0.229
20.2 ₅	1.618	0.478	-0.231
18.0 ₅ *	1.758	0.435	-0.230

* Decreasing incidence.

TABLE 16 (contd.)

$R = 3.70 \times 10^6$, $P = 14.6$ atmos.,
 $\frac{1}{2}\rho V^2 = 65.7$, $V = 62.4$ ft./sec.

$R = 4.68 \times 10^6$, $P = 24.0$ atmos.,
 $\frac{1}{2}\rho V^2 = 66.0$, $V = 49.0$ ft./sec.

α deg.	C _L	C _D	C _m	α deg.	C _L	C _D	C _m
- 2.6	0.817	0.170	-0.230	- 2.5 ₅	0.820	0.169	-0.227
+ 0.5 ₅	1.046	0.197	-0.231	+ 0.5	1.052	0.196	-0.231
3.7	1.284	0.226	-0.234	3.7	1.272	0.225	-0.232
6.9	1.496	0.262	-0.234	6.9	1.482	0.258	-0.230
10.0 ₅	1.700	0.301	-0.235	10.0 ₅	1.687	0.297	-0.231
13.1 ₅	1.905	0.346	-0.237	13.1 ₅	1.903	0.344	-0.234
15.2 ₅	2.031	0.377	-0.237	15.3	2.030	0.371	-0.236
17.3	2.161	0.414	-0.231	17.3	2.165	0.411	-0.241
18.3	2.237	0.431	-0.243	18.3	2.225	0.428	-0.243
19.4	2.284	0.447	-0.244	19.4	2.300	0.444	-0.246
20.6	1.674	0.494	-0.244	20.6 ₅	1.660	0.496	-0.243
21.7 ₅	1.619	0.518	-0.246	21.7 ₅	1.591	0.521 ₅	-0.249
19.5*	1.751	0.468	-0.240	19.5*	1.740	0.465	-0.240

* Decreasing incidence.

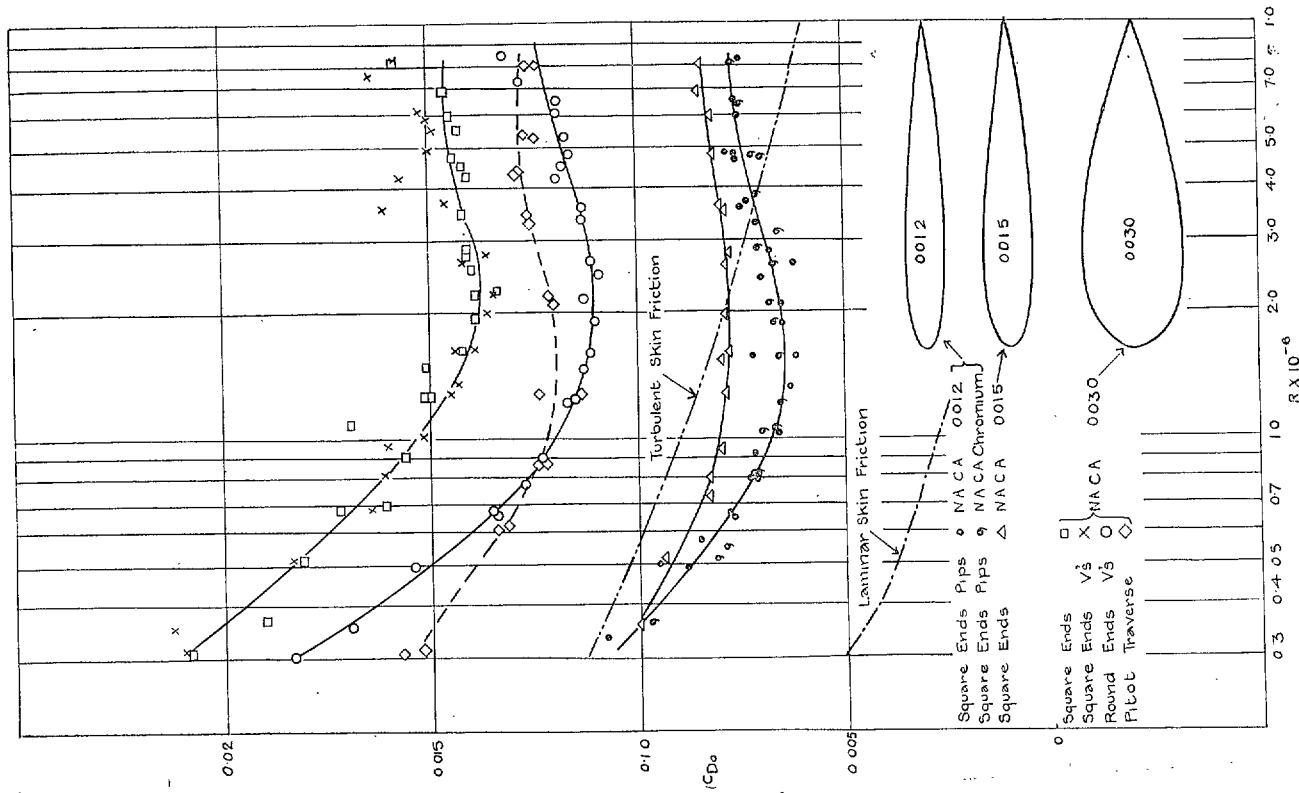


FIG. 1.

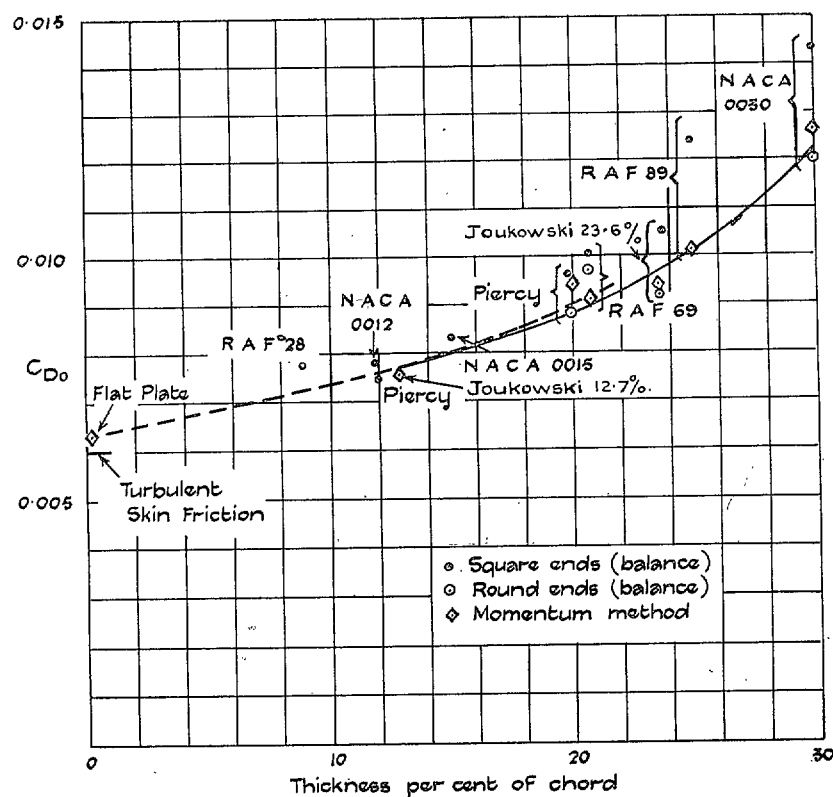


FIG. 2. Variation of minimum profile drag coefficient with thickness ratio at $R = 7 \times 10^6$.

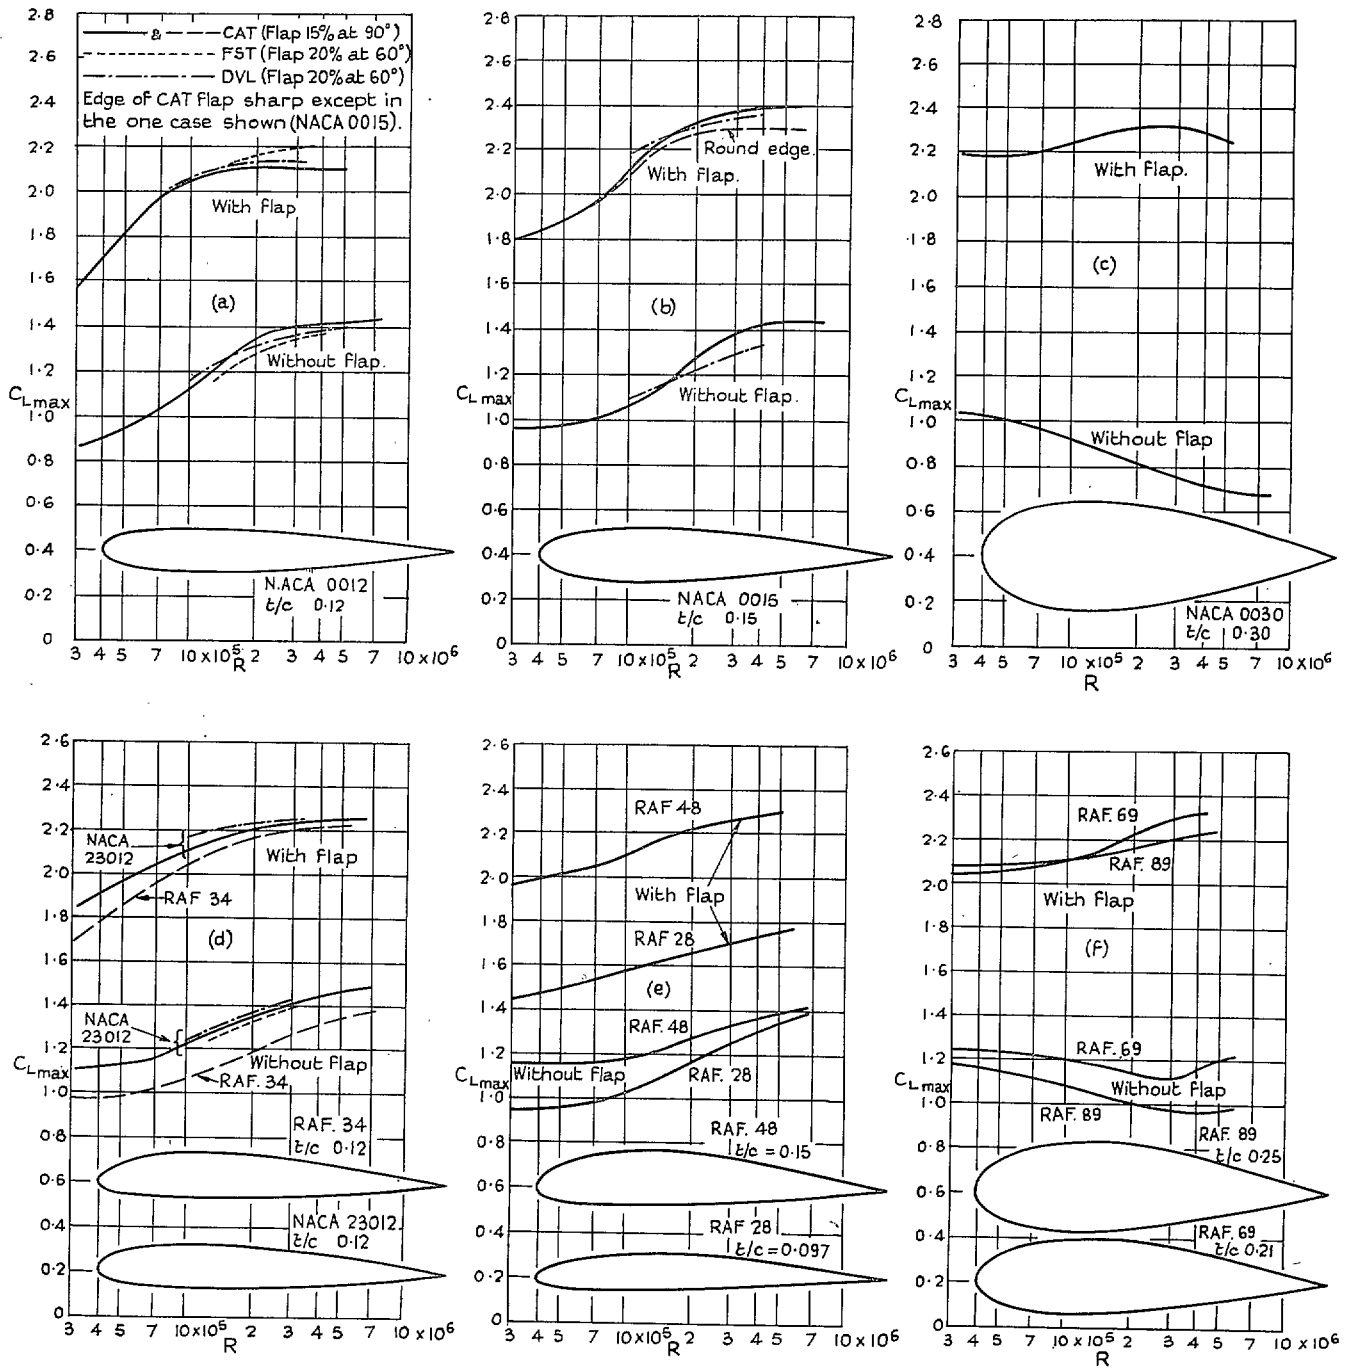


FIG. 3. Variation of $C_{L, \max}$ with R and comparison with other tunnels.

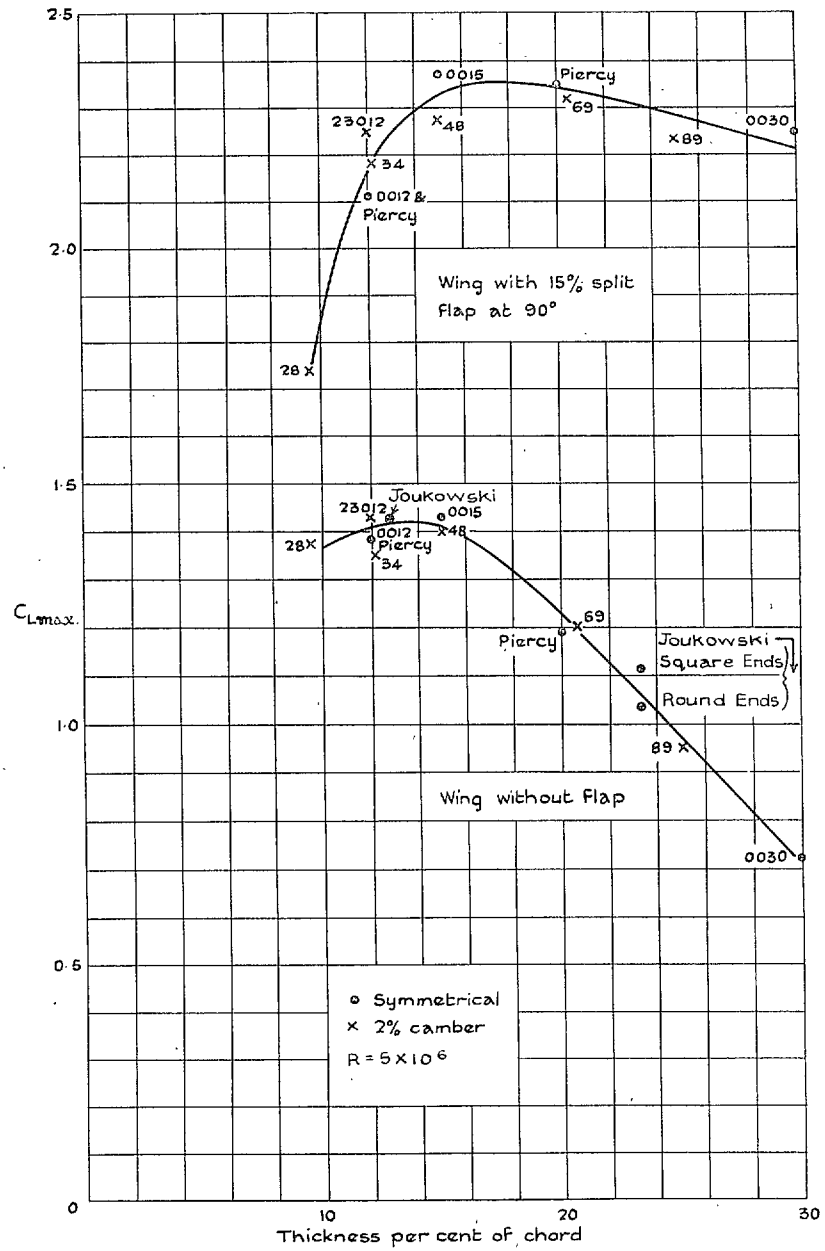


FIG. 4. Variation of maximum lift coefficient with thickness ratio.

Publications of the Aeronautical Research Council

ANNUAL TECHNICAL REPORTS OF THE AERONAUTICAL RESEARCH COUNCIL (BOUND VOLUMES)—

- 1934-35 Vol. I. Aerodynamics. *Out of print.*
Vol. II. Seaplanes, Structures, Engines, Materials, etc. 40s. (40s. 8d.)
- 1935-36 Vol. I. Aerodynamics. 30s. (30s. 7d.)
Vol. II. Structures, Flutter, Engines, Seaplanes, etc. 30s. (30s. 7d.)
- 1936 Vol. I. Aerodynamics General, Performance, Airscrews, Flutter and Spinning.
40s. (40s. 9d.)
Vol. II. Stability and Control, Structures, Seaplanes, Engines, etc. 50s. (50s. 10d.)
- 1937 Vol. I. Aerodynamics General, Performance, Airscrews, Flutter and Spinning.
40s. (40s. 10d.)
Vol. II. Stability and Control, Structures, Seaplanes, Engines, etc. 60s. (61s.)
- 1938 Vol. I. Aerodynamics General, Performance, Airscrews. 50s. (51s.)
Vol. II. Stability and Control, Flutter, Structures, Seaplanes, Wind Tunnels,
Materials. 30s. (30s. 9d.)
- 1939 Vol. I. Aerodynamics General, Performance, Airscrews, Engines. 50s. (50s. 11d.)
Vol. II. Stability and Control, Flutter and Vibration, Instruments, Structures,
Seaplanes, etc. 63s. (64s. 2d.)
- 1940 Aero and Hydrodynamics, Aerofoils, Airscrews, Engines, Flutter, Icing, Stability
and Control, Structures, and a miscellaneous section. 50s. (51s.)

*Certain other reports proper to the 1940 volume will subsequently be
included in a separate volume.*

ANNUAL REPORTS OF THE AERONAUTICAL RESEARCH COUNCIL—

1933-34	1s. 6d. (1s. 8d.)
1934-35	1s. 6d. (1s. 8d.)
April 1, 1935 to December 31, 1936.	4s. (4s. 4d.)
1937	2s. (2s. 2d.)
1938	1s. 6d. (1s. 8d.)
1939-48	3s. (3s. 2d.)

INDEX TO ALL REPORTS AND MEMORANDA PUBLISHED IN THE ANNUAL TECHNICAL REPORTS, AND SEPARATELY—

April, 1950 R. & M. No. 2600. 2s. 6d. (2s. 7½d.)

INDEXES TO THE TECHNICAL REPORTS OF THE AERONAUTICAL RESEARCH COUNCIL—

December 1, 1936 — June 30, 1939.	R. & M. No. 1850.	1s. 3d. (1s. 4½d.)
July 1, 1939 — June 30, 1945.	R. & M. No. 1950.	1s. (1s. 1½d.)
July 1, 1945 — June 30, 1946.	R. & M. No. 2050.	1s. (1s. 1½d.)
July 1, 1946 — December 31, 1946.	R. & M. No. 2150.	1s. 3d. (1s. 4½d.)
January 1, 1947 — June 30, 1947.	R. & M. No. 2250.	1s. 3d. (1s. 4½d.)

Prices in brackets include postage.

Obtainable from

HER MAJESTY'S STATIONERY OFFICE

York House, Kingsway, LONDON, W.C.2 423 Oxford Street, LONDON, W.1
P.O. Box 569, LONDON, S.E.1
13a Castle Street, EDINBURGH, 2 1 St. Andrew's Crescent, CARDIFF
39 King Street, MANCHESTER, 2 Tower Lane, BRISTOL, 1
2 Edmund Street, BIRMINGHAM, 3 80 Chichester Street, BELFAST

or through any bookseller.