

**Environmental Research and Consultancy Department
Civil Aviation Authority**

ERCD REPORT 1301

Noise Exposure Contours for Heathrow Airport 2012

**J Lee
G Cebrian
L Edmonds
J Patel
D Rhodes**

**Environmental Research and Consultancy Department
Civil Aviation Authority**

ERCD REPORT 1301

Noise Exposure Contours for Heathrow Airport 2012

**J Lee
G Cebrian
L Edmonds
J Patel
D Rhodes**

Summary

This report presents the year 2012 noise exposure contours for London Heathrow Airport. The 57 dBA Leq contour area for 2012 based on the actual runway modal split was calculated to be 110.1 km², 1% higher than in 2011. The population enclosed within the actual 57 dBA contour decreased by 2% compared to 2011 to 239,600.

September 2013

The authors of this report are employed by the Civil Aviation Authority. The work reported herein was carried out on behalf of the Department for Transport.

Any views expressed are not necessarily those of the Secretary of State for Transport.

© Crown Copyright 2013. Such copyright is managed through the Department for Transport, under delegation from the Controller of Her Majesty's Stationery Office.

© Civil Aviation Authority.

Population data used in this report are based on 2001 Census data (updated for 2012) supplied by CACI Information Services.

© CACI Ltd 2012 All Rights Reserved.

Contents

Glossary	v
Executive Summary	vii
1 Introduction	1
1.1 Background	1
1.2 Heathrow Airport	2
2 Noise contour modelling methodology	3
2.1 ANCON noise model	3
2.2 Radar data	3
2.3 Flight tracks	3
2.4 Flight profiles	4
2.5 Noise emissions	4
2.6 Traffic distributions	5
2.7 Runway modal splits	7
2.8 Topography	8
2.9 Population and 'Points of Interest' databases	9
3 Noise contour results	10
3.1 Actual modal split contours	10
3.2 Standard modal split contours	11
4 Analysis of results	12
4.1 Actual modal split contours – comparison with 2011 contours	12
4.2 Standard modal split contours – comparison with 2011 contours	13
4.3 Noise contour historical trend	14
5 Conclusions	16
References	17
Tables	18
Table 1 Heathrow 2011 and 2012 average summer day movements by noise class	18
Table 2 Heathrow 2011 and 2012 average summer day movements by ANCON aircraft type	19
Figures	21
Figure 1 Heathrow Airport and the surrounding area	21
Figure 2 Heathrow Airport layout in 2012	22
Figure 3 Heathrow Standard Instrument Departure (SID) routes	23
Figure 4 Typical Heathrow radar flight tracks	24
Figure 5 Heathrow noise class trend 1988-2012	25
Figure 6 Heathrow 2012 average summer day movements by ANCON type	26
Figure 7 Heathrow 2012 and 2011 departure traffic distributions by SID route	27
Figure 8 Heathrow average summer day runway modal splits 1993-2012	28

Figure 9	Topography around Heathrow Airport	29
Figure 10	Population data points around Heathrow	30
Figure 11	Heathrow 2012 actual modal split (89% W / 11% E) Leq contours	31
Figure 12	Heathrow 2012 standard modal split (78% W / 22% E) Leq contours	32
Figure 13	Heathrow 2012 actual (89% W / 11% E) and 2011 actual (83% W / 17% E) Leq contours	33
Figure 14	Heathrow 2012 standard (78% W / 22% E) and 2011 standard (77% W / 23% E) Leq contours	34
Figure 15	Heathrow annual traffic and Leq noise contour area/population trend 1988-2012	35

Glossary

AIP	Aeronautical Information Publication.
ANCON	The UK civil aircraft noise contour model, developed and maintained by ERCD.
ATC	Air Traffic Control.
CAA	Civil Aviation Authority – the UK’s independent specialist aviation regulator.
dB	Decibel units describing sound level or changes of sound level.
dBA	Units of sound level on the A-weighted scale, which incorporates a frequency weighting approximating the characteristics of human hearing.
DfT	Department for Transport (UK Government).
ERCD	Environmental Research and Consultancy Department of the Civil Aviation Authority.
ILS	Instrument Landing System.
Leq	Equivalent sound level of aircraft noise in dBA, often called ‘equivalent continuous sound level’. For conventional historical contours this is based on the daily average movements that take place within the 16-hour period (0700-2300 local time) over the 92-day summer period from 16 June to 15 September inclusive.
NPD	Noise-Power-Distance.
NPR	Noise Preferential Route.
NTK	Noise and Track Keeping monitoring system. The NTK system associates radar data from air traffic control radar with related data from both fixed (permanent) and mobile noise monitors at prescribed positions on the ground.
OS	Ordnance Survey [®] , Great Britain’s national mapping agency.
SEL	The Sound Exposure Level generated by a single aircraft at the measurement point, measured in dBA. This noise metric accounts for the duration of the sound as well as its intensity.
SID	Standard Instrument Departure.

Intentionally blank

Executive Summary

This report presents noise exposure contours generated for London Heathrow Airport for the year 2012. The noise modelling used radar and noise data from the Heathrow Noise and Track Keeping (NTK) System. Mean flight tracks and lateral dispersions for each route, and average flight profiles of aircraft height, speed and thrust for each aircraft type, were calculated using these data.

Analysis of the 2012 summer traffic data for Heathrow revealed that average daily movements (1255.1) decreased by 1% from 2011 (1268.6).

The results showed that the area of the 2012 'actual' modal split (89% west / 11% east) 57 dBA Leq contour increased by 1% to 110.1 km², from 108.8 km² in 2011, despite the 1% fall in traffic. This was caused primarily by the 6% higher proportion of westerly movements in the summer of 2012. The population count within the 2012 actual 57 dBA contour decreased by 1% compared to 2011 to 239,600, as the parts of the contour which expanded did so mainly over relatively unpopulated areas, whilst other parts retracted from highly populated regions.

The area of the 2012 'standard' modal split (78% west / 22% east) 57 dBA Leq contour decreased by 0.4% to 106.7 km² (2011: 107.1 km²), and the corresponding population count was 0.2% lower at 237,350. The standardised contour removes the effect of the increase in westerly mode operations seen in 2012 and indicates that the area of the 'actual' contours would have decreased marginally had the modal split not changed.

Intentionally blank

1 Introduction

1.1 Background

- 1.1.1 Each year the Environmental Research and Consultancy Department (ERCD) of the Civil Aviation Authority (CAA) calculates the noise exposure around London Heathrow Airport on behalf of the Department for Transport (DfT). A computer model, ANCON, validated with noise measurements, is used to estimate the noise exposure. The model calculates the emission and propagation of noise from arriving and departing air traffic.
- 1.1.2 The noise exposure metric used is the Equivalent Continuous Sound Level, or Leq 16-hour (0700-2300 local time), which is calculated over the 92-day summer period from 16 June to 15 September. The background to the use of this index is explained in DORA Report 9023 (**Ref 1**).
- 1.1.3 Noise exposure is depicted in the form of noise contours, i.e. lines joining places of constant Leq, akin to the height contours shown on geographical maps or isobars on a weather chart. In the UK, Leq noise contours are normally plotted at levels from 57 to 72 dBA, in 3 dB steps.¹ The 57 dBA level denotes the approximate onset of significant community annoyance.
- 1.1.4 This report contains small-scale diagrams of the year 2012 Heathrow Leq contours overlaid onto Ordnance Survey[®] (OS) base maps. Diagrams in Adobe[®] PDF and AutoCAD DXF format are also available for download from the DfT website².
- 1.1.5 The objectives of this report are to explain the noise modelling methodology used to produce the year 2012 Leq contours for Heathrow Airport, to present the calculated noise contours and to assess the changes to the contours relative to the previous year (**Ref 2**).

¹ Aircraft noise contours are also produced on behalf of airports for the specific purpose of meeting the requirements of the Environmental Noise (England) Regulations 2006, which implemented Directive 2002/49/EC, Assessment and Management of Environmental Noise, in England. These are based on annual average values and require the use of different parameters (L_{day} , $L_{evening}$, L_{night} , $L_{eq,16hr}$ and L_{den} at 5 dB steps), so it is not possible to draw meaningful conclusions between the two types of contour maps. Further details about Directive 2002/49/EC are available on the Department for Environment, Food and Rural Affairs website at www.gov.uk/defra as well as ERCD Reports 1204, 1205 and 1206 (available from www.caa.co.uk), which cover Heathrow, Gatwick and Stansted 2011 noise mapping respectively.

² www.gov.uk/dft

1.2 Heathrow Airport

- 1.2.1 Heathrow Airport is situated approximately 13 miles (21 km) west of the city of London. It is surrounded by suburban housing, business premises and mixed-use open land to the north and south, suburban housing and business premises to the east, and several large reservoirs, mixed-use open land, housing and business premises to the west (**Figure 1**).
- 1.2.2 Heathrow Airport has two runways: Runway 09L/27R to the north, which is 3,901 m long, and Runway 09R/27L to the south, which is 3,660 m long. The landing threshold³ for Runway 09L is displaced by 306 m. The landing threshold for Runway 09R is also displaced, by 307 m. There are currently four passenger terminals.⁴ The layout of the runways, taxiways and passenger terminals in 2012 is shown in **Figure 2**.⁵
- 1.2.3 In the 2012 calendar year, there were 475,000 aircraft movements (2011: 481,000) at Heathrow Airport, handling approximately 70.0 million passengers (2011: 69.4 million).⁶

³ The runway threshold marks the beginning of the runway available for landing aircraft. A *displaced* threshold is a runway threshold that is not located at the physical end of the runway. A displaced threshold is often employed to give arriving aircraft sufficient clearance over an obstacle.

⁴ Terminal 2 closed for rebuilding work in November 2009 and is expected to re-open in 2014.

⁵ UK AIP (31 May 12) AD 2-EGLL-2-1

⁶ Source: Civil Aviation Authority (www.caa.co.uk/airportstatistics)

2 Noise contour modelling methodology

2.1 ANCON noise model

2.1.1 Leq noise contours were calculated with the UK civil aircraft noise model ANCON (version 2.3), which is developed and maintained by ERCD on behalf of the DfT. A technical description of ANCON is provided in R&D Report 9842 (**Ref 3**). The ANCON model is also used for the production of annual contours for Gatwick and Stansted airports, and a number of other UK airports.

2.1.2 ANCON is fully compliant with the latest European guidance on noise modelling, ECAC/CEAC Doc 29 (3rd edition), published in December 2005 (**Ref 4**). This guidance document represents internationally agreed best practice as implemented in modern aircraft noise models.

2.2 Radar data

2.2.1 The noise modelling carried out by ERCD made extensive use of radar data extracted from Heathrow Airport's Noise and Track Keeping (NTK) system. Most large airports have NTK systems, which take data from Air Traffic Control (ATC) radars and combine them with flight information such as call sign, tail number, type and destination. Analyses of departure and arrival flight tracks, and flight profiles, were based on Heathrow 2012 summer radar data.

2.3 Flight tracks

2.3.1 Aircraft departing Heathrow are required to follow specific flight paths called Noise Preferential Routes (NPRs) unless directed otherwise by ATC. NPRs were designed to avoid the overflight of built-up areas where possible. They establish a path from the take-off runway to the main UK air traffic routes and form the first part of the Standard Instrument Departure routes (SIDs). The Heathrow SIDs are illustrated in **Figure 3**.

2.3.2 Associated with each NPR is a lateral swathe, which is defined by a pair of lines that diverge at 10 degrees from a point 2,000 m from start-of-roll, leading to a corridor extending 1.5 km either side of the nominal NPR centreline. Within this swathe the aircraft are considered to be flying on-track. The swathe takes account of various factors that affect track-keeping, including tolerances in navigational equipment, type and weight of aircraft, and weather conditions – particularly winds that may cause drifting when aircraft are turning. Aircraft reaching an altitude of 4,000 ft at any point along an NPR may be turned off the route by ATC onto more direct headings to their destinations – a practice known as 'vectoring'. ATC may

also vector aircraft from NPRs below this altitude for safety reasons, including in certain weather conditions (for example, to avoid storms).

- 2.3.3 Departure and arrival flight tracks were modelled using samples of radar data extracted from the Heathrow NTK system over the 92-day summer period, 16 June to 15 September 2012. **Figure 4** shows a sample of radar flight tracks from a day in August 2012. ERCD used in-house radar analysis software to calculate mean departure flight tracks and associated lateral dispersions for each NPR/SID. Arrival tracks for Runways 27L, 27R, 09L and 09R were modelled using evenly spaced 'spurs' about the extended runway centrelines. The majority of arriving aircraft joined the centrelines at distances between 14 and 34 km from threshold when in westerly mode, and at distances between 11 and 32 km in easterly mode.

2.4 Flight profiles

- 2.4.1 For each ANCON aircraft type, average flight profiles of height, speed and thrust versus track distance (for departures and arrivals separately) were reviewed and updated where necessary, using 2012 summer radar data. The engine power settings required for the aircraft to follow the average height and speed profiles were calculated from data describing aircraft performance characteristics within each of the different aircraft type categories.
- 2.4.2 The application of reverse thrust following touchdown was modelled for all ANCON types where applicable.

2.5 Noise emissions

- 2.5.1 At Heathrow, the NTK system captures data from both fixed and mobile noise monitors around the airport. Noise event data for individual aircraft operations are then matched to operational data provided by the airport. The Heathrow NTK system comprises 12 fixed monitors (positioned approximately 6.5 km from start-of-roll), together with a number of mobile monitors that can be deployed anywhere within the NTK radar coverage area.⁷
- 2.5.2 The noise data collected are screened by ERCD with reference to several criteria so that only high quality data are used in the analysis. First of all, noise data that lie outside a 'weather window' are discarded. This ensures that the data used are not affected by adverse meteorological conditions such as precipitation and strong winds. Secondly, the maximum noise level of the aircraft event must exceed the noise monitor threshold by at least 10 dB to avoid underestimates of the Sound

⁷ Further information on the noise monitors can be found in ERCD Report 1004 (**Ref 5**).

Exposure Level (SEL).⁸ Thirdly, only measurements obtained of aircraft operations that pass through a 60-degree inverted cone, centred at the noise monitor, are retained in order to minimise the effects of lateral attenuation⁹ and lateral directivity¹⁰.

- 2.5.3 The ANCON model calculates aircraft noise using a noise database expressing SEL as a function of engine power setting and slant distance to the receiver – the so-called ‘Noise-Power-Distance’ (NPD) relationship. The ANCON noise database is continually reviewed and updated with adjustments made when, and where, measurements show this to be necessary.

2.6 Traffic distributions

- 2.6.1 The Leq contours are based on the daily average movements that take place during the 16-hour day (0700-2300 local time) over the 92-day period from 16 June to 15 September inclusive. The source of this information is the NTK system, which stores radar data supplemented by daily flight plans. Traffic statistics from NTK data were cross-checked with runway logs supplied by NATS¹¹ and close agreement was found.

Traffic distribution by noise class

- 2.6.2 **Table 1** lists the average summer day movements¹² by eight noise classes of aircraft, ranked in ascending order of noise emission, i.e. from least to most noisy, in 2011 and 2012. As in 2011, short-haul ‘Chapter 3’ and ‘Chapter 4’¹³ jet aircraft (Noise Class 3) formed the highest proportion of movements (67%), though their numbers were slightly lower (by 2%) compared to 2011. (Note: in 2012 an estimated 96% of the aircraft within Noise Class 3 were compliant with the Chapter 4 standard).
- 2.6.3 The numbers of wide-body twin-engine aircraft (Noise Class 4), which comprised 22% of the total traffic, were 3% higher in 2012. There was a 4% decrease in movements within Noise Class 5 (i.e. second generation wide-body 3/4-engine

⁸ The Sound Exposure Level of an aircraft noise event is the steady noise level, which over a period of *one second* contains the same sound energy as the whole event. It is equivalent to the Leq of the noise event normalised to one second.

⁹ Lateral attenuation is the excess sound attenuation caused by the ground surface, which can be significant at low angles of elevation.

¹⁰ Lateral directivity is the non-uniform directionality of sound radiated laterally about the roll axis of the aircraft – this is influenced to a large extent by the positioning of the engines.

¹¹ NATS is the provider of air traffic control services to Heathrow Airport.

¹² Includes departures and arrivals.

¹³ Aircraft whose certificated noise levels are classified by the ICAO *Standards and Recommended Practices – Aircraft Noise: Annex 16 to the Convention on International Civil Aviation* into ‘Chapter 3’ and ‘Chapter 4’ types - these are typically characterised by modern, quieter, high-bypass turbofan aircraft.

aircraft) in 2012. The numbers of aircraft in Noise Classes 2, 6 and 8 were insignificant, and there were no aircraft within Noise Classes 1 and 7.

- 2.6.4 The average number of daily movements at Heathrow over the 2012 summer period (1255.1) was 1% lower than in 2011 (1268.6).
- 2.6.5 **Figure 5** illustrates the changing distribution of traffic among the eight noise classes over the period 1988 to 2012 inclusive. The shift towards Chapter 3 & 4 aircraft (i.e. Noise Classes 3 to 5) over the years can be seen, with short-haul jet aircraft (Noise Class 3) dominating the fleet mix.

Traffic distribution by ANCON aircraft type

- 2.6.6 A more detailed breakdown of the 2012 average summer day movements, indicating the ANCON types that fall into each noise class, is provided in **Table 2**.
- 2.6.7 The largest increases were within Noise Class 3 for the EA319C, which were up by 18 daily movements, and the EA320V, up by 10 movements (note: ANCON type descriptions can be found in **Table 2**). However these increases were offset by reductions for the EA321V (down by 12 movements) and the EA320C (down by 11 movements).
- 2.6.8 Within Noise Class 4, there were movement increases for the ANCON types B773G, B772R, EA33 and B763G, partially offset by reductions in the numbers of B773R, EA31 and B763P aircraft.
- 2.6.9 There were some notable decreases in Noise Class 5 for the EA34, B744G and B744P, which were partially offset by increases in types such as the EA38GP, EA38R and B744R. Overall there were on average four fewer movements each day by the B747-400 aircraft family.
- 2.6.10 **Figure 6** illustrates the numbers of movements by ANCON aircraft type for the 2012 average summer day. It may be seen that the Airbus A319/A320/A321 aircraft family dominates the movements at Heathrow. In particular, the EA319V and EA320V are the most frequent aircraft types, both with 210 daily movements, followed by the EA320C with 107 movements each day.
- 2.6.11 On average there were 64 daily movements of the B744R ANCON type, the noise dominant aircraft at Heathrow in terms of departure noise. This aircraft contributed the highest level of departure 'noise energy', which is a function of both aircraft noise level and movement numbers. Arrival noise was dominated by the short-haul Airbus aircraft family (e.g. EA320V, EA319V and EA320C).

Traffic distribution by SID route

- 2.6.12 **Figure 7** shows the distribution of aircraft departures by SID route for 2012. The percentage loadings on the SIDs were similar to 2011, with the westerly WOB/BPK SIDs taking the highest proportion of traffic over the summer period

(34%), followed by the westerly DVR/DET SIDs (22%). The largest increase (+3%) was found on the westerly CPT/SAM SIDs, while the highest reduction (-3%) was seen on the easterly BUZ/BPK SIDs.

2.7 Runway modal splits

2.7.1 In general, aircraft will take-off and land into a headwind to maximise lift during take-off and landing. The wind direction, which varies over the course of a year, will therefore have an important influence on the usage of runways¹⁴. The ratio of westerly (27L/27R) and easterly (09L/09R) operations is referred to as the *runway modal split*.

2.7.2 To remove the effect of year-on-year weather fluctuations on aircraft operations and to clarify underlying trends, two sets of contours have been produced for the year 2012:

- (i) Contours using the 'actual' modal split over the Leq period; and
- (ii) Contours assuming the 'standard' modal split over the Leq period, i.e. the long-term modal split calculated from the 20-year rolling average; for 2012, this is the 20-year period from 1993 to 2012. Use of the standard modal split enables year-on-year comparisons without the runway usage affecting the contour shape.

2.7.3 The actual and standard modal splits for 2012, together with the previous year, are summarised in the following table:

Heathrow runway modal splits for 2012 and 2011

Modal split scenario	% west (Runway 27L/27R)	% east (Runway 09L/09R)
Actual 2012	89%	11%
Actual 2011	83%	17%
Standard 2012	78%	22%
Standard 2011	77%	23%

2.7.4 The proportion of westerly movements in 2012 (89%) was 6% higher than in 2011, and the highest at Heathrow since 1998. The standard modal split for 2012 had 1% more westerly operations. Historical runway modal splits at Heathrow for the past 20 years are illustrated in **Figure 8**.

¹⁴ It should be noted that at Heathrow, a 'westerly preference' for aircraft operations is employed, which means that the airport will operate in westerly mode even if there is a light tailwind. This is done to reduce the use of easterly SIDs, which tend to overfly more populated areas compared to the westerly SIDs.

- 2.7.5 At Heathrow, the runway modal split can have an important influence on the area of the 57 dBA Leq contour. In theory, the 57 dBA contour area would be maximised if (all other things being equal) the airport operated solely in westerly mode over the whole summer period. With a decreasing proportion of westerly movements (and hence an increasing proportion of easterly movements), the 57 dBA contour area would become smaller, reaching a theoretical minimum at a runway modal split of around 40% west / 60% east.
- 2.7.6 The effect of modal split on the contour area appears to be due to two factors: firstly, the interaction between the noise generated from the two separate runways at Heathrow, and secondly, operations in accordance with the 'Cranford Agreement'¹⁵, which places a restriction on departures from Runway 09L when the airport is operating in easterly mode.
- 2.7.7 Higher proportions of easterly movements at Heathrow would, in theory, help to reduce the 57 dBA contour area. It should, however, be noted that if the proportion of easterly movements were to rise above about 40%, the population count within the 57 dBA contour would start to increase sharply because of the relatively densely populated areas located to the east of the airport.

2.8 Topography

- 2.8.1 The topography around Heathrow Airport was modelled by accounting for terrain height. This was achieved by geometrical corrections for source-receiver distance and elevation angles. Other, more complex effects, such as lateral attenuation from uneven ground surfaces and noise screening/reflection effects due to topographical features, were not taken into account.
- 2.8.2 ERCD holds OS terrain height data¹⁶ on a 200 m by 200 m grid for the whole of England. Interpolation was performed to generate height data at each of the calculation points on the receiver grid used by the ANCON noise model. The terrain heights in the vicinity of Heathrow Airport are depicted diagrammatically in **Figure 9**.

¹⁵ The 'Cranford Agreement' was a Government undertaking given at a meeting of the Cranford Residents' and District Amenities Association in 1952, that as far as practicable, the northern runway would not be used for take-offs to the east due to the proximity of Cranford to the east end of the runway. Following public consultation, a decision was made in 2009 by the Government to end the Cranford Agreement. This would allow for the more even spreading of noise around Heathrow. However, new taxiways would need to be built in order to implement the full alternation of easterly operations. The airport operator is expected to make a decision on applying for planning permission from the London Borough of Hillingdon for these works following completion of the 'Operational Freedoms' trial, which permits more flexible use of the runways in certain circumstances that can be applied to anticipate, prevent and mitigate disruption.

¹⁶ Meridian™ 2

2.9 Population and 'Points of Interest' databases

- 2.9.1 Estimates were made of the numbers of people and households enclosed within the noise contours. The population data used in this report are a 2012 update of the 2001 Census supplied by CACI Limited¹⁷. The CACI population database contains data referenced at the postcode level. Population and household numbers associated with each postcode are assigned to a single co-ordinate located at the postcode's centroid. The population data points for the area around Heathrow Airport are illustrated in **Figure 10**.
- 2.9.2 Estimates have also been made of the numbers of noise sensitive buildings situated within the contours, using the *InterestMap*^{TM18} 'Points of Interest' (2012) database. For the purposes of this study, the noise sensitive buildings that have been considered are schools, hospitals and places of worship.

¹⁷ www.caci.co.uk

¹⁸ InterestMap is distributed by Dotted Eyes Ltd and derived from Ordnance Survey 'Points of Interest' data.

3 Noise contour results

3.1 Actual modal split contours

3.1.1 The Heathrow 2012 Leq noise contours generated with the actual 2012 summer period runway modal split (89% west / 11% east) are shown in **Figure 11**. The contours are plotted from 57 to 72 dBA at 3 dB intervals.

3.1.2 The cumulative areas, populations and households within the actual modal split contours are provided in the table below:

Heathrow 2012 actual modal split contours: area, population and household estimates

Leq contour level (dBA)	Area (km ²)	Population	Households
> 57	110.1	239,600	99,850
> 60	60.4	103,500	41,050
> 63	34.3	42,400	16,700
> 66	20.7	13,750	5,150
> 69	10.3	3,600	1,450
> 72	5.4	200	100

Note: Populations and households are given to the nearest 50.

3.1.3 Estimates of the cumulative numbers of noise sensitive buildings within the actual modal split contours are provided in the table below:

Heathrow 2012 actual modal split contours: noise sensitive building estimates

Leq contour level (dBA)	Schools	Hospitals	Places of worship
> 57	161	5	113
> 60	59	0	46
> 63	13	0	17
> 66	5	0	4
> 69	1	0	1
> 72	0	0	0

3.2 Standard modal split contours

- 3.2.1 The Heathrow 2012 Leq noise contours generated with the standard 2012 summer period runway modal split (78% west / 22% east) are shown in **Figure 12**. The contours are plotted from 57 to 72 dBA at 3 dB intervals.
- 3.2.2 The cumulative areas, populations and households within the standard modal split contours are provided in the table below:

Heathrow 2012 standard modal split contours: area, population and household estimates

Leq contour level (dBA)	Area (km²)	Population	Households
> 57	106.7	237,350	98,600
> 60	58.7	105,800	42,150
> 63	34.3	42,000	16,500
> 66	20.5	12,850	4,850
> 69	10.0	3,200	1,200
> 72	5.3	200	100

Note: Populations and households are given to the nearest 50.

- 3.2.3 Estimates of the cumulative numbers of noise sensitive buildings within the standard modal split contours are provided in the table below:

Heathrow 2012 standard modal split contours: noise sensitive building estimates

Leq contour level (dBA)	Schools	Hospitals	Places of worship
> 57	150	6	110
> 60	57	0	43
> 63	12	0	16
> 66	5	0	4
> 69	1	0	1
> 72	0	0	0

4 Analysis of results

4.1 Actual modal split contours – comparison with 2011 contours

4.1.1 The Heathrow 2012 actual modal split Leq contours are compared against the 2011 actual Leq contours in **Figure 13**. The table below summarises the areas, populations and percentage changes from 2011 to 2012:

Heathrow actual modal split contours: areas and populations for 2011 and 2012

Leq (dBA)	2011 Area (km ²)	2012 Area (km ²)	Area change (%)	2011 Pop.	2012 Pop.	Pop. change (%)
> 57	108.8	110.1	+1%	243,350	239,600	-2%
> 60	58.9	60.4	+3%	101,150	103,500	+2%
> 63	33.9	34.3	+1%	41,900	42,400	+1%
> 66	20.3	20.7	+2%	13,050	13,750	+5%
> 69	10.0	10.3	+3%	3,250	3,600	+11%
> 72	5.4	5.4	0%	250	200	-20%

Note: The 2011 and 2012 modal splits were 83% west / 17% east and 89% west / 11% east respectively.

- 4.1.2 The 57 dBA contour lobe formed by aircraft on the WOB/BPK SIDs to the north-west of the airport retracted noticeably in 2012 - this can be attributed to the 15% reduction in movements of the noise dominant B744-400 aircraft on these SIDs in 2012 compared to 2011. This outweighed the effect of the 6% higher proportion of westerly movements in 2012.
- 4.1.3 In contrast, the CPT/SAM SIDs 57 dBA contour lobe to the west showed an obvious extension in 2012, a consequence of the 25% increase in movements by the B747-400 aircraft family and the 20% higher movement numbers overall on these routes.
- 4.1.4 The westerly DVR/DET SIDs 57 dBA contour lobe turning to the south was unchanged as the effects of the higher westerly modal split were offset by a 21% reduction in movements by B744-400 aircraft on these SIDs.
- 4.1.5 The two smaller 57 dBA contour lobes to the east of the airport associated with easterly departing aircraft turning to the north (on the BUZ/BPK SIDs) and turning south (on the CPT/SAM/DVR/MID SIDs) were somewhat smaller in 2012, the lower proportion of easterly departures in 2012 having a significant effect.
- 4.1.6 It can be seen that the eastern end of the 57 dBA contour has extended, clearly showing the impact of the higher proportion of westerly arrivals in 2012.

- 4.1.7 Relative to 2011, the areas of most of the 2012 contours have increased, by up to 3%. This can be attributed to the 6% higher proportion of westerly movements in 2012, the effects of which outweighed the 1% decrease in total movements, which included four fewer movements overall by the noise dominant B747-400 aircraft. Higher proportions of westerly movements result in larger contour areas at Heathrow, as explained in section 2.7.5.
- 4.1.8 The 2012 population count at the 57 dBA contour level decreased because the areas over which the contour expanded were largely unpopulated (e.g. Barnes Common and Windsor Forest), whilst the parts of the contour which retracted did so over highly populated areas such as Cippenham (in Slough) and Twickenham. The populations within the higher contour levels generally increased. It should be noted that percentage changes in contour areas are not necessarily accompanied by similar changes in enclosed population because of the uneven distribution of populations around the airport.

4.2 Standard modal split contours – comparison with 2011 contours

- 4.2.1 The Heathrow 2012 standard modal split Leq contours are compared against the 2011 standard Leq contours in **Figure 14**. The following table summarises the areas, populations and percentage changes from 2011 to 2012:

Heathrow standard modal split contours: areas and populations for 2011 and 2012

Leq (dBA)	2011 Area (km ²)	2012 Area (km ²)	Area change (%)	2011 Pop.	2012 Pop.	Pop. change (%)
> 57	107.1	106.7	-0.4%	237,750	237,350	-0.2%
> 60	58.0	58.7	+1%	101,050	105,800	+5%
> 63	34.1	34.3	+1%	42,800	42,000	-2%
> 66	20.2	20.5	+1%	12,750	12,850	+1%
> 69	9.9	10.0	+1%	3,100	3,200	+3%
> 72	5.3	5.3	0%	300	200	-33%

Note: The 2011 and 2012 standard modal splits were 77% west / 23% east and 78% west / 22% east respectively.

- 4.2.2 The smaller WOB/BPK SIDs 57 dBA contour lobe to the north-west of the airport for 2012 shows the effect of the lower movement numbers on these routes, in particular the reduction in B744-400 aircraft.
- 4.2.3 In contrast the CPT/SAM SIDs 57 dBA contour lobe has expanded in 2012 as a result of higher aircraft numbers on these SIDs (which included a significant increase in B744-400 departures).
- 4.2.4 With the effect of the modal split change removed, the eastern end of the standard 57 dBA contour shows little difference between 2011 and 2012.

- 4.2.5 The 2012 57 dBA contour area was 0.4% smaller compared to 2011, reflecting the 1% fewer movements in 2012. At the higher contour levels, areas increased slightly by up to 1%. There was no consistent pattern to the corresponding population changes.
- 4.2.6 The standardised contours normally provide a clearer indication than the actual contours of 'fleet noise level' changes from year to year because they minimise the effect of any difference between the ratios of westerly to easterly operations. The 57 dBA standard contour results indicate that the actual modal split contour would have been marginally smaller had there not been the significant increase in westerly mode operations in 2012.
- 4.2.7 It can be seen from the results for the actual and standard contours that the runway modal split affects the area enclosed by the contours (as explained in section 2.7.5). The 57 dBA Leq actual 2012 contour (modal split 89% west / 11% east) encloses an area of 110.1 km², whereas the 57 dBA Leq standard 2012 contour (modal split 78% west / 22% east) has a 3% smaller area at 106.7 km².

4.3 Noise contour historical trend

- 4.3.1 **Figure 15** shows how the 57 dBA Leq actual modal split contour has changed in area and population terms since 1988 by comparison with the total annual (365-day) aircraft movements. (Actual modal split data are used in this figure because standard modal split contours were not produced prior to 1995.)

Movements

- 4.3.2 Against the trend of a general decrease in contour area, the number of aircraft movements has risen steadily most years up until 2007, with a major trough occurring in 1991, the year of the First Gulf War. The annual movement figure for 2001 was slightly lower than the preceding year and reflected the disruption to traffic following the terrorist attacks on 11 September 2001. The total annual movement figure for 2005 was 2% higher than that for 2004 compared with the 1% decrease for the 16-hour average summer Leq day. Movements during the summer 2005 period were affected by three days of industrial action in August and possibly by the terrorist attacks in central London on 7 July 2005. A separate analysis showed that total movements in July and August of 2005 were less than those for the same months in 2004.
- 4.3.3 The total annual movements in 2006 were 0.2% lower than in 2005. Traffic levels during the summer 2006 Leq period were affected by new tighter security restrictions, which were introduced in mid-August 2006. Flights at Heathrow were also disrupted in December 2006 by heavy fog.
- 4.3.4 Annual traffic levels rose by 1% in 2007, but fell in 2008 by 0.6% – this may be attributed to the economic downturn and fluctuating oil price. (Note: over the summer period only, traffic levels increased by 0.5%). In 2009, traffic levels

dropped further, by 3%, as the global recession continued to impact upon the aviation industry.

- 4.3.5 Aircraft movements fell in 2010 for the third year in a row, this time by 2%, as a result of adverse winter weather conditions, the volcanic ash crisis in April and industrial action in May. (However, it should be noted that over the summer period only, movements were up by 3%).
- 4.3.6 Annual traffic levels in 2011 staged a marked recovery from the falls seen in the previous three years, with an increase of 6% back to a level close to the last peak seen in 2007. Traffic levels dropped back slightly in 2012, by 1%.

Areas and populations

- 4.3.7 The contour area figures give a better indication of the actual noise than the population figures because the latter are more susceptible to the runway modal split. This is particularly noticeable in 1995, which had an atypical modal split of 54% west / 46% east (compared with the 20-year average of 77% west / 23% east for that year). Also, percentage changes in contour areas are not necessarily accompanied by similar changes in enclosed population because the contours may be different in shape as well as size, and movement of contour lines from year to year, especially in or around relatively highly populated areas, can cause a disproportionate change in enclosed population. The recorded increase in enclosed population between 1998 and 1999 reflected demographic changes that occurred between the 1991 Census and the subsequent update.
- 4.3.8 The sharp rate of decline in contour area recorded in the late eighties and early nineties has diminished. The area reductions in 2000 and 2001 reflect reduced numbers of Concorde movements in those years (2.5 per day in 2000 and 0.1 per day in 2001). This followed the grounding of Concorde after the crash at Paris, Charles de Gaulle airport in July 2000. Concorde movements in 2002 and 2003 never reached the level of 1999. The dashed line on the figure shows what the 2003 areas and populations would have been had there been no movements by Concorde in the Leq period for that year. In October 2003 Concorde was retired from service so there were no movements by Concorde in 2004.
- 4.3.9 From 2004 to 2008, the 57 dBA contour area at Heathrow was relatively steady, within a range from 117 to 123 km². However, in 2009 the contour area fell below this range to 112.5 km², and dropped even further in 2010 to 108.3 km², the smallest area ever calculated for Heathrow. The 2011 area saw a marginal increase to 108.8 km² as traffic levels rose slightly over the summer period. The area in 2012 increased slightly to 110.1 km², caused mainly by a significant increase in the proportion of westerly mode operations.
- 4.3.10 Between 2001 and 2009 the population count within the 57 dBA contour fluctuated between approximately 240,000 and 269,000. In 2010, the population count dropped below this range to its lowest ever value of 229,000. In line with the increase in contour area, the population increased to 243,000 in 2011, before dropping by 2% to 239,600 in 2012.

5 Conclusions

- 5.1 Year 2012 average summer 16-hour day Leq noise exposure contours have been generated for Heathrow Airport using the ANCON noise model.
- 5.2 The results show that the actual modal split 57 dBA Leq contour area increased by 1% to 110.1 km² in 2012 (2011: 108.8 km²). This can be attributed mainly to the significant increase in proportion of westerly movements in 2012, which outweighed the effects of a 1% reduction in traffic. The population count within the 2012 actual 57 dBA Leq contour decreased by 2% compared to 2011 to 239,600, as parts of the contour expanded over mainly woodland and parkland areas and other parts retreated from populated regions.
- 5.3 The standard modal split 57 dBA Leq contour area decreased by 0.4%, from 107.1 km² in 2011 to 106.7 km² in 2012. The population count within the 2012 standard 57 dBA Leq contour was also slightly lower, by 0.2%, at 237,350.

References

- 1 Critchley J B, Ollerhead J B
The Use of Leq as an Aircraft Noise Index
DORA Report 9023, September 1990
- 2 Lee J, Edmonds L, Patel J, Rhodes D
Noise Exposure Contours for Heathrow Airport 2011
ERCD Report 1201, September 2012
- 3 Ollerhead J B, Rhodes D P, Viinikainen M S, Monkman D J, Woodley A C
*The UK Civil Aircraft Noise Contour Model ANCON:
Improvements in Version 2*
R&D Report 9842, July 1999
- 4 European Civil Aviation Conference
Report on Standard Method of Computing Noise Contours around Civil Airports
ECAC.CEAC Doc 29, 3rd edition, Volumes 1 & 2, December 2005
- 5 White S, Beaton D
Noise Monitor Positions at Heathrow, Gatwick and Stansted Airports
ERCD Report 1004 (3rd edition), June 2012

Table 1 Heathrow 2011 and 2012 average summer day movements by noise class

Noise Class	Description	2011	2012	Percentage of total 2012 movements	Change
PROPELLER AIRCRAFT					
1	Small propeller aircraft	0.1	0.0	0%	-0.1 (*)
2	Large propeller aircraft	1.6	0.2	0%	-1.4 (*)
CHAPTER 3/4 JETS **					
3	Short-haul aircraft	855.9	840.9	67%	-15.0 (-2%)
4	Wide-body twin-engine aircraft	268.3	277.3	22%	+9.0 (+3%)
5	2 nd generation wide-body 3,4-engine aircraft	142.7	136.5	11%	-6.2 (-4%)
LARGE CHAPTER 2/3 JETS					
6	1 st generation wide-body 3,4-engine aircraft	< 0.1	< 0.1	0%	0.0 (*)
2nd GENERATION TWIN JETS					
7	Narrow-body twin-engine aircraft (including Ch.2 and hushkitted versions)	0.0	0.0	0%	0.0 (*)
1st GENERATION JETS					
8	Narrow-body 3,4-engine aircraft	0.1	0.1	0%	0.0 (*)
	TOTAL	1268.6	1255.1	100%	-13.5 (-1%)

* Percentage changes not shown due to low numbers and limited data resolution.

** An estimated 96% of Noise Class 3 aircraft in 2012 meet the 'Chapter 4' noise standard (2011: 94%).


Note: Totals may not sum exactly due to rounding.


Table 2 Heathrow 2011 and 2012 average summer day movements by ANCON aircraft type

Aircraft type	Noise class	ANCON type	2011	2012	Change
Small twin-piston propeller	1	STP	< 0.1	0.0	0.0
Small twin-turboprop	1	STT	0.1	0.0	-0.1
Large twin-turboprop	2	LTT	1.6	0.2	-1.4
Large four-engine propeller	2	L4P	< 0.1	0.0	0.0
Boeing 717	3	B717	3.7	0.0	-3.7
Boeing 737-300/400/500	3	B733	20.4	17.7	-2.7
Boeing 737-600/700	3	B736	21.1	22.1	+1.0
Boeing 737-800/900	3	B738	23.9	25.4	+1.5
Boeing 757-200 (RB211-535C engines)	3	B757C	1.1	1.4	+0.3
Boeing 757-200 (RB211-535E4/E4B engines)	3	B757E	17.6	19.4	+1.8
Boeing 757-200 (PW2037/2040 engines)	3	B757P	2.3	0.3	-2.0
Boeing 757-300	3	B753	0.7	0.7	0.0
BAe 146/Avro RJ	3	BA46	6.6	6.5	-0.1
Airbus A318	3	EA318	2.5	5.6	+3.1
Airbus A319 (CFM-56 engines)	3	EA319C	32.9	50.5	+17.6
Airbus A319 (IAE-V2500 engines)	3	EA319V	208.2	210.3	+2.1
Airbus A320 (CFM-56 engines)	3	EA320C	117.7	107.0	-10.7
Airbus A320 (IAE-V2500 engines)	3	EA320V	199.4	209.6	+10.2
Airbus A321 (CFM56 engines)	3	EA321C	41.1	34.5	-6.6
Airbus A321 (IAE-V2500 engines)	3	EA321V	102.1	89.7	-12.4
Executive Business Jet (Chapter 3)	3	EXE3	4.2	1.8	-2.4
Bombardier Regional Jet 100/200	3	CRJ	0.2	< 0.1	-0.2
Bombardier Regional Jet 700	3	CRJ700	0.7	0.0	-0.7
Bombardier Regional Jet 900	3	CRJ900	2.9	1.1	-1.8
Embraer ERJ 135/145	3	ERJ	28.6	25.4	-3.2
Embraer ERJ 170	3	ERJ170	0.3	< 0.1	-0.3
Embraer ERJ 190	3	ERJ190	1.0	3.5	+2.5
Fokker 100	3	FK10	8.5	4.0	-4.5
McDonnell Douglas MD80 series	3	MD80	8.2	4.5	-3.7
Boeing 767-200	4	B762	0.2	0.2	0.0
Boeing 767-300 (GE CF6-80 engines)	4	B763G	13.3	15.5	+2.2
Boeing 767-300 (PW4000 engines)	4	B763P	12.5	11.2	-1.3
Boeing 767-300 (RR RB211 engines)	4	B763R	41.6	40.9	-0.7
Boeing 767-400	4	B764	16.3	16.4	+0.1
Boeing 777-200 (GE GE90 engines)	4	B772G	40.1	40.0	-0.1
Boeing 777-200 (PW PW4000 engines)	4	B772P	9.7	10.8	+1.1
Boeing 777-200 (RR Trent 800 engines)	4	B772R	49.8	54.2	+4.4
Boeing 777-200LR/300ER (GE GE90 engines)	4	B773G	43.3	48.7	+5.4
Boeing 777-300 (RR Trent 800 engines)	4	B773R	3.0	0.6	-2.4
Airbus A300	4	EA30	3.9	3.6	-0.3
Airbus A310	4	EA31	2.2	0.6	-1.6
Airbus A330	4	EA33	32.3	34.7	+2.4
Airbus A340-200/300	5	EA34	16.4	9.4	-7.0
Airbus A340-500/600	5	EA346	33.1	34.2	+1.1
Airbus A380 (Engine Alliance GP7000 engines)	5	EA38GP	4.0	5.7	+1.7
Airbus A380 (RR Trent 900 engines)	5	EA38R	5.0	7.5	+2.5

Aircraft type	Noise class	ANCON type	2011	2012	Change
Boeing 747-400 (GE CF6-80F engines)	5	B744G	11.5	8.1	-3.4
Boeing 747-400 (PW PW4000 engines)	5	B744P	10.2	7.5	-2.7
Boeing 747-400 (RR RB211 engines)	5	B744R	62.3	64.0	+1.7
Boeing 747SP	5	B747SP	0.2	< 0.1	-0.2
Boeing 747-100/200/300	6	B747	< 0.1	< 0.1	0.0
Boeing 727 (Chapter 3)	8	B727	0.1	< 0.1	-0.1
Ilyushin Il-62	8	IL62	0.0	< 0.1	0.0
		TOTAL	1268.6	1255.1	-13.5 (-1%)

Note: Totals may not sum exactly due to rounding.

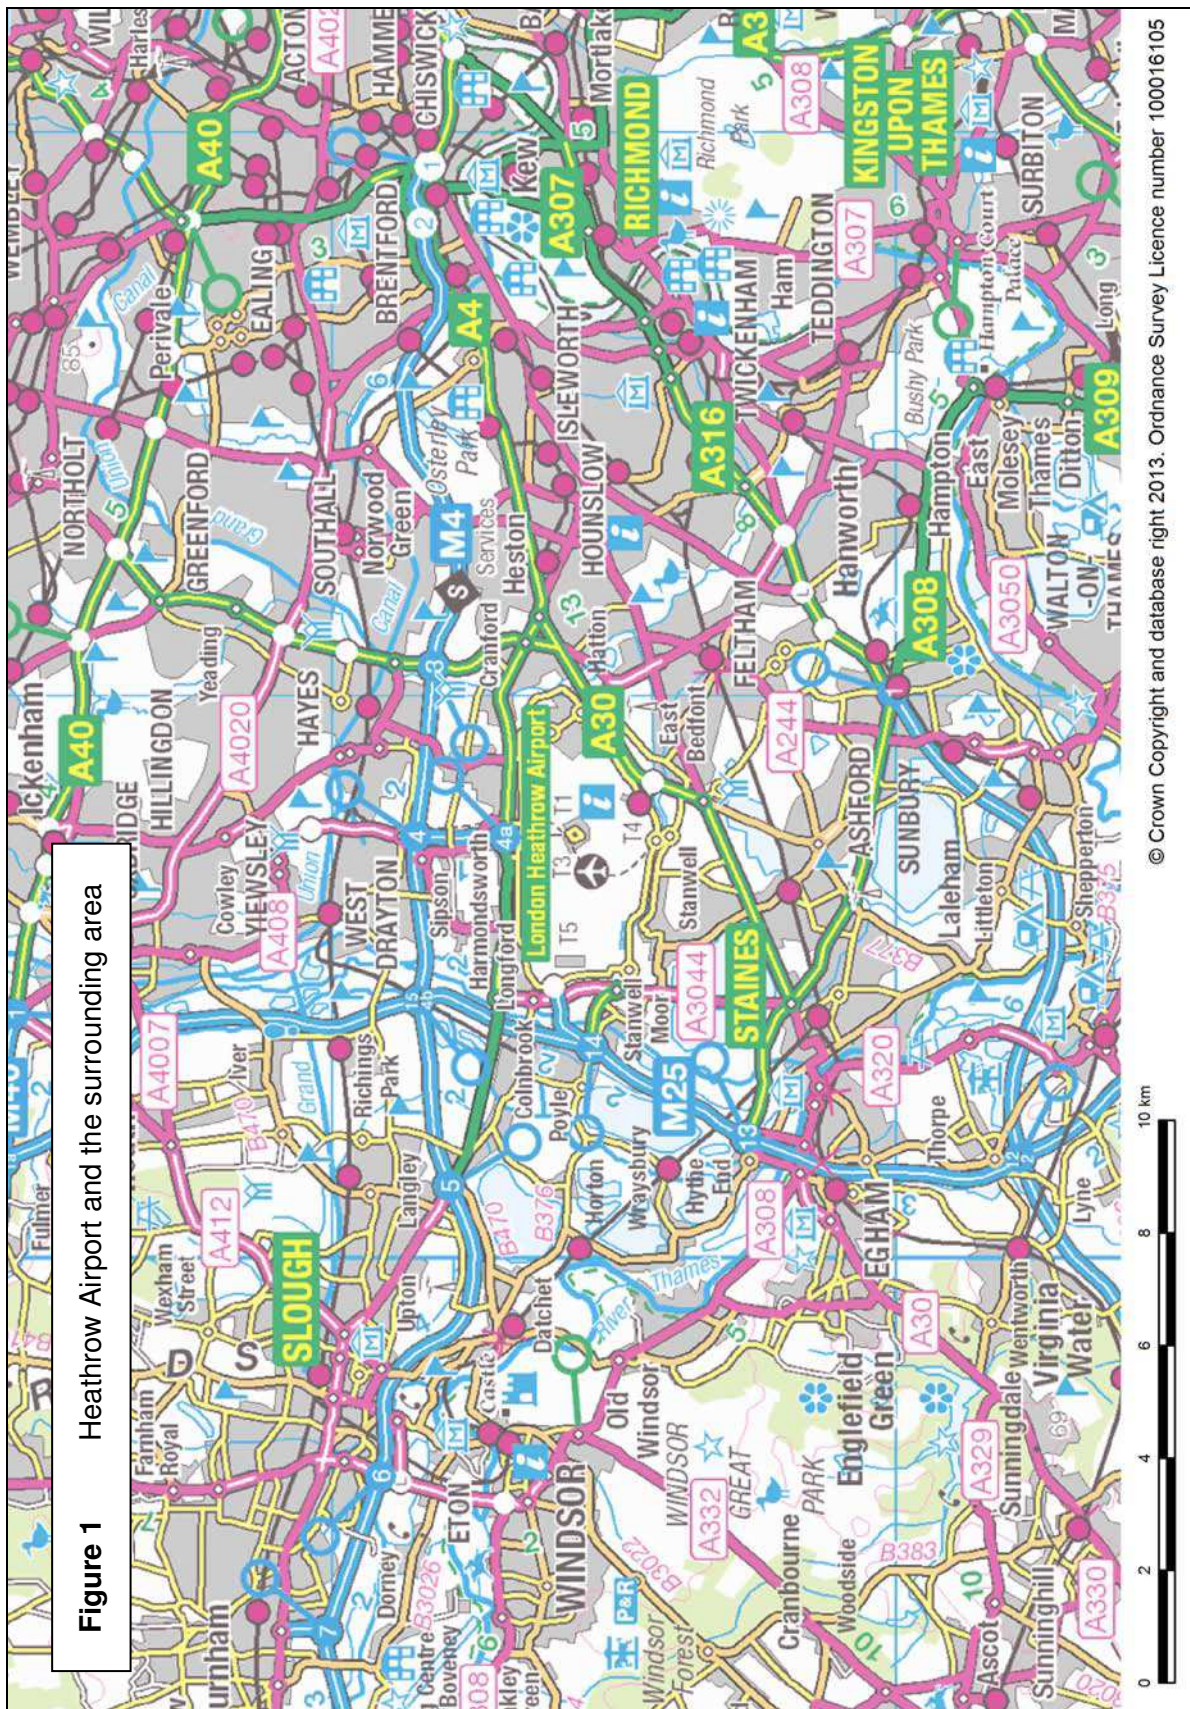

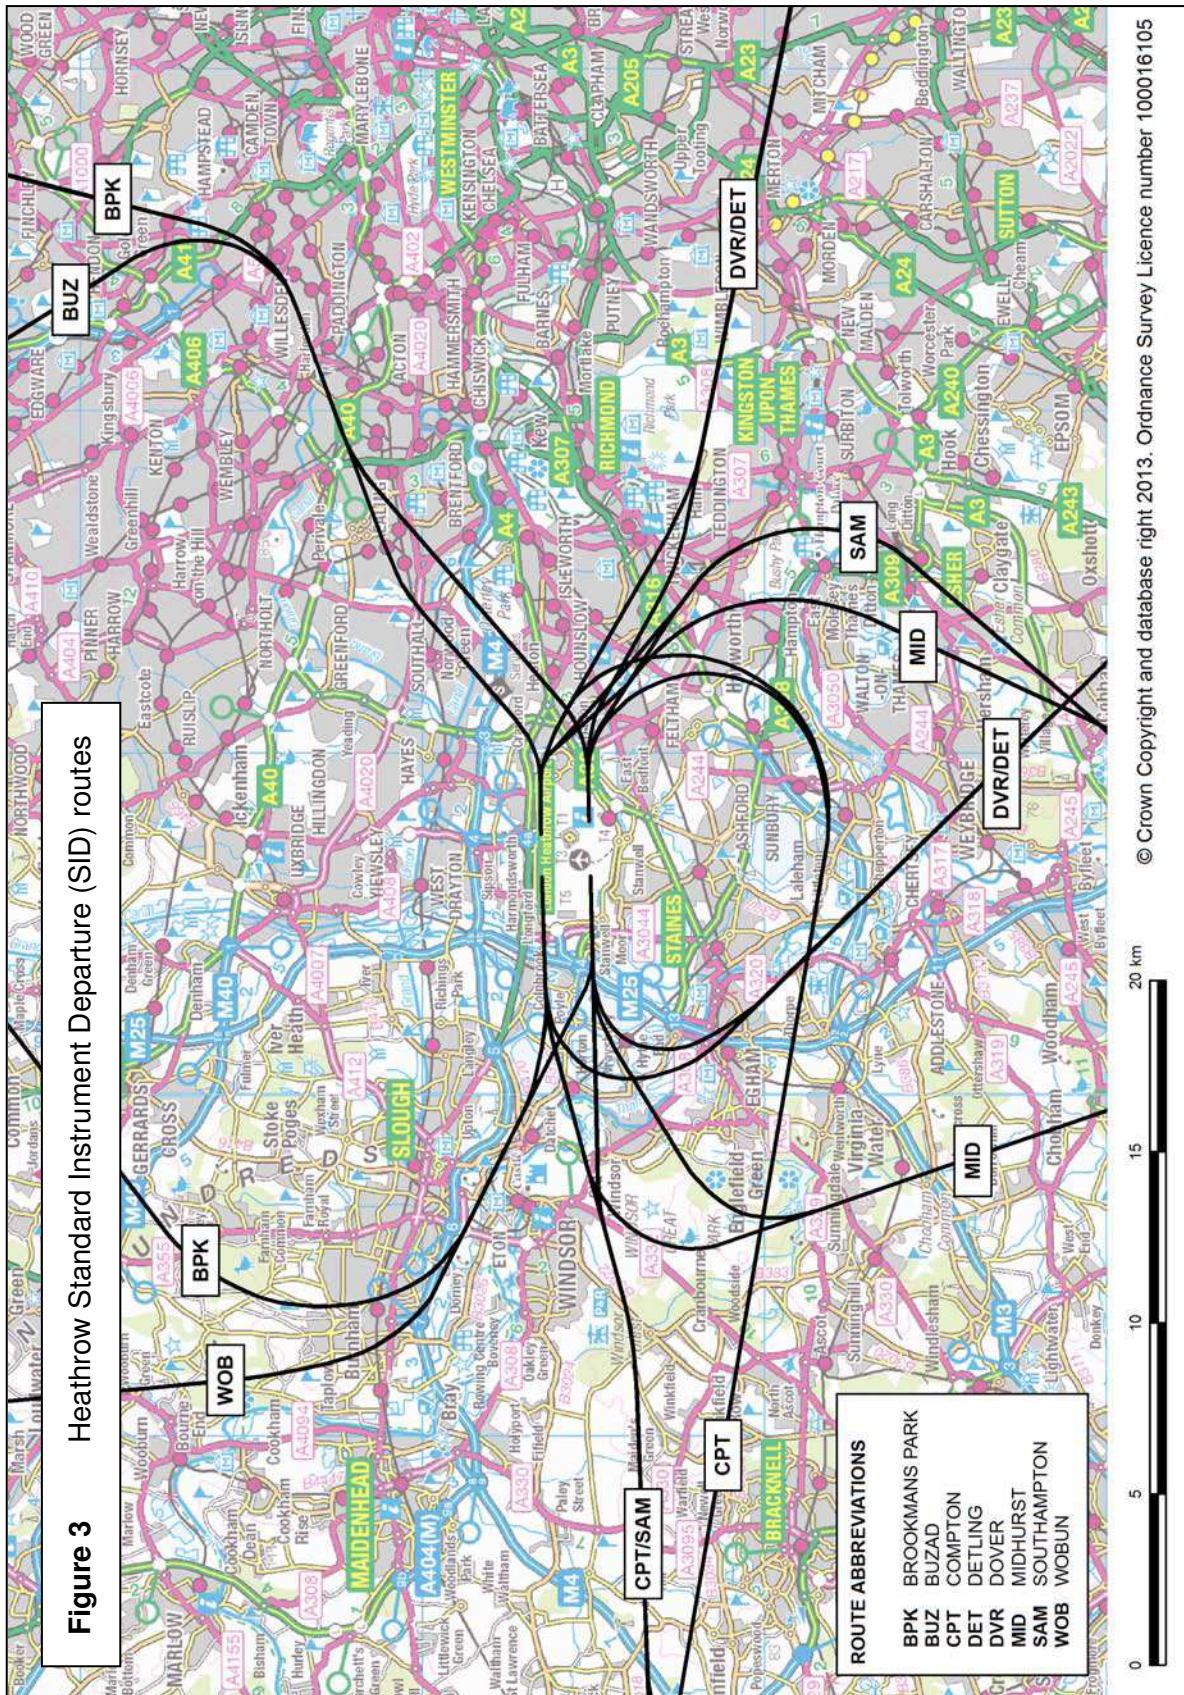


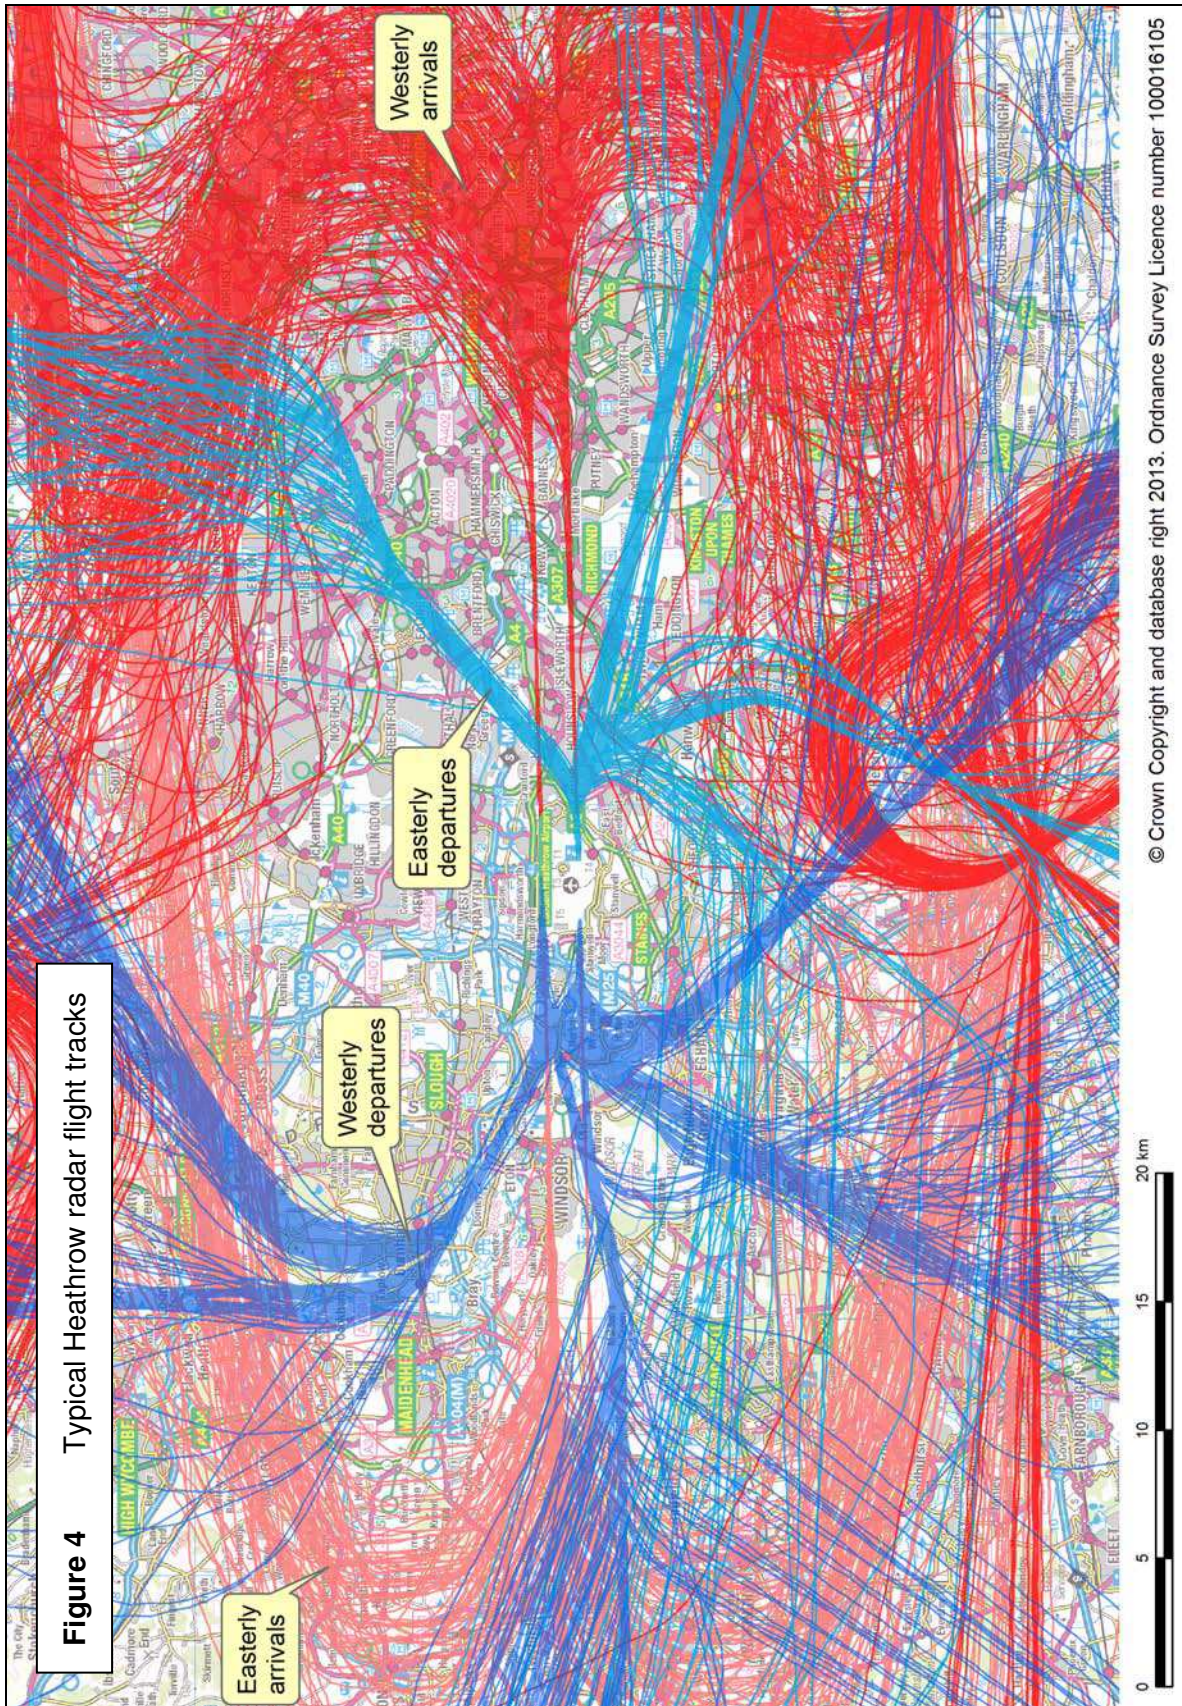


Figure 5 Heathrow noise class trend 1988-2012

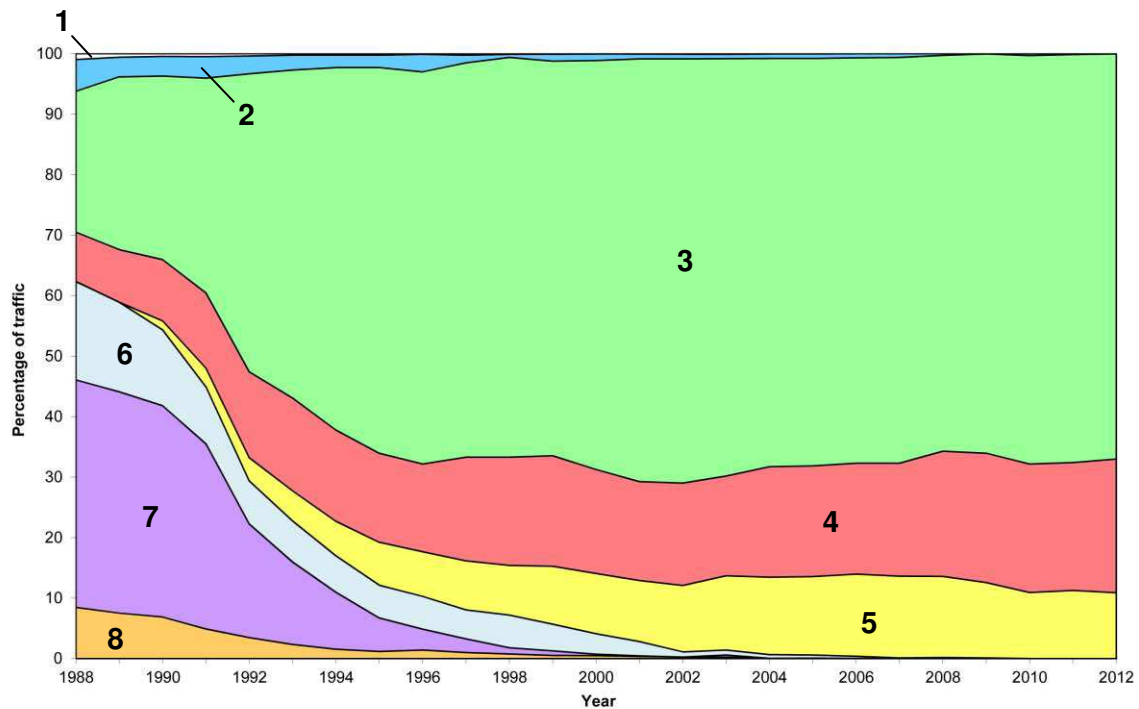

Note: The percentages from 1990 onwards relate to the average 16-hour Leq day; before 1990 the percentages relate to the average 12-hour NNI day (0700-1900 local time). Also, the percentages before 1992 are based on departures only, from 1992 they relate to total movements.

Key to noise classes

Propeller aircraft

- 1 Small props, e.g. single/twin piston and turboprop light aircraft
- 2 Large props, e.g. 2- and 4-propeller transports, e.g. ATR-42, BAe ATP

Chapter 3/4 jets

- 3 Short-haul, e.g. Airbus A319, Boeing 737-300
- 4 Wide-body twins, e.g. Boeing 767, Boeing 777
- 5 2nd generation wide-body 3/4-engine aircraft, e.g. Airbus A380, Boeing 747-400

Large Chapter 2/3 jets

- 6 1st generation wide-body 3/4-engine aircraft, e.g. Boeing 747-200


2nd generation twin jets

- 7 Narrow body twins (including hushkitted versions), e.g. Boeing 737-200

1st generation jets

- 8 Narrow body 3/4-engine aircraft (including hushkitted versions), e.g. Boeing 727

Figure 6 Heathrow 2012 average summer day movements by ANCON type

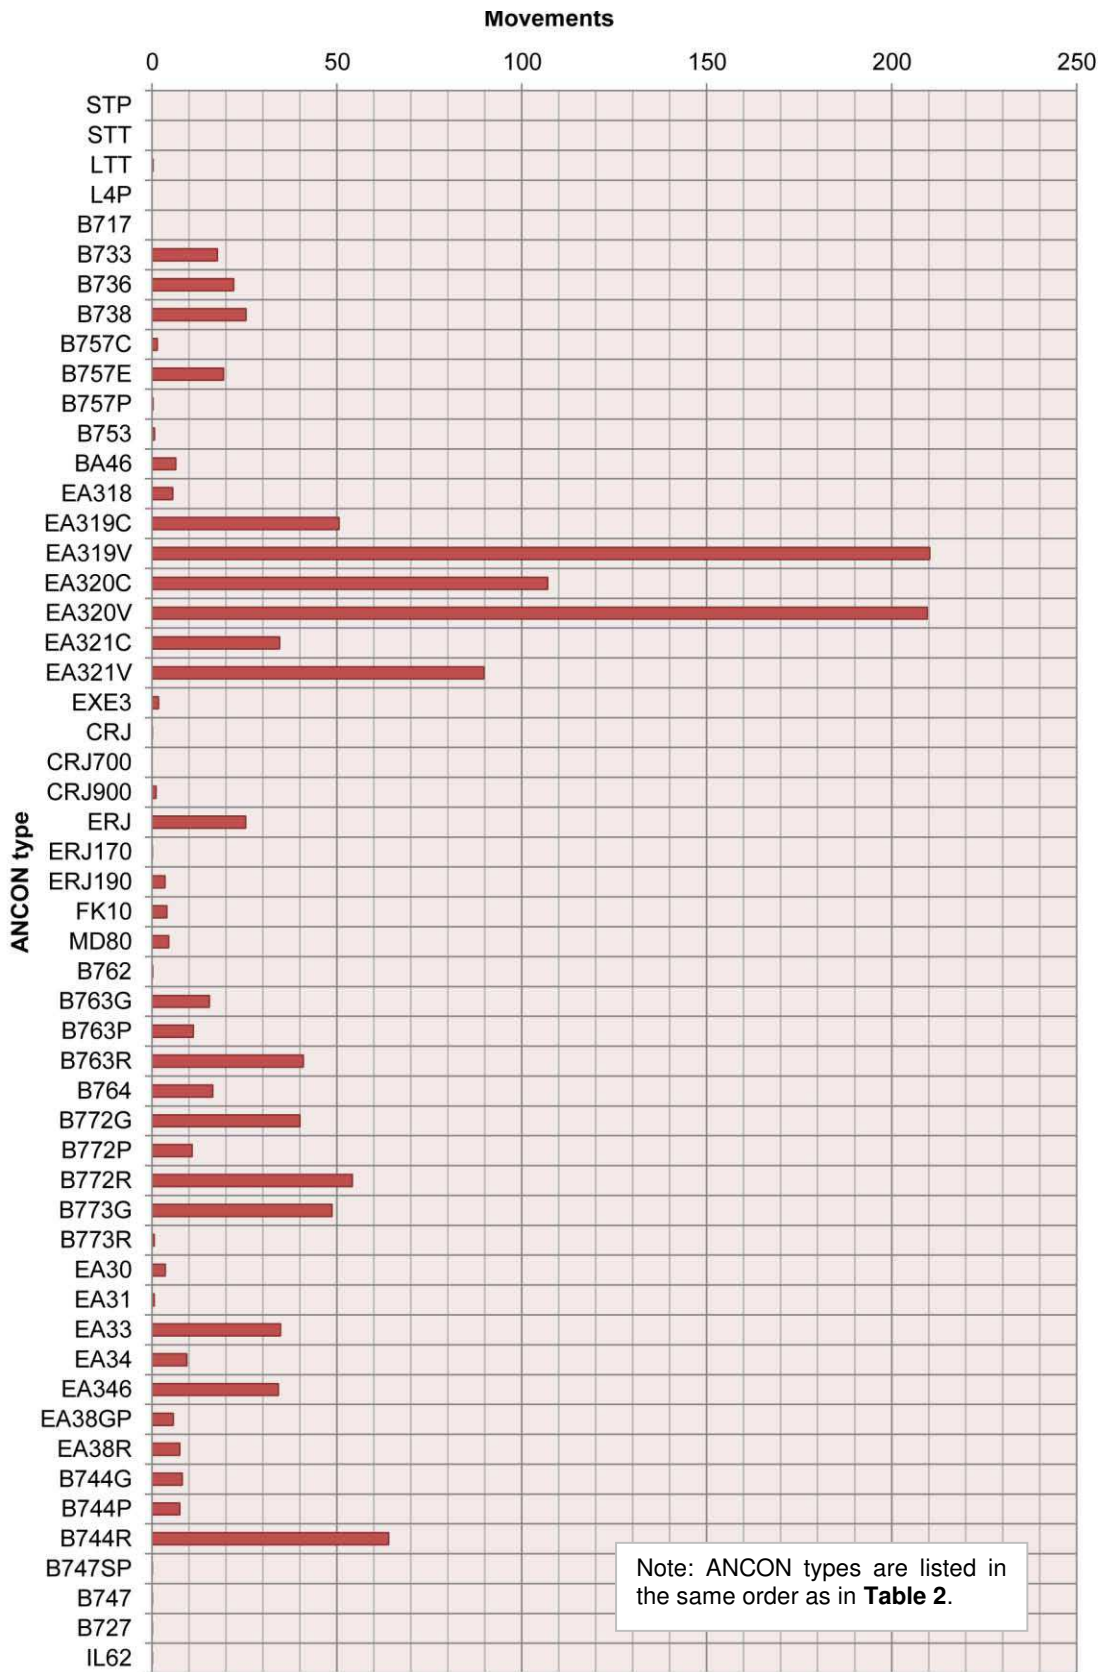

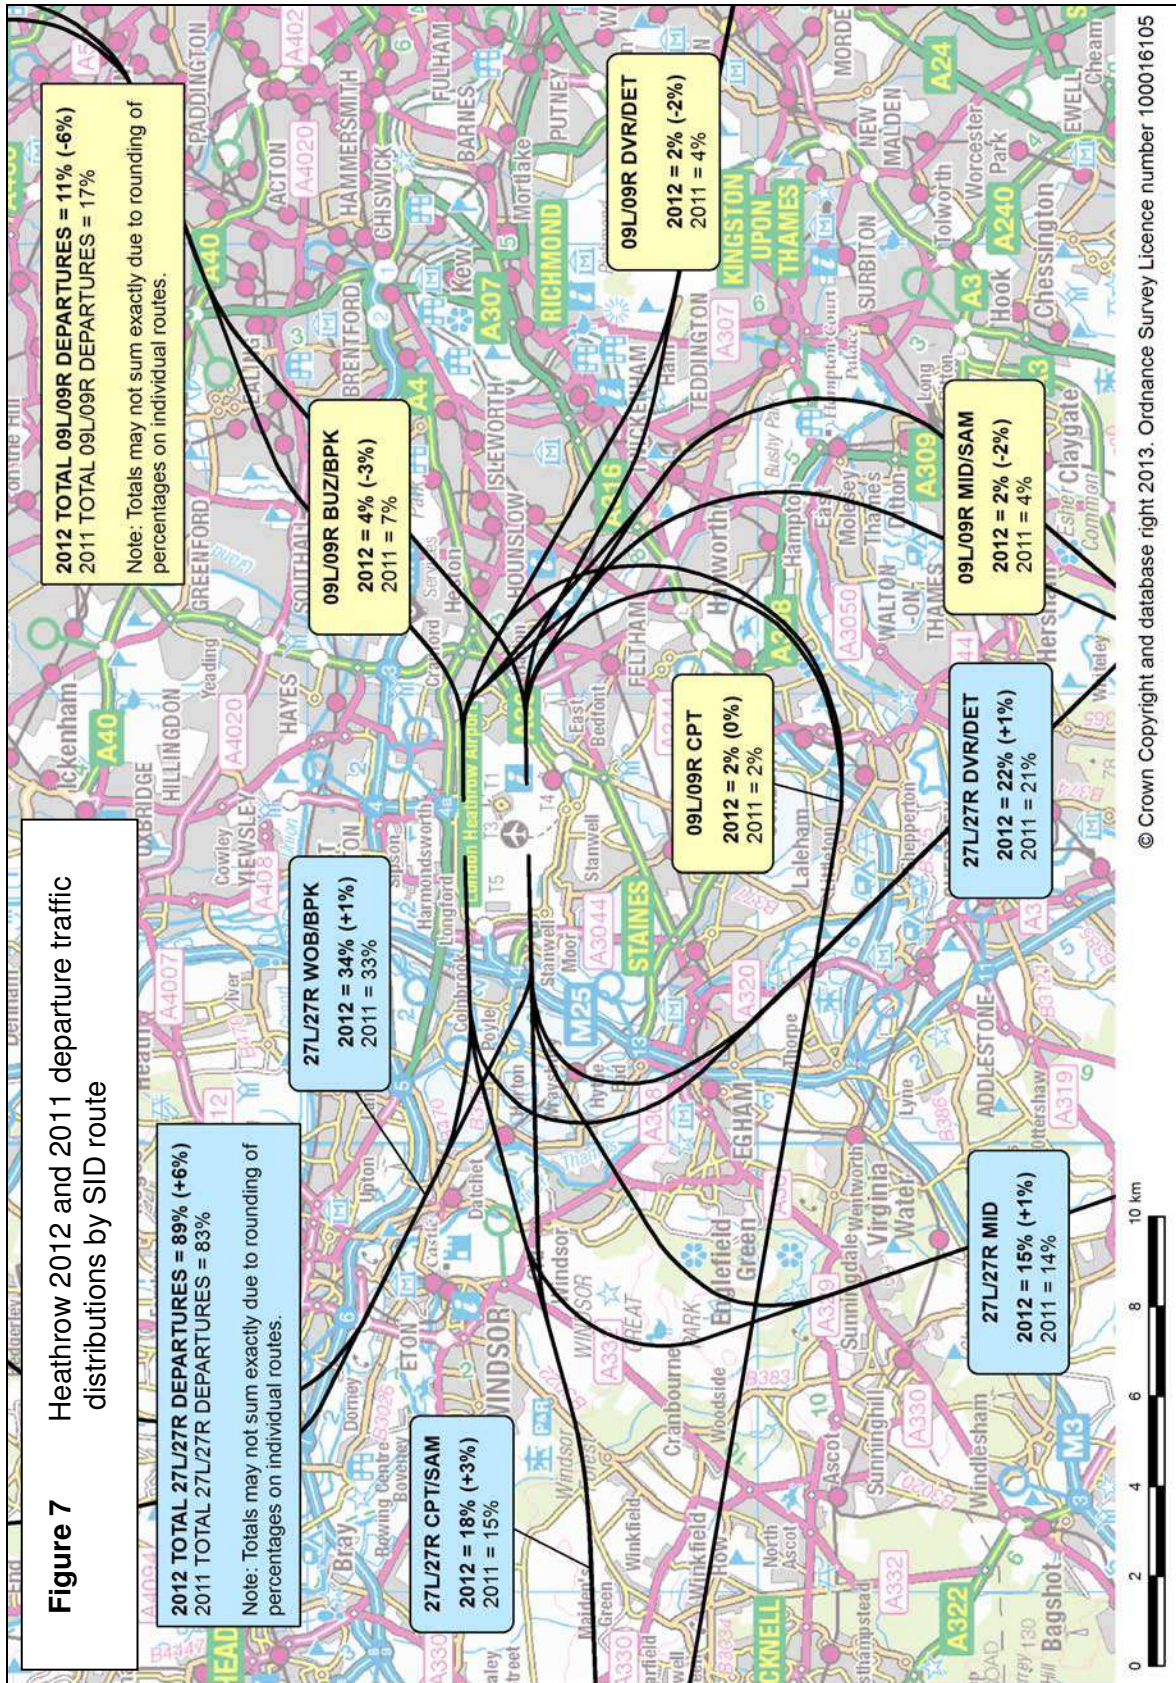
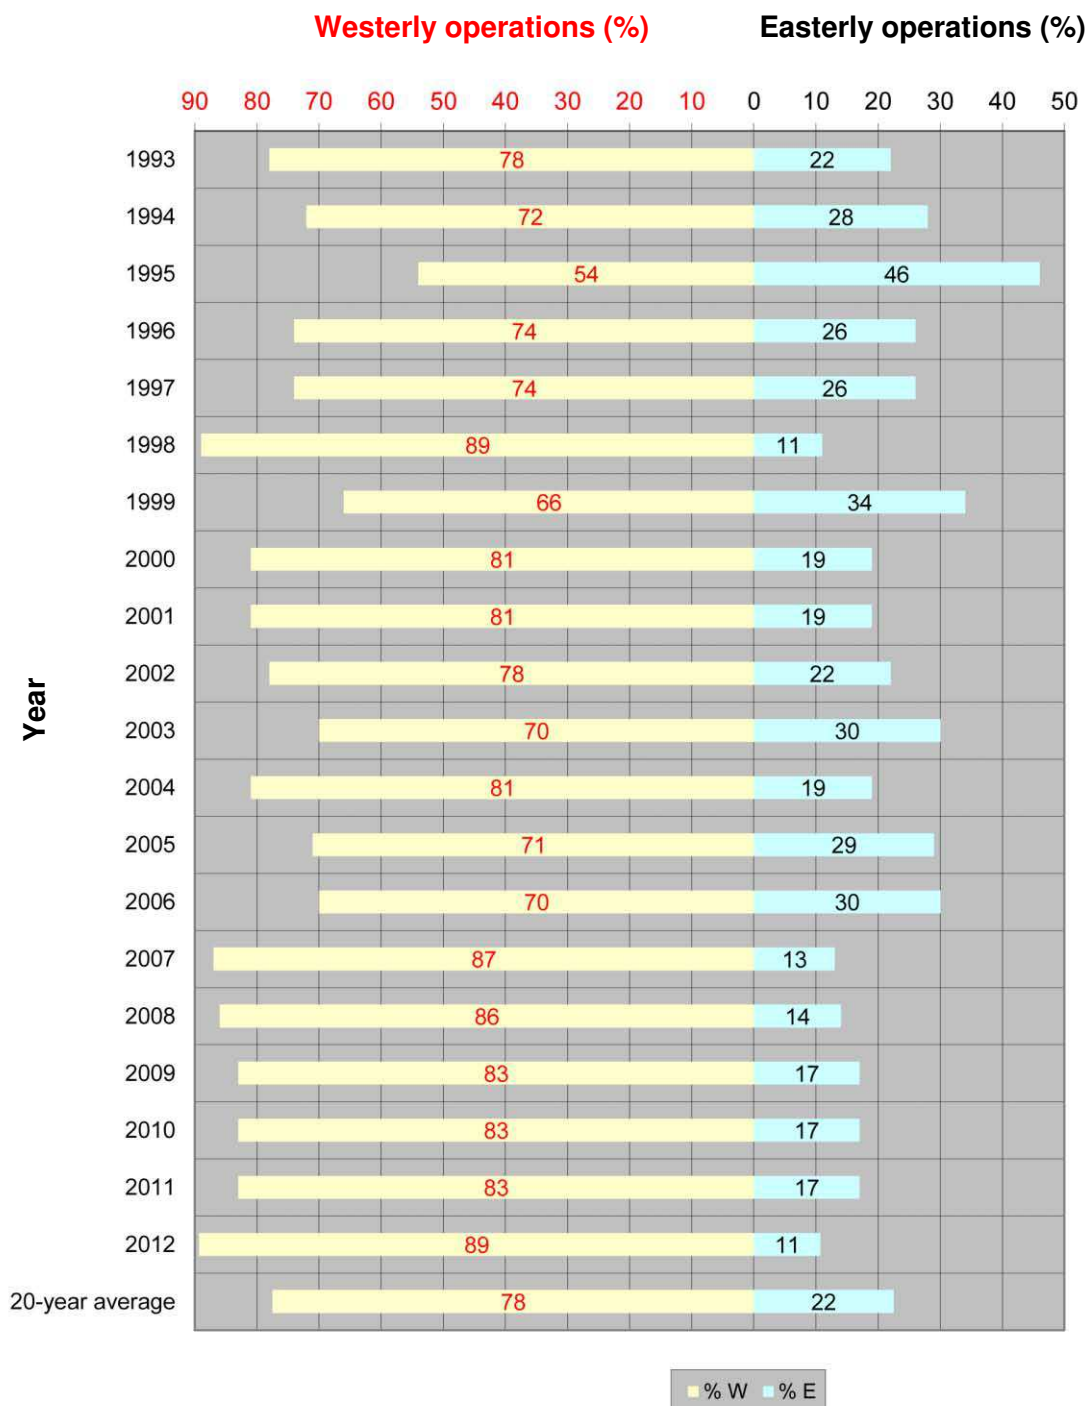
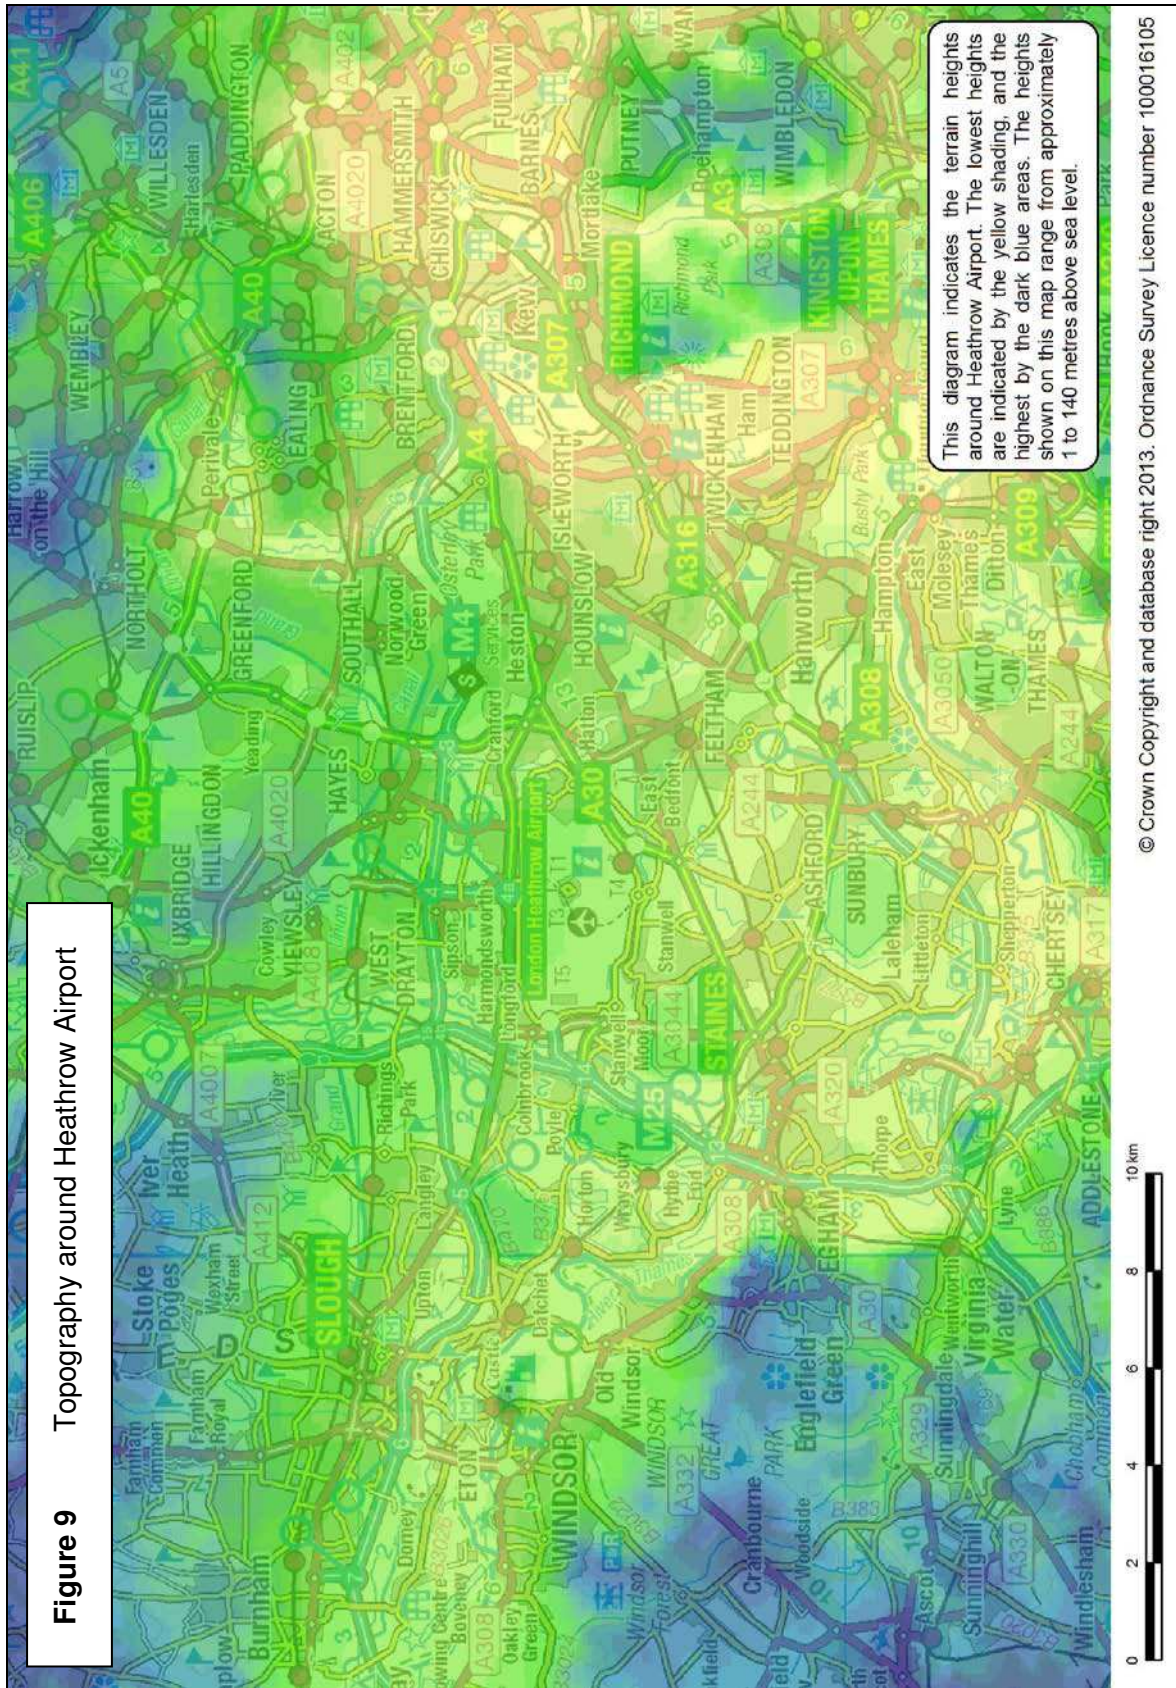
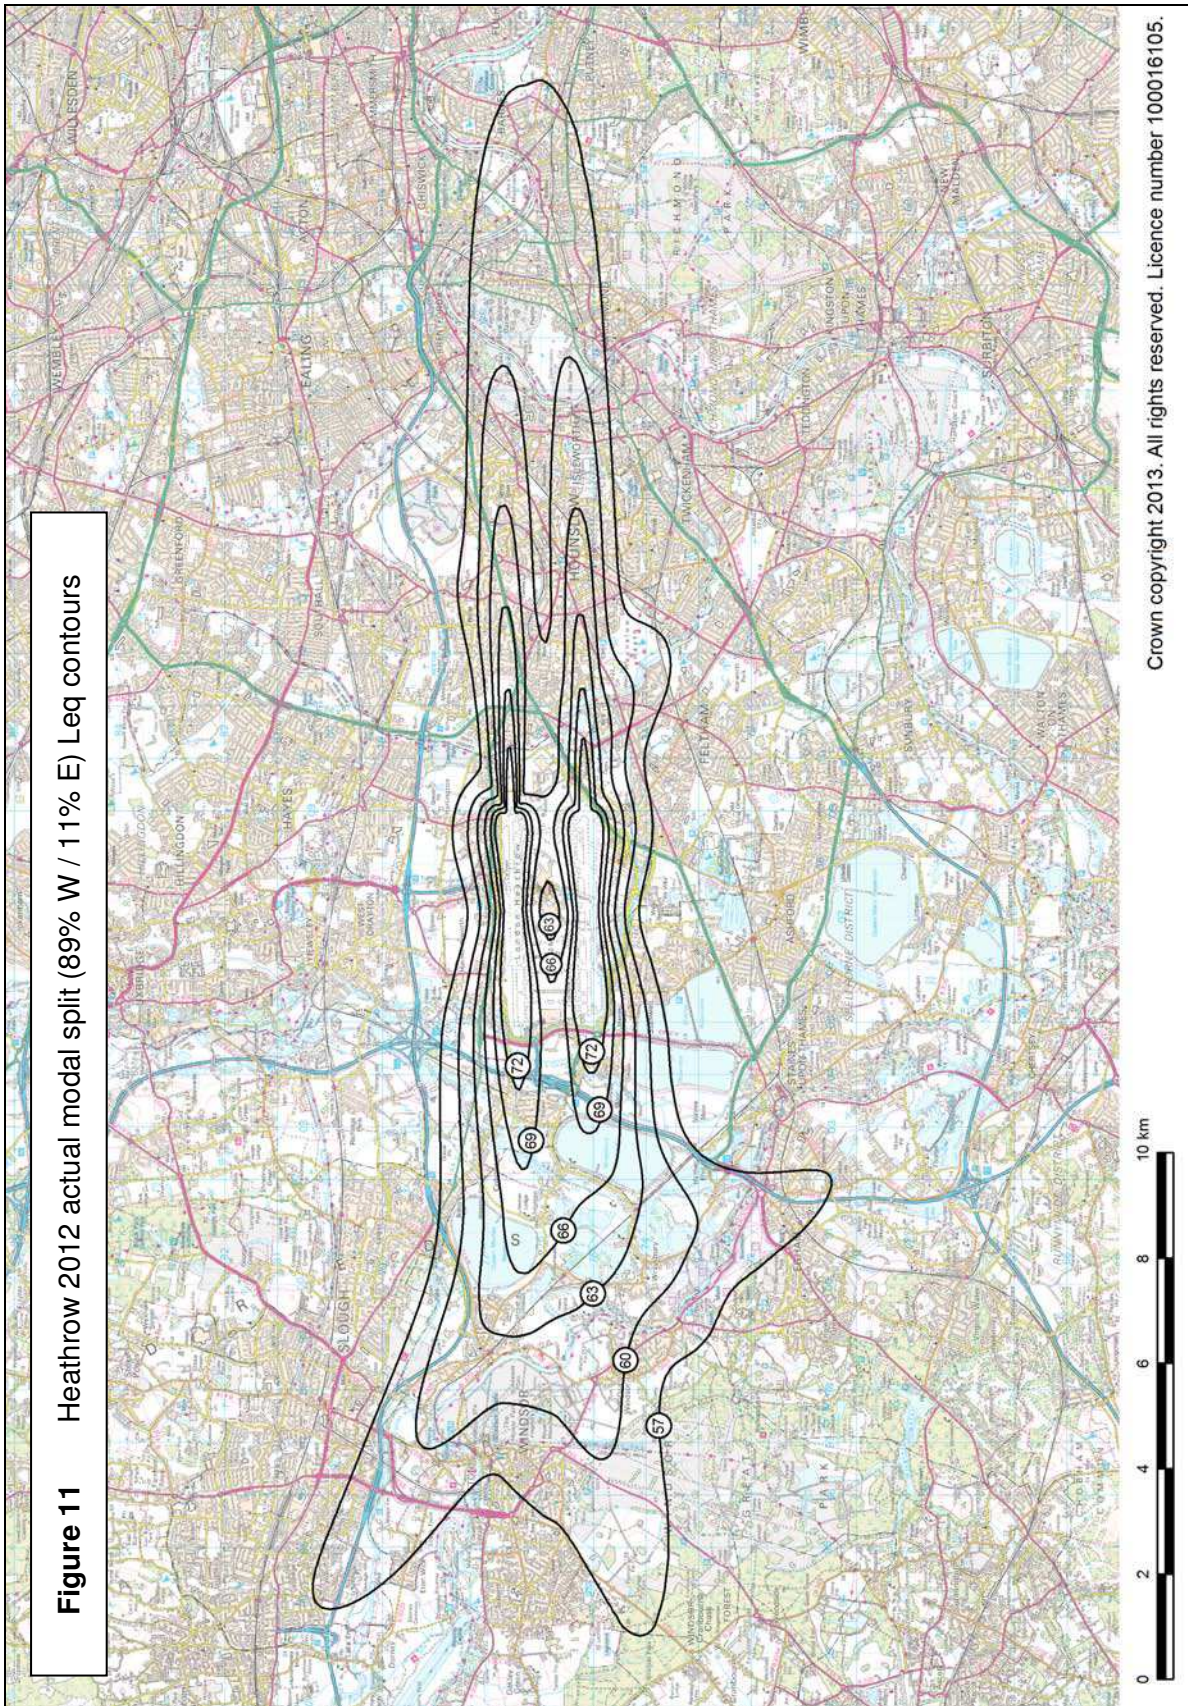
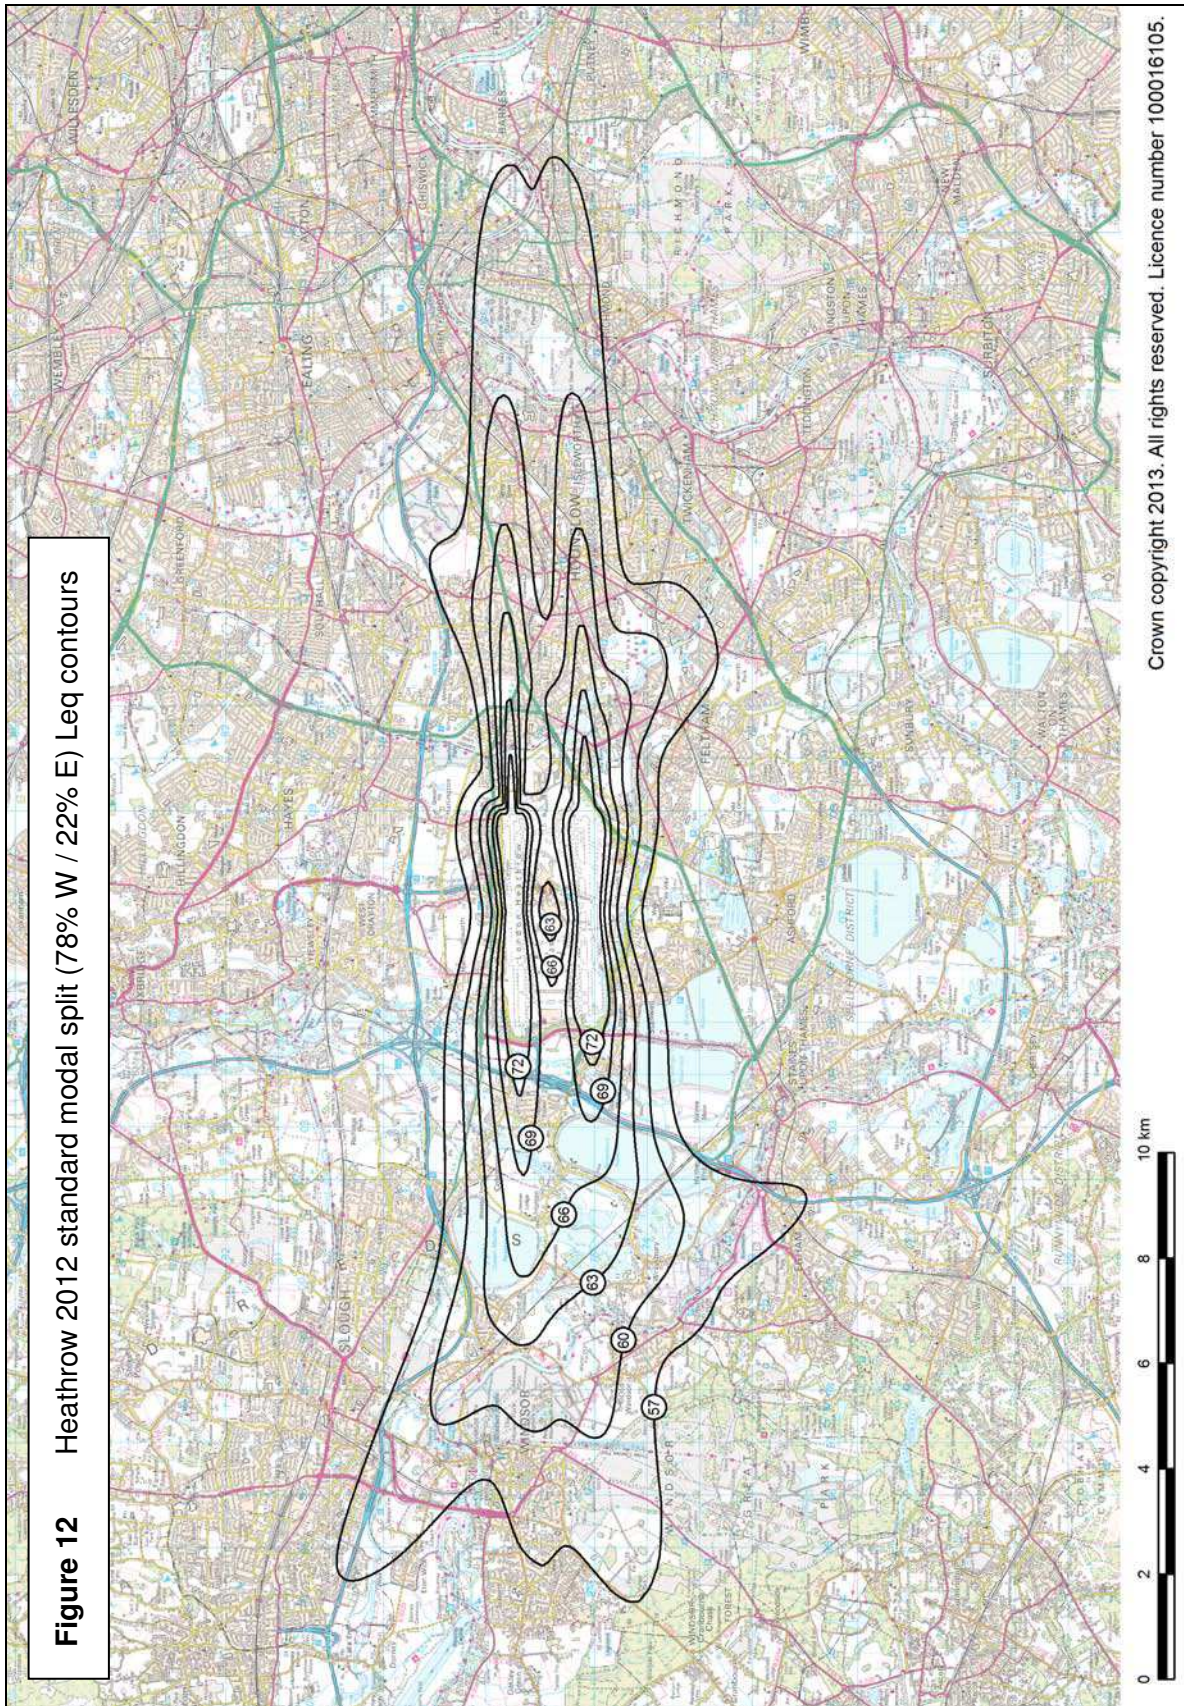



Figure 8 Heathrow average summer day runway modal splits 1993-2012









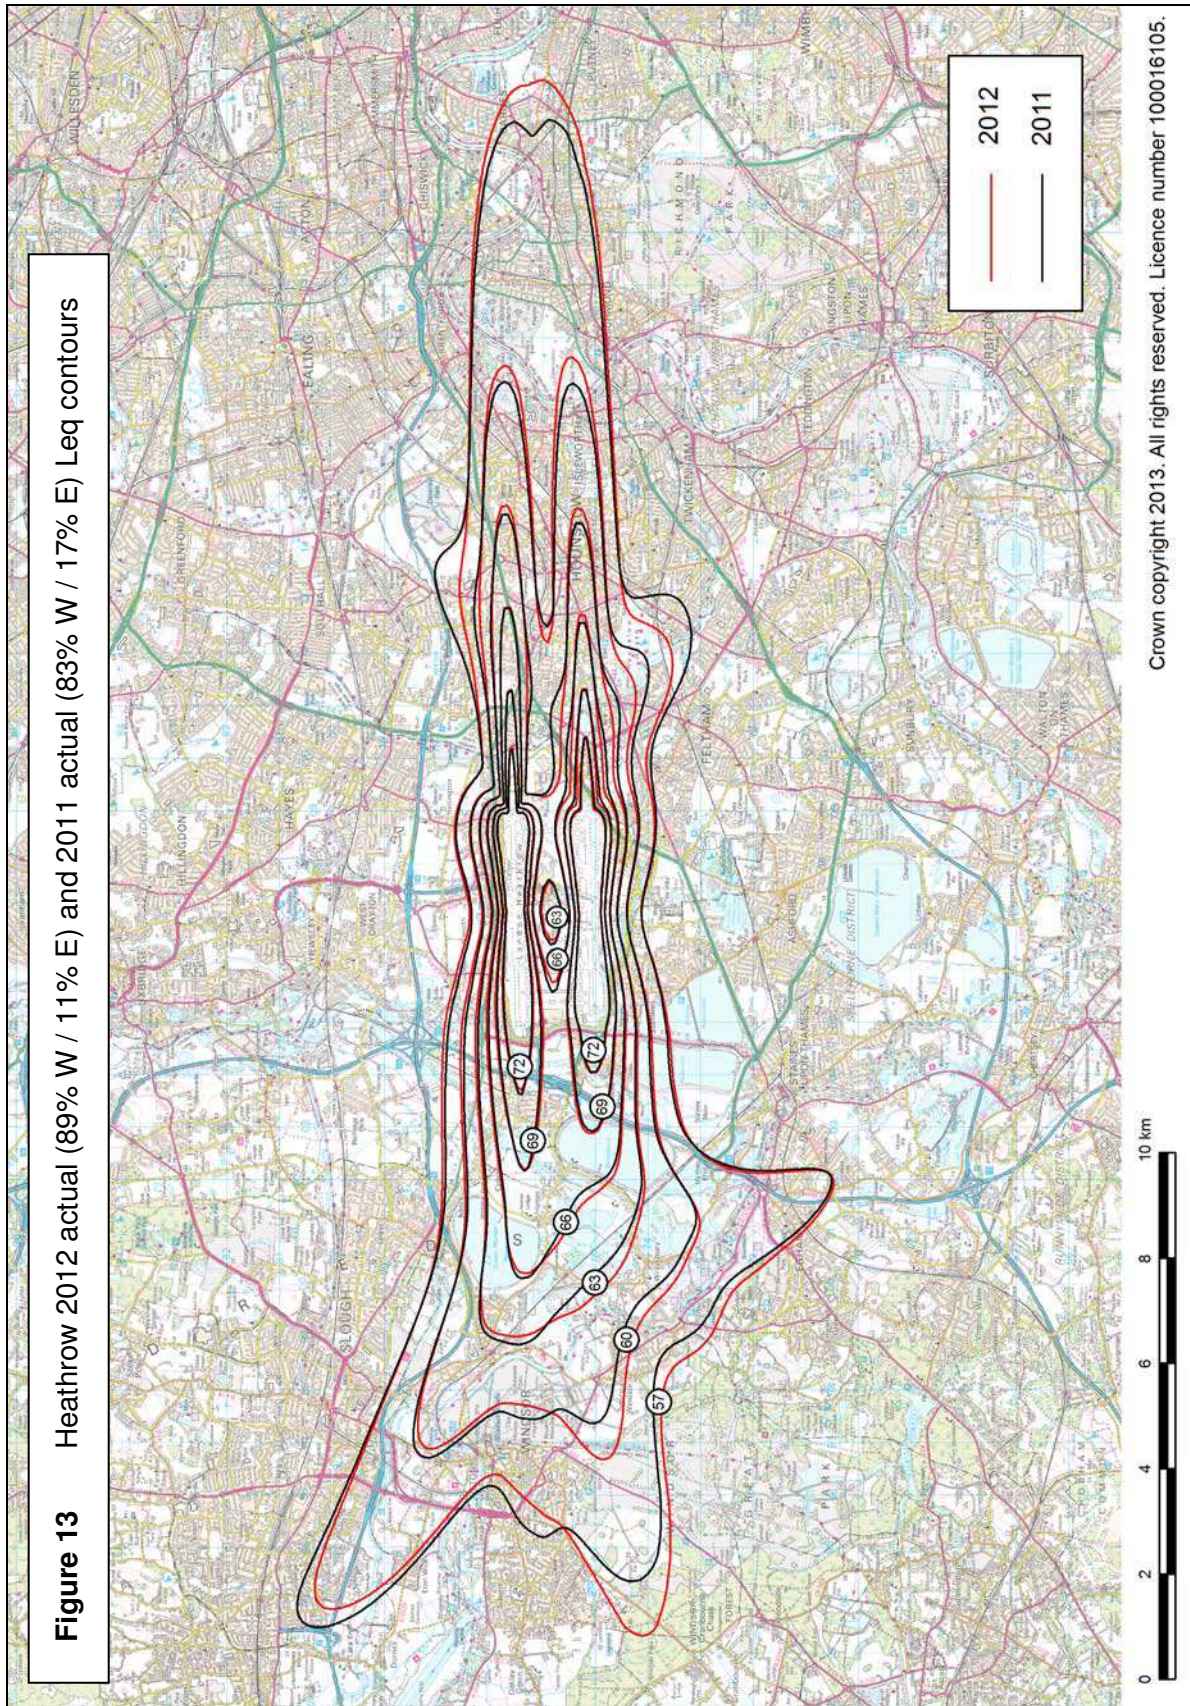

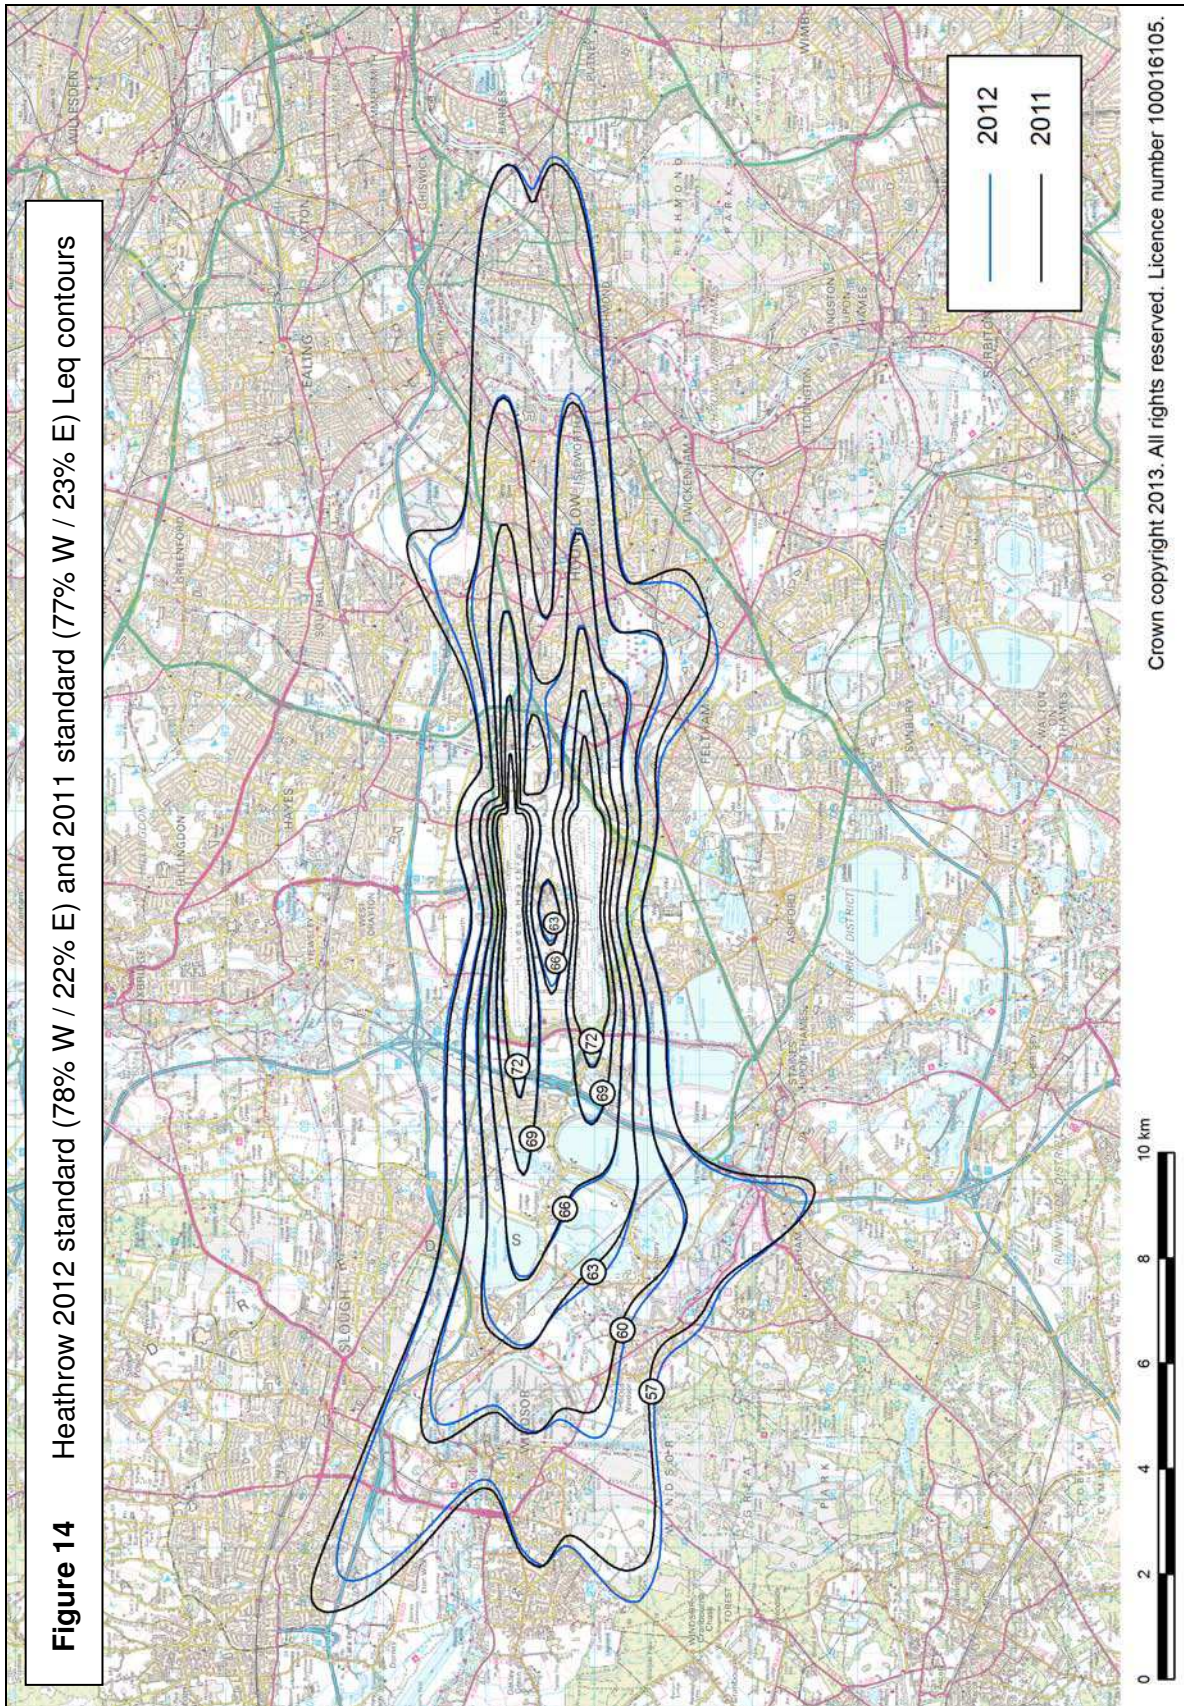


Figure 15 Heathrow annual traffic and Leq noise contour area/population trend 1988-2012

