

# **NASA SOUNDING ROCKET PROGRAM HANDBOOK**

Sounding Rockets Program Office  
Suborbital & Special Orbital Projects Directorate



**Goddard Space Flight Center  
Wallops Flight Facility  
Wallops Island, Virginia**

**June 2005**

## Preface

This Handbook describes the capabilities of the Sounding Rocket program, the design and technology applications used by that program, and the processes established to integrate the customer (principal investigator/program user/scientist/experimenter) into the mission team to ensure the highest probability of a successful project.

Neither the United States Government nor any person acting on the behalf of the United States Government assumes any liability resulting from the use of information contained in this document or warrants that the use will be free from privately owned rights.

The use of a company name does not imply approval or recommendation of the product to the exclusion of others that may also be suitable.

(Please check the NSROC website: [WWW.NSROC.COM](http://WWW.NSROC.COM) to verify that  
this is the current version prior to use.)

# SOUNDING ROCKET PROGRAM HANDBOOK

## TABLE OF CONTENTS

### PREFACE

<b>SECTION 1: THE NASA SOUNDING ROCKET PROGRAM (NSRP)</b>	<b>1</b>
1.1 THE PROGRAM: 1959 - THE PRESENT	1
1.2 NASA ORGANIZATIONAL RESPONSIBILITIES	2
1.2.1 PROGRAM MANAGEMENT	3
1.2.2 SOUNDING ROCKET WORKING GROUP (SRWG)	3
1.3 SOUNDING ROCKET PROGRAM CUSTOMER'S ROLE	3
1.3.1 PHILOSOPHY	3
1.3.2 PAYLOAD AND INSTRUMENTATION	4
1.4 SOUNDING ROCKET PROJECT SUPPORT ELEMENTS	4
1.4.1 PROGRAM-PROVIDED SUPPORT SERVICES	5
<b>SECTION 2: THE SOUNDING ROCKET FLIGHT PROJECT</b>	<b>12</b>
2.1 THE MISSION INITIATION CONFERENCE (MIC)	13
2.2 THE REQUIREMENTS DEFINITION MEETING (RDM)	16
2.3 THE DESIGN REVIEW (DR)	16
2.4 PAYLOAD FABRICATION AND PRE-INTEGRATION TESTING	19
2.5 PRE-INTEGRATION REVIEW	19
2.6 PAYLOAD INTEGRATION AND TESTING	20
2.6.1 PRE_INTEGRATION CHECKOUT	20
2.6.2 PAYLOAD INTEGRATION	21
2.6.3 ACCEPTANCE TESTING	21
2.6.4 WAIVERS	21
2.6.5 FINAL CHECKOUT	22
2.6.6 INTEGRATION AND TEST SCHEDULING	22

2.7	MISSION READINESS REVIEW (MRR)	22
2.8	LAUNCH OPERATIONS	23
2.8.1	FLIGHT REQUIREMENTS PLAN	23
2.8.2	OPERATIONS AND SAFETY DIRECTIVE (OSD)	24
2.8.3	OPERATIONAL SAFETY	24
2.9	POST-LAUNCH ACTIVITIES	24
2.9.1	QUICK LOOK REPORTS	24
2.9.2	PRELIMINARY POST-FLIGHT REPORT	24
2.9.3	CUSTOMER'S WRITTEN RESPONSE	25
2.9.4	POST FLIGHT CONFERENCE	25
2.9.5	POST FLIGHT DATA	25
2.10	MISSION SUCCESS/FAILURE	25
2.10.1	ANOMALY INVESTIGATION BOARD (AIB)	26
2.10.2	IN-FLIGHT ANOMALIES	26
2.10.3	AIB ACTION ITEM - RECOMMENDATION IMPLEMENTATION TEAM	26
2.11	THE MISSION CLOSE-OUT REPORT	27
	<b>SECTION 3: SOUNDING ROCKET LAUNCH VEHICLES &amp; PERFORMANCE CAPABILITIES</b>	28
3.1	NASA MISSION DESIGNATION SYSTEM	28
3.2	NASA SOUNDING ROCKETS	28
3.2.1	PERFORMANCE CHARACTERISTICS	28
3.3	BOOST GUIDANCE SYSTEMS (BGS)	32
3.3.1	OPERATION OF THE S-19/D/G BOOST GUIDANCE SYSTEMS	32
	<b>SECTION 4: SOUNDING ROCKET PAYLOAD DESIGN CONSIDERATIONS</b>	35
4.1	PAYLOAD DESIGN	35
4.2	FLIGHT PERFORMANCE	36
4.2.1	MECHANICAL LOADS AND VIBRATION	36

4.2.2	THERMAL CONSIDERATIONS	37
4.2.3	VACUUM AND OUT-GASSING	37
4.2.4	AERODYNAMIC DESIGN FACTORS	38
4.3	OTHER PAYLOAD DESIGN CONSIDERATIONS	38
4.3.1	ACCESSIBILITY	38
4.3.2	AVAILABILITY OF PARTS	38
4.3.3	DYNAMIC BALANCE	38
4.3.4	COST	38
4.3.5	REDUNDANCY	38
4.3.6	WEIGHT	39
4.3.7	TESTING	39
	<b>SECTION 5: PAYLOAD SYSTEMS</b>	<b>40</b>
5.1	TELEMETRY SYSTEMS	40
5.1.1	DATA TRANSMISSION SYSTEMS	41
5.1.2	PCM/FM SYSTEMS	41
5.1.3	SPARCS (WFF87) ENCODER SYSTEMS	41
5.1.4	FM/FM SYSTEMS	42
5.2	ATTITUDE INSTRUMENTATION SYSTEMS	42
5.2.1	THE ST-500 STAR TRACKER	42
5.2.2	THE GLN-MAC-200 INERTIAL ATTITUDE SENSOR	44
5.3	MAGNETOMETER	45
5.4	SOLAR/LUNAR SENSORS	45
5.4.1	THE NSRPC(A) SUN SENSOR	46
5.5	HORIZON SENSOR	47
5.6	TELEVISION CAMERAS	47
5.7	FILM CAMERAS	48
5.8	RATE SENSOR	48

5.9	TRANSMITTERS	49
5.10	COMMAND SYSTEMS	49
5.11	TELEMETRY ANTENNAS	50
5.12	INSTRUMENTATION AND EXPERIMENT POWER SUPPLY	50
5.12.1	SILVER ZINC CELLS	51
5.12.2	NICKEL CADMIUM	51
5.12.3	VOLTAGE OUTPUT	51
5.12.4	HEATERS	52
5.12.5	SWITCHING	52
5.12.6	PYROTECHNIC POWER SUPPLY	52
5.13	IN-FLIGHT EVENT TIMING SYSTEMS	52
5.13.1	MECHANICAL TIMERS	52
5.13.2	ELECTROMECHANICAL & ELECTRONIC TIMERS	53
5.13.3	BAROMETRIC SWITCHES	54
5.14	TRACKING SYSTEMS	54
5.14.1	RADAR TRANSPONDERS	54
5.14.2	DOPPLER RANGING	55
5.14.3	GLOBAL POSITIONING SYSTEM (GPS)	55
5.14.4	MAGNETIC CALIBRATION FACILITY	56
5.15	MECHANICAL SYSTEMS AND MECHANISMS	57
5.15.1	NOSE CONES	57
5.15.2	STRUCTURES AND SKINS	57
5.15.3	VACUUM DOORS	57
5.15.4	DEPLOYMENT MECHANISMS	57
5.15.5	VACUUM/WATER SEALING	57
5.15.6	DESPIN SYSTEMS	57
5.16	RECOVERY SYSTEMS	58

5.16.1	LAND	58
5.10.2	WATER	58
5.10.3	RECOVERY AIDS	59
5.17	HIGH ALTITUDE DECELERATORS	59
5.18	ATTITUDE CONTROL SYSTEMS	60
5.18.1	SOLAR POINTING ATTITUDE ROCKET CONTROL SYSTEM (SPARCS VII)	61
5.18.2	NSROC INERTIAL ACS (NIACS)	66
5.18.3	NSROC MAGNETIC ACS (NMACS)	69
5.18.4	NSROC RATE CONTROL SYSTEM (NRACS)	70
5.18.5	CELESTIAL NIACS (FINE POINTING) INERTIAL ACS	71
	<b>SECTION 6: ENVIRONMENTAL TESTING POLICIES</b>	<b>72</b>
6.1	GENERAL REQUIREMENTS	72
6.1.1	QUALIFICATION TESTING	72
6.1.2	ACCEPTANCE TESTING	72
6.1.3	PRINCIPAL INVESTIGATOR TESTING	72
6.1.4	TEST PLAN	72
6.2	TESTING EQUIPMENT AND CAPABILITIES	73
6.2.1	MASS PROPERTIES MEASUREMENT SYTEMS (WFF & WSMR)	73
6.2.2	STATIC AND DYNAMIC BALANCING MACHINE (WFF & WSMR)	74
6.2.3	SHAKERS (WFF & WSMR)	75
6.2.4	VACUUM CHAMBERS (WFF & WSMR)	76
6.2.5	BEND TEST FIXTURES (WFF & WSMR)	78
6.2.6	SPIN DEPLOYMENT AND SEPARATION EQUIPMENT (WFF)	79
6.2.7	CENTRIFUGE MACHINE (WFF)	80
6.2.8	MAGNETIC TEST FACILITY (WFF & WSMR)	80
6.2.9	SPIN BALANCE FACILITY (WFF)	82
6.2.10	DARK ROOM (WFF & WSMR)	83

6.2.11	FACILITY CLEANLINESS (WFF & WSMR)	83
6.2.12	TARGETING (WFF & WSMR)	83
6.2.13	OPTICS CAPABILITIES (WFF & WSMR)	83
6.3	PAYLOAD TESTING	84
6.3.1	STATIC AND DYNAMIC BALANCE	84
6.3.2	STATIC LOAD (BENDING)	85
6.3.3	MASS PROPERTIES	85
6.3.4	VIBRATION	86
6.3.5	WAIVERS	88
6.3.6	TEST TIMES	88
6.4	COMPONENT TESTING	88
	<b>SECTION 7: NASA/GSFC/WFF SAFETY POLICY AND RESPONSIBILITIES</b>	<b>90</b>
7.1	SAFETY POLICY	91
7.2	THE RANGE SAFETY ORGANIZATION	92
7.2.1	SAFETY RESPONSIBILITIES OF THE MISSION MANAGER	92
7.2.2	SAFETY RESPONSIBILITIES OF THE PRINCIPAL INVESTIGATOR	93
7.3	GROUND SAFETY PLAN	94
7.4	FLIGHT SAFETY PLAN	95
7.4.1	IMPACT CRITERIA	95
7.4.2	OVERFLIGHT CRITERIA	96
7.4.3	FLIGHT TERMINATION CRITERIA	96
7.4.4	FLIGHT TERMINATION SYSTEM DESIGN REQUIREMENTS	96
7.4.5	FLIGHT PLANNING CRITERIA	96
7.4.6	RANGE CLEARANCE CRITERIA FOR GSFC/WFF LAUNCH RANGE	96
7.4.7	OPERATIONAL PROCEDURES	97
7.5	SAFETY ANALYSIS REPORT	97



<b>SECTION 8: LAUNCH OPERATIONS</b>	<b>98</b>
8.1 LAUNCH RANGES	98
8.2 LAUNCH OPERATIONS	100
8.2.1 RULES TO REMEMBER	100
8.2.2 ROLE OF THE MISSION MANAGER	100
8.2.3 THE FLIGHT REQUIREMENTS PLAN (FRP)	101
8.2.4 TEST AND EVALUATION	101
8.2.5 THE FIELD SCHEDULE	101
8.2.6 THE PREFLIGHT CONFERENCE	101
8.2.7 RECOVERY	101
8.2.8 POST-FLIGHT CONFERENCE	101
8.3 FOREIGN RANGES	102
8.3.1 EXPERIMENTAL TECHNIQUES	102
8.3.2 TRAVEL & LODGING	103
8.3.3 ACCESS	103
8.3.4 FOREIGN NATIONALS	103
8.3.5 EXPORT CONTROL	103
8.3.6 POSTAL SERVICE	103
8.3.7 SHIPPING	103
8.4 MOBILE RANGE OPERATIONS	104
8.4.1 REMOTE LOCATIONS	107
8.4.2 HARSH ENVIRONMENT	107
8.4.3 LIMITED TECHNICAL FACILITIES	107
8.4.4 LIMITED COMMUNICATIONS	108
<b>SECTION 9: DATA PROCESSING AND ANALYSIS</b>	<b>109</b>
9.1 COMPUTER SYSTEMS	109
9.1.1 REAL TIME COMPUTUER SYSTEM (RTCS)	109

9.1.2	DATA REDUCTION COMPUTER SYSTEM (DRCS)	110
9.1.3	ENGINEERING COMPUTER SYSTEM (ECS)	110
9.1.4	LAUNCH STATUS REVIEW SYSTEM (LSRS)	111
9.1.5	SPECIAL PURPOSE COMPUTERS	111
9.1.6	DIGITAL TELEMETRY FACILITY	111
9.2	OBTAINING DATA PROCESSING AND ANALYSIS SUPPORT	111
9.2.1	FLIGHT REQUIREMENTS PLAN (FRP)	111
9.2.2	INSTRUMENTATION (TELEMETRY)	112
9.2.3	NON-STANDARD USER REQUIREMENTS	112
9.2.4	POSITIONAL DATA POLICY	112
9.2.5	DATA DISSEMINATION	113
9.2.6	DATA RETENTION	113
<b>SECTION 10: WALLOPS FLIGHT FACILITY</b>		<b>114</b>
10.1	WFF SOUNDING ROCKET PROGRAM SUPPORT FACILITIES	116
10.1.1	ENGINEERING SUPPORT FACILITIES	116
10.1.2	PAYLOAD INTEGRATION LABORATORY	117
10.1.3	ENVIRONMENTAL TESTING LABORATORY	117
10.1.4	PAYLOAD CONSTRUCTION	118
10.1.5	COMPUTER SUPPORT	118
10.1.6	RANGE OPERATIONS	119
10.2	WORKING AT WALLOPS – RULES, REGULATIONS, AND LOGISTICS	120
10.2.1	ACCESS	121
10.2.2	ACCOMMODATIONS	121
10.2.3	WFF - SAFETY RULES AND REGULATIONS	123
10.2.4	SHIPPING/RECEIVING & TRANSPORTATION - SR COMPONENTS	123
10.3	FOREIGN NATIONALS	124

**APPENDICES**

<b>APPENDIX A:</b>	SCIENCE REQUIREMENTS DATA PACKAGE	127
<b>APPENDIX B:</b>	PRINCIPAL INVESTIGATOR'S DATA PACKAGE FOR MISSION INITIATION CONFERENCE (MIC)	131
<b>APPENDIX C:</b>	REQUIREMENTS DEFINITION MEETING (RDM) DATA PACKAGE	134
<b>APPENIX D:</b>	PRINCIPAL INVESTIGATOR'S DATA PACKAGE FOR A DESIGN REVIEW (DR)	140
<b>APPENDIX E:</b>	PRINCIPAL INVESTIGATOR'S DATA PACKAGE FOR A MISSION READINESS REVIEW (MRR)	141
<b>APPENDIX F:</b>	DESCRIPTIONS & FLIGHT PERFORMANCE CHARACERISTICS FOR NASA SOUNDING ROCKETS & SPECIAL PROJECTS LAUNCH VEHICLES	143
	F.1 BLACK BRANT V LAUNCH VEHICLE (21.XXX)	144
	F.2 TERRIER-MALEMUTE LAUNCH VEHICLE (29.XXX)	146
	F.3 IMPROVED ORION LAUNCH VEHICLE (30.XXX)	148
	F4 BLACK BRANT X LAUNCH VEHICLE (35.XXX)	150
	F.5 BLACK BRANT IX LAUNCH VEHICLE (36.XXX)	152
	F.6 BLACK BRANT XI LAUNCH VEHICLE (39.XXX)	158
	F.7 BLACK BRANT XII LAUNCH VEHICLE (40.XXX)	161
	F.8 TERRIER-IMPROVED ORION LAUNCH VEHICLE (41.XXX)	164
	F.9 TERRIER LYNX LAUNCH VEHICLE (42.XXX)	167
	F.10 TERRIER ORIOLE LAUNCH VEHICLE (45.XXX)	169
<b>APPENDIX G:</b>	PCM/FM AND FM/FM TELEMETRY SYSTEMS	171
	G.1 VECTOR MMP-900 PCM SYSTEM	171
	G.2 WFF93 ENCODER SYSTEM	172
	G.3 TELEMETRY: THE GLN-MAC INTERITAL ATTITUDE SENSOR	173
<b>APPENDIX H:</b>	COMPARISON AND PERFORMANCE OF VARIOUS BATTERY SYSTEMS	175
<b>APPENDIX I</b>	GSFC/WFF SAFETY DATA REQUIREMENTS	278

	PAYLOAD DESCRIPTION DATA/HAZARDOUS MATERIALS	178
	PAYLOAD DESCRIPTION DATA/RADIOACTIVE MATERIALS	179
<b>APPENDIX J:</b>	SOUNDING ROCKET LAUNCH RANGES	181
	J.1 U.S. ARMY WHITE SANDS MISSILE RANGE	181
	J.2 POKER FLAT RESEARCH RANGE	185
	J.3 ANDØYA ROCKET RANGE, NORWAY	188
	J.4 ESRANGE, SWEDEN	191
<b>APPENDIX K:</b>	WALLOPS FLIGHT FACILITY DIGITAL TELEMETRY SYSTEM (PDP11/60): DITES TAPE FORMAT	194
<b>APPENDIX L:</b>	RADAR DATA FORMAT	197
	<b>CHANGE HISTORY LOG</b>	198

## LIST OF FIGURES

FIGURE 2-1	TYPICAL SOUNDING ROCKET MISSION LIFE CYCLE	14
FIGURE 2.4-1	THE PFAFF PAYLOAD USED EXTENDED BOOMS TO INVESTIGATE SPORADIC E EVENTS IN THE IONOSPHERE	19
FIGURE 2.4.2	MENTORED BY NSROC STAFF, UVA STUDENTS BEGIN ELECTRICAL WIRING OF THEIR PAYLOAD AT WFF	19
FIGURE 3.2-1	NASA SOUNDING ROCKET LAUNCH VEHICLES	30
FIGURE 3.2.1-1	NASA SOUNDING ROCKET VEHICLE PERFORMANCE GRAPH	31
FIGURE 3.3.1-1A	S-19 BOOST GUIDANCE SYSTEM	33
FIGURE 3.3.1-1B	S-19 BOOST GUIDANCE SYSTEM	34
FIGURE 3.3.1-2	DS-19 BOOST GUIDANCE SYSTEM	34
FIGURE 5-1	PFAFF PAYLOAD 21.126 WITH BOOMS EXTENDED	40
FIGURE 5.1.1-1	TYPICAL WFF-93 PCM ENCODER	42
FIGURE 5.2.1-1	THE ST 5000 STAR TRACKER	43
FIGURE 5.2.2-1	GLN-MAC-200 INERITAL ATTITUDE SENSOR	44
FIGURE 5.4.1-1	NSROC(A) SUN SENSOR	47
FIGURE 5.18.2-1	NSROC INERTIAL ACS (NIACS)	67
FIGURE 5.18.3-1	NSROC MAGNETIC ACS (NMACS)	69
FIGURE 6.2.1-1	AIRDYNE MARK 8 MASS PROPERTIES MEASUREMENT SYSTEM	74
FIGURE 6.2.2-1	GISHOLT ROCKET BALANCING MACHINE AT WFF	74
FIGURE 6.2.3-1	LING ELECTRONICS B335 THRUST AXIS SHAKER AT WFF	76
FIGURE 6.2.4-1	PV/T VACUUM CHANGER AND TENNEY SPACE SIMULATION SYSTEM THERMAL VACUUM CHAMBER AT WFF	77
FIGURE 6.2.5-1	BEND TEST FIXTURE AT WFF	79
FIGURE 6.2.6-1	SPIN DEPLOYMENT CHAMBER AT WFF	80
FIGURE 6.2.7-1	GENISCO CENTRIFUGE MACHINE AT WFF	80
FIGURE 6.3.4-1	NEW OR MODIFIED PAYLOAD VIBRATION TESTING FLOWCHART	86
FIGURE 6.3.4-2	REFLY PAYLOAD VIBRATION TESTING FLOW CHART	87

FIGURE 8.3-1	RANGE FACILITEIS AT WOOMERA, AUSTRALIA	102
FIGURE 8.4-1A	RANGE SUPPORT OPERATIONS IN SONDRÉ STROMFJORD, GREENLAND	106
FIGURE 8.4-1B	EXTREME CONDITIONS: SONDRÉ STROMFJORD, GREENLAND	106
FIGURE 8.4-1C	OBSERVATIONS: NORTHERN LIGHTS AT SONDRÉ STROMFJORD, GREENLAND	106
FIGURE 8.4-2	BLACK BRANT IV PAYLOAD IN WOOMERA, AUSTRALIA	107
FIGURE 9.1.1-1	RTBC, TRCS IN OPERATION AT WALLOPS	109
FIGURE 10-1	WALLOPS FLIGHT FACILITY MAP	114
FIGURE 10-2	WALLOPS MAIN BASE	115
FIGURE 10-3	WALLOPS ISLAND	115
FIGURE 10-4	WALLOPS MAINLAND	116
FIGURE 10.1.2-1	PLASMA PHYSICS PAYLOAD DURING PAYLOAD INTEGRATION	117
FIGURE 10.1.4-1	WALLOPS FLIGHT FACILITY MACHINE SHOP – ELECTRICAL SECTION	118
FIGURE 10.1.4-2	A NOSE CONE IS STREAMLINED IN THE MACHINE SHOP	118
FIGURE 10.1.6-1	WFF FIXED RADAR SYSTEM	119
FIGURE F.1-1	BLACK BRANT V LAUNCH VEHICLE	144
FIGURE F.1-2	BLACK BRANT VC MK1 LAUNCH VEHICLE PERFORMANCE	145
FIGURE F.2-1	TERRIER-MALAMUTE (29.XXX) LAUNCH VEHICLE	146
FIGURE F.2-2	TERRIER-MALEMUTE LAUNCH VEHICLE PERFORMANCE	147
FIGURE F.3-1	IMPROVED ORION LAUNCH VEHICLE (30.XXX)	148
FIGURE F.3-2	IMPROVED ORION LAUNCH VEHICLE PERFORMANCE	149
FIGURE F.4-1	BLACK BRANT X LAUNCH VEHICLE (35.XXX)	150
FIGURE F.4-2	BLACK BRANT X LAUNCH VEHICLE PERFORMANCE	151
FIGURE F.5-1	TERRIER-BLACK BRANT IX LAUNCH VEHICLE	152
FIGURE F.5-2	TERRIER MK12 BLACK BRANT MK1 LAUNCH VEHICLE PERFORMANCE (WSMR)	153

FIGURE F.5-3	TERRIER MK12 BLACK BRANT MK 1 VEHICLE PERFORMANCE (SEA LEVEL)	154
FIGURE F.5-4	TERRIER MK70 BLACK BRANT MK 1 NIHKA VEHICLE PERFORMANCE	155
FIGURE F.5-5	TERRIER MK70 BLACK BRANT MK 1 VEHICLE PERFORMANCE (WSMR)	156
FIGURE F.5-6	TERRIER MK 70 BLACK BRANT MK 1 VEHICLE PERFORMANCE (SEA LEVEL)	157
FIGURE F.6-1	BLACK BRANT XI LAUNCH VEHICLE	158
FIGURE F.6-2	TALOS-TAURUS-BLACK BRANT MK 1 VEHICLE PERFORMANCE	160
FIGURE F.7-1	BLACK BRANT XII LAUNCH VEHICLE	161
FIGURE F.7-2	TALOS-TAURUS-BLACK BRANT MK1-NIHKA VEHICLE PERFORMANCE	163
FIGURE F.8-1	TERRIER IMPROVED ORION LAUNCH VEHICLE	164
FIGURE F.8-2	TERRIER-MK12-IMPROVED ORION LAUNCH VEHICLE PERFORMANCE	165
FIGURE F.8-3	TERRIER MK70-IMPROVED ORION VEHICLE PERFORMANCE	166
FIGURE F.9-1	TERRIER LYNX LAUNCH VEHICLE	167
FIGURE F.9-2	TERRIER LYNX LAUNCH VEHICLE PERFORMANCE	168
FIGURE F.10-1	TERRIER ORIOLE LAUNCH VEHICLE	169
FIGURE F.10-2	TERRIER ORIOLE MOTOR VEHICLE PERFORMANCE	170
FIGURE J.1-1	WHITE SANDS MISSILE RANGE	182
FIGURE J.2-1	AERIAL VIEW OF POKER FLAT RESEARCH RANGE	185
FIGURE J.3-1	LAUNCH FACILITIES AT ANDOYA ROCKET RANGE, NORWAY	189
FIGURE J.3-2	LAUNCH AT ANDOYA	190
FIGURE J.4-1	ESRANGE SWEDEN LAUNCH AREA	191

**LIST OF TABLES**

		PAGE
TABLE 3.1-1	SOUNDING ROCKET VEHICLE, AGENCY AND EXPERIMENT IDENTIFICATION	29
TABLE 3.3.1	NSROC BOOST GUIDANCE SYSTEMS	33
TABLE 5.1.2-1	PCM SYSTEM CHARACTERISTICS	41
TABLE 5.16.1-1	CHARACTERISTICS OF LAND RECOVERY PARACHUTES	58
TABLE 5.17-1	CHARACTERISTICS OF HIGH ALTITUDE DECELERATOR SYSTEMS	59
TABLE 5.18-1	ALTITUDE CONTROL/STABILIZATION SYSTEM CAPABILITIES	61
TABLE 5.18.1.2-1	SUN SENSOR CHARACTERISTICS	62
TABLE 6.2.3-1	NSROC SHAKER SPECIFICATIONS	75
TABLE 6.2.4-1	WFF VACUUM AND THERMAL VACUUM CHAMBER SPECIFICATIONS	76
TABLE 6.2.4-2	WSMR VACUUM AND THERMAL VACUUM CHAMBER SPECIFICATIONS	78
TABLE 6.2.5-1	NSROC BEND TEST FIXTURE SPECIFICATIONS	79
TABLE 6.2.8-1	INSTRUMENTATION AVAILABLE AT THE MAGNETIC TEST FACILITY	82
TABLE 6.2.8-2	MAGNETIC TEST FACILITY SPECIFICATIONS	82
TABLE 6.3.1-1	STATIC AND DYNAMIC BALANCE SPECIFICATIONS	85
TABLE 6.3.4-1	VIBRATION TEST LEVELS FOR NEW PAYLOAD DESIGNS	87
TABLE 8-1	NASA SOUNDING ROCKET LAUNCH LOCATIONS	93
TABLE 8.4-1	WFF LAUNCH FACILITIES	104
TABLE 8.4-2	WSMR LAUNCH FACILITIES	105
TABLE G.1-1	INDIVIDUAL PCM MODULE CHARACTERISTICS, MMP-900 PCM SYSTEM	171
TABLE G.2-1	INDIVIDUAL PCM MODULE CHARACTERISTICS-WFF93 PCM SYSTEM	172
TABLE G.3-1	GLN-MAC INERTIAL ATTITUDE SENSOR SPECIFICATIONS	174



TABLE H-1	COMPARISON AND PERFORMANCE OF VARIOUS BATTERY SYSTEMS	176
TABLE H-2	COMPARISON AND PERFORMANCE OF NI-CAD BATTERY SYSTEMS	177

(Please check the NSROC website: [WWW.NSROC.COM](http://WWW.NSROC.COM) to verify that  
this is the current version prior to use.)

## **SECTION 1: The NASA Sounding Rocket Program (NSRP)**

This Handbook was written to assist NSRP customers in developing payloads that meet the requirements necessary to achieve mission-specific, scientific objectives, and to serve as a guideline in defining NSRP quality standards and ISO 9001-2000 requirements. For the purposes of this document, “Customers” shall include principal investigators, program users, scientists, and experimenters.

### **1.1 The Program: 1959 – the Present**

The NSRP is a suborbital space flight program that primarily supports NASA-sponsored space and earth sciences research activities, other government agencies, and international sounding rocket groups and scientists. Since its inception in 1959, some 2800 missions have flown with an overall science mission success rate exceeding 86 percent and a launch vehicle success rate of over 95 percent. The program is a low-cost, quick-response effort that currently provides 20 - 30 flight opportunities per year to space scientists involved in upper atmosphere, plasma physics, solar physics, planetary atmospheres, galactic astronomy, high energy astrophysics, and micro-gravity research. These rockets are launched from a variety of launch sites throughout the free world.

In mid 1980, the NSRP was consolidated at the Wallops Flight Facility of the Goddard Space Flight Center. The program has continued to grow in terms of average payload size, weight, complexity, and range. NSRP flight systems are remarkably sophisticated spacecraft, capable of lofting 1000 pound payloads to 280 kilometers and 250 pound payloads to 1500 kilometers.

NSRP customers consist primarily of university and government research groups; however, some research activities involve the commercial sector. The program has contributed major scientific findings and research papers to the world of suborbital space science, validated satellite tracking and instrumentation, and served as a proving ground for space ship and space station components. Many new scientists have received training and developmental experience through NSRP internships and graduate study programs offered by participating educational institutions.

Systems and services provided to customers of the NSRP encompass the complete spectrum of support: mission management, payload design and development, launch vehicles, recovery systems, attitude control systems, payload testing and evaluation, analytical studies, launch range operations/coordination, tracking, and data acquisition and data processing.

Customers are required to provide the scientific instruments/detectors for the payload, a comprehensive description of the support requested from NASA, and objective criteria that will be used to determine the success or failure of the mission after all operations are completed.

The NSRP is conducted in compliance with ISO 9001-2000 but without the formal and expensive reliability and quality assurance employed in the larger and more costly orbital and deep space programs. This informal approach, combined with the extensive use of surplus military rocket motors, is instrumental in enabling the program to complete approximately 20 - 30 missions per year, using available resident WFF and WSMR resources. The NSROC program is required to maintain an 85% success rate (complete mission, vehicle, payload and science) although the program goal is 100%.

Effective communications between the NASA project support team and the customer are vital to the success of individual sounding rocket missions and to the overall program. Project meetings, reviews, and the requisite post flight assessments of mission results by the customer are all feedback mechanisms which provide observation, comment and constructive criticism for problem solving and future programmatic improvements. The NASA approach to team-customer interaction is included in this Handbook to foster a better understanding of the thinking behind current Program procedures. From design and development of the payload through launch and data retrieval, the customer is the essential source of information on how well the NSRP is working.

## **1.2 NASA Organizational Responsibilities**

NASA Headquarters program management responsibility for the Sounding Rocket Program is assigned to the Research Program Management Division (Code SR) of the Office of Space Science and Applications (OSSA) (Code S). The Code SR Director chairs the Suborbital Program Review Board; board members include representatives from the Earth Science and Applications Division and the Astrophysics, Space Physics, and Solar Systems Exploration disciplines of the Office of Space Science. A discipline specialist from the microgravity community is also on the Board. This board provides a forum for the review of the scope, balance and long term plans of the overall program, and formulates recommendations to the Associate Administrator, Office of Space Science and Applications relative to overall program content, budgets and programmatic issues. As a working element of the Suborbital Program Review Board, a Rocket Program Change Board deals with the scientific/technical assessment and feasibility of proposed missions, routine accommodation issues of flight approvals, specifications of annual fly-lists, priorities of approved missions and the review of program results. The Rocket Program Change Board includes the assigned Suborbital

Program Manager from the SR and Scientific Discipline Chiefs from the previously identified disciplines. Program progress, problems, and significant issues and events are reviewed by the Associate Administrator, OSSA, as part of a comprehensive monthly OSSA Program Review.

### **1.2.1 Program Management**

The NSRP at Goddard Space Flight Center (GSFC) falls under the Sounding Rockets Program Office (SRPO), Code 810, Suborbital and Special Orbital Projects Directorate (SSOPD), Code 800. The SRPO and SPOD are located at Wallops Flight Facility (WFF) Wallops Island, VA. The program is implemented under the NASA Sounding Rocket Operations Contract (NSROC) which is administered by the SRPO. NASA retains overall management of the NSRP including certain programmatic elements such as mission selection, funding, international agreements, grant administration, oversight and approval of the ground and flight safety process, and ownership of program assets.

### **1.2.2 Sounding Rocket Working Group (SRWG)**

The SRWG is appointed by the Director of Goddard Space Flight Center to provide counsel and a forum for exchange of information on sounding rocket systems, operational support, and developments in science as they affect the program. The NASA Sounding Rocket Project Scientist, GSFC, chairs the Group which consists of 11 members from the principal scientific disciplines served by sounding rockets. The NASA SRPO reports to this Group in the areas of technical and management support.

## **1.3 Sounding Rocket Program Customer's Role**

Once selected for flight participation, the customer becomes a member of the assigned Mission Team and is responsible for the preparation of the scientific experiment portion of the payload. Customers assist in establishing and conducting the operational program. Customers are responsible for defining the investigation, providing the necessary scientific instrumentation, completing timely processing and analysis of recovered data, and publishing the results. The customer is expected to participate in a number of scientific and technical planning functions and formal reviews described later in this document.

### **1.3.1 Philosophy**

The customer's role is critical to the success of the mission. NASA procedures are designed to support the customer and facilitate the best possible scientific return from the mission. Information regarding past experiences with the reliability of specific components and

techniques is made available. While the assigned mission support team may recommend the use or avoidance of certain procedures and practices, final decisions on the internal details of the scientific instrumentation are normally left to the customer. Each payload is required to successfully complete a series of environmental tests which measure, test and evaluate the ability of the scientific instrumentation to survive the flight environment. Determination of the ability of the scientific instrumentation to make the required measurements is normally made by the customer.

### **1.3.2 Payload and Instrumentation**

Equipment provided as part of the Program's customary mission support functions is described in Section 1.4 – Sounding Rocket Project Support Elements. The customer is normally responsible for developing and providing all other scientific instrumentation and related support equipment. They are also responsible for ensuring that it conforms to all required mechanical, thermal, and electrical interface specifications; meets all required safety standards; and is capable of surviving the predicted flight environment. Scientific instrumentation and related support equipment may be built within the customer's own laboratories or by associated contractors. To help ensure a safe operation, the customer is required to furnish the data specified in Section 7 - Safety and Appendix I - GSFC/WFF Safety Data Requirements.

## **1.4 Sounding Rocket Project Support Elements**

As the NSROC contractor, Northrop Grumman (NG) provides the programmatic, technical, and business management functions necessary to plan, organize, implement, control, track, report, and deliver the goods and services required for implementation of the NSRP. NG implements and reports their management functions to NASA through a comprehensive Integrated Management Plan (IMP) and an Information Management Support System (IMSS). The IMP reflects NG's corporate approach to accomplishing technical, safety, scheduling, cost, and business objectives in an efficient and effective manner. The IMSS provides online access to NSROC schedules, reports, documents, and archival information.

NG provides individual mission management for all assigned sounding rocket missions; this includes all planning and scheduling associated with individual mission requirements. Each mission is planned to meet science objectives and scheduled to avoid interference with the timely and cost efficient completion of other ongoing missions. The Mission Database is a programmatic schedule for all missions; it is maintained on the NSROC server.

At minimum, the Mission Database reflects the planned schedule for the following milestones:

- Launch Date
- Launch Time
- Integration Site/Date
- Mission Initiation Conference (MIC)
- Requirements Definition Meeting (RDM)
- Critical Design Review (CDR)
- Pre-Integration Review (PIR)
- Mission Readiness Review (MRR)
- Mission Close-out Report (MCR).

NG also provides services and supplies necessary for implementation of the individual missions and the overall program. As such, the contractor designs, fabricates, integrates, and performs flight qualification testing of suborbital payloads, provides launch vehicles, systems, and associated hardware, and provides various activities associated with subsequent mission launch operations. All relevant information is updated and maintained in the Mission Database.

#### **1.4.1 Program-Provided Support Services**

Customers of the Sounding Rocket Program are provided with a variety of support services. The assigned Mission Team is typically responsible for implementation of the mission utilizing their individual efforts and the extensive support capabilities provided by the Program.

A typical Mission Team is composed of the customer or his representative(s), applicable support staff, and additional team members provided by the support elements at WFF. A typical Mission Team includes the following positions:

- Mission Manager
- Customer & Staff
- Mechanical Engineer
- Electrical Engineer
- Instrumentation Engineer
- GNC (Guidance, Navigation & Control) Engineer
- Performance Analysis Engineer

- Mechanical Technician
- Electrical Technician
- GNC Technician
- Launch Vehicle Technician
- Flight Safety Representative
- Ground Safety Representative

The general categories of effort necessary for implementation of a mission include:

- Flight Mission Management
- Scientific Instrumentation (*typically provided by the customer*)
- Payload Analysis, Design, & Development
- Launch Vehicle and Payload Support Systems
- Payload Fabrication
- Payload Assembly/Integration, Testing, & Evaluation
- Launch & Flight Support Operations
- Post Flight Data Processing and Analysis
- Ground & Flight Safety.

The following is a brief description, including organizational responsibility, of the individual support elements provided by the Program for the typical mission. A detailed discussion of how sounding rocket flight projects are conducted with respect to a typical mission is included in Section 2 of this Handbook.

#### **1.4.1.1 Flight Mission Management**

NSROC management is generally responsible for selecting a Mission Manager (MM) for each mission. The MM has comprehensive, team leader responsibilities throughout the mission lifecycle and serves as the central point of contact for the customer. MM responsibilities include:

1. Developing an approach (technical, schedule, and cost effective), in conjunction with the assigned mission team, for meeting the mission requirements defined by the customer. This activity generally occurs in the period between the MIC and the RDM as described in Section 2 of this Handbook.
2. Coordinating and establishing a mutually acceptable date for holding, conducting, and documenting the RDM and all associated mission requirements in the subsequent Requirements Definition Meeting Memorandum.

3. Working with the customer and the NSROC Mission Team to design, develop, fabricate, integrate, test and flight quality the payload. The MM is responsible for coordinating, directing, and managing this effort, as well as establishing and maintaining the project schedule.
4. Directing and coordinating all Mission Team activities, including formal presentations at Design Reviews and Mission Readiness Reviews and documenting the Mission Team's responses to any action items resulting from these reviews.
5. Coordinating and directing all field operations including preparation of the launch vehicle and conducting launch operations. The MM is the focal point for all field activities and has final, real time go/no-go authority for the mission, including launch vehicle status (concurrence for launch by range safety and the customer is required). The MM has no authority to override a customer or range safety decision to halt a launch, but may stop a launch when, in his opinion, a condition exists that jeopardizes the success of the flight.
6. Assessing the results of the launch to the extent possible and submitting required reports to the SRPO.
7. Coordinating and directing post flight operations necessary to complete all mission requirements.

#### **1.4.1.2 Payload Analysis, Design, & Development**

The following activities are associated with the analysis, design, and development function and are generally provided by the NSROC contractor:

Electrical engineering support for payloads, launch vehicles, and associated flight systems includes electrical systems (power supplies, event timing, wiring harnesses, monitoring subsystems) and instrumentation systems (telemetry subsystems).



Mechanical engineering support for payloads, launch vehicles, and associated flight systems includes all payload mechanical subsystems (overall layout and design, external skins, internal structures, bulkheads, component layouts, special mechanisms) and pyrotechnic devices (pin-pullers, bolt-cutters and thrusters).

GNC engineering support for payloads and associated flight systems includes all boost guidance systems, navigation systems and attitude control systems. Support includes requirement review, auxiliary attitude sensor selection, implementation of external interfaces to the payload, pneumatic system propellant selection and thruster locations.

Flight performance analyses include:

- Launch vehicle performance and nominal flight trajectory analysis
- Flight trajectory dispersion, wind-compensation parameters, and impact aim point considerations
- Launch vehicle static and dynamic stability evaluation (including aeroelastic effects, payload dynamics analyses, payload re-entry trajectory and recovery analyses, ascent and re-entry aerodynamic heating analyses)
- Other suborbital analyses.

These activities are performed during the pre-flight and post-flight analyses for each mission.

#### **1.4.1.3 Launch Vehicle and Payload Support Systems**

Launch vehicle and payload support systems are provided by the NSROC contractor and include rocket motors, pyrotechnics, and associated inert standard flight systems such as ejectable nose cones, payload/vehicle separation systems, upper stage ignition systems, and thrust termination systems. Activities associated with these systems include their inspection, modification, storage, shipment, assembly, launcher mating, umbilical rigging, and environmental control during launch operations. Other standard systems include payload recovery systems, special aerodynamic decelerators, payload attitude control and stabilization systems, and launch vehicle boost-guidance systems.

#### **1.4.1.4 Payload Fabrication**

Mechanical and electrical fabrication services are provided by the NSROC contractor. Electrical fabrication support includes specialized shops for electrical wiring assembly, printed circuit board fabrication, and electrical instrumentation development. The mechanical fabrication support includes the machine shop, welding shop, plastics and composite materials shop, sheet metal shop, and mechanical instrumentation shop.

#### **1.4.1.5 Payload Assembly/Integration, Testing, & Evaluation**

The development of a mission progresses from the fabrication and assembly of flight hardware, through the addition of customer-provided instrumentation and standard support systems, to a fully integrated payload. The payload then proceeds through the testing and evaluation process which involves the entire Mission Team (engineering personnel, technical support personnel, and the customer who has the technical knowledge of, and responsibility for, his instrumentation) and the laboratory support personnel who operate the various facilities involved in the processes. These facilities include payload assembly shops, telemetry ground stations, and those associated with the testing and qualification processes. These processes include physical properties determination; magnetic calibration; and vibration, shock, structural loads, spin-deployment, dynamic balancing, and vacuum testing. All of these services are generally provided to the customer by the NSROC contractor.

#### **1.4.1.6 Launch and Flight Support Operations**

A critical element of conducting the NASA Sounding Rocket Program involves performing launch operations from various locations worldwide. Several of these launch sites are existing, full-time launch ranges. Mobile sites can also be established at remote locations which satisfy particular science requirements, such as specific observations (solar eclipses, supernova) and operations in specific areas (auroral zones, equatorial zones, Southern Hemisphere).

The following are brief descriptions of the major applicable elements involved in supporting sounding rocket flight operations:

- The SRPO utilizes an agreement with the NAVY at White Sands Missile Range to provide services for conducting launch operations from that location. The SRPO directs the NAVY to coordinate the provision of these services from the various service provider organizations and to support the specific requirements of each mission.
- The SRPO utilizes a contract with the University of Alaska for the maintenance and operation of the Poker Flat Research Range. This mechanism provides support for launch operations conducted from this high latitude location. Additional support for tracking and data acquisition services is provided through the NASA NENS contract.
- The SRPO also utilizes inter-governmental and international agreements necessary for the provision of launch operational support for mobile campaigns such as the recent 14-launch Kwajelein Campaign in Roi Namur, Marshall Islands; and from established foreign ranges such as Esrange, Sweden and Andoya, Norway.

- The Range and Mission Management Office (RMMO), Code 840 is responsible for planning and directing the support necessary to meet the objectives of projects conducted on the WFF range and mobile campaigns. The implementation of mobile campaigns for sounding rockets involves the support of several organizational elements within SPOD. Additional support may also be provided by the AETD.

The RMMO schedules and directs flight test activities, provides test data packages to users, and coordinates range operations with various outside organizations for operations conducted from WFF and mobile campaigns. When conducting a mobile operation of sufficient magnitude, a "Campaign Manager" is usually assigned. This individual has overall responsibility for managing the campaign (which usually involves several separate sounding rocket flight missions) including interfacing with foreign government organizations, establishing the required launch support facilities, and coordinating launch operations.

The range from which the operations are being conducted provides launch pads, launchers, blockhouse systems, controls, and consoles. Mechanical and electrical/electronic ground support equipment; flight support instrumentation such as search, tracking, and instrumentation radars; telemetry receiving and data recording stations; television and photographic tracking cameras; special purpose photo-optical equipment; surveillance and recovery operations aircraft; and facilities for payload preparation and check out are provided as part of the range services.

The NSROC contractor is generally responsible for conducting actual launch operations as well as all functions relating to the preparation of the launch vehicle and payload leading up to that event.

#### **1.4.1.7 Post-Flight Data Processing and Analysis**

The NSROC contractor is generally responsible for providing post flight processing and analysis of raw scientific data recovered from sounding rocket missions. This data is provided to the customer in the format specified at the RDM. Section 9 has additional information on available data processing and analysis support and procedures for obtaining that support.

#### **1.4.1.8 Ground and Flight Safety**

All work performed in support of the Sounding Rocket Program (SRP) is done in conformance with all WFF, GSFC, NASA, and other government regulations, requirements, and statutes. Ground and flight safety data requirements for sounding rocket vehicles and payloads are contained in the Range Safety Manual for Goddard Space Flight Center

(GSFC)/Wallops Flight Facility (WFF), (RSM-2002). This manual contains specific design requirements for flight systems and describes data that must be supplied to the Wallops Flight Facility Safety Office (Code 803) to obtain NASA safety approval for launch systems. Institutional safety requirements are contained in NPG 8715.3, NASA Safety Manual. The NSROC contractor is responsible for meeting these requirements as well as any additional safety requirements of other domestic or foreign ranges utilized during implementation of the SRP. Further, the NSROC contractor is responsible for maintaining awareness of all changes and modifications to statutes, regulations, and procedures impacting ground and flight safety.

The NASA Safety Office is responsible for oversight and approval of all ground and flight safety processes. As such, the NASA Safety Office provides all necessary Safety Plans based on the data and analyses provided by the NSROC contractor. The NSROC contractor is contractually required to provide all data, analysis, and information necessary for the development of these, and any other, required plans. The NASA Safety Office plans and coordinates safety aspects of launch operations, establishes range clearance and range safety limitations, and reviews and approves assembly and pad procedures. The NSROC contractor is responsible for implementing all of the requirements of the Ground and Flight Safety Plans for NSROC-supported missions.

For hazardous operations, the NSROC contractor is responsible for:

- Providing Operational Safety Supervisor(s) whose primary responsibility is safety oversight. This person or persons interfaces directly with the NASA Safety Office oversight authority in resolving real-time safety concerns.
- Implementing all general operation (crane operation, forklift operation, etc.), personnel safety (explosives and ordnance, pressure vessels and systems, chemical, radiation, etc.) and facilities (equipment calibration, maintenance of safety devices, access control) requirements.

A detailed discussion of sounding rocket safety considerations and policies is provided in Section 7 of this Handbook; additional NSRP support capabilities are addressed in Section 2.

## SECTION 2: The Sounding Rocket Flight Project

This Section describes the process NASA uses in conducting a sounding rocket flight project (mission) using the management and support elements at Goddard Space Flight Center's Wallops Flight Facility (WFF) discussed in Section 1.4.

From mission approval by NASA Headquarters through launch to completion, required meetings and reports are the primary means by which NASA and the customer track a mission's progress in meeting the schedule, problems encountered and corresponding corrective actions, and mission outcome. Meetings generally held for each Mission include:

- **Mission Initiation Conference (MIC):** The MIC is a meeting at which the NASA Sounding Rocket Program Office presents a new mission to NSROC to evaluate the probability of mission success, establish science objectives and define preliminary mission requirements for the Project Team. At this meeting, the PI Data Package (scientific objectives, instrumentation, engineering data, performance requirements, operational requirements and safety issues) will be presented and evaluated; and the intended launch date set.
- **Requirements Definition Meeting (RDM):** At the RDM, NSROC presents a Mission Plan that addresses each of the requirements presented at the MIC. The Mission Plan includes the vehicle configuration, mission schedule and a detailed requirements matrix.
- **Informal Mission Status Meetings:** Such meetings are held periodically during the course of a project to gauge progress, disseminate information, resolve issues, and maintain schedules.
- **Design Review (DR):** The Design Review verifies that the detailed design meets all requirements established at the RDM. All aspects of payload design are discussed and disseminated across all disciplines. Design parameters are summarized, design problems are addressed and resolved, and, should they be required, new designs are verified as complete and ready for fabrication.
- **Pre-Integration Review:** The integration and testing process for integration of the payload and the flight vehicle is reviewed. At this meeting, the payload, vehicle

elements, test plans/procedures, test equipment, facilities and personnel are thoroughly evaluated to ensure successful integration.

- **Pre-Shipment Review:** Verifies that the Integration and Testing process is complete and all shipping arrangements are in place. Range approvals, remote/mobile or foreign range logistics plans, license submittals, agreements for associated contractor range support, and the field operations plan are also reviewed to ensure that every facet of the launch has been prepared, documented, approved and verified prior to the Mission Readiness Review.
- **Mission Readiness Review:** This final check answers the question: Are we ready to launch? Has every system - telemetry, electrical, mechanical, environmental, range safety - been checked and double checked to ensure a successful mission? Based on this input, consent for launching is provided.

These meetings represent milestones in the overall project schedule. Each is treated as an important event. The major events that occur in the life cycle of a typical sounding rocket mission are shown in Figure 2-1.

## 2.1 The Mission Initiation Conference (MIC)

Flight projects must be approved by the appropriate science discipline chief at NASA Headquarters. Once this approval has been obtained, the customer will be contacted by the SRPO to establish a mutually acceptable date for a MIC between the customer and WFF personnel. The purpose of this first meeting is for the customer to present a MIC Data Package which details his requirements and specifies the support necessary for the mission. An outline of the information required in the MIC Data Package is provided in Appendix B.

The MIC is chaired and documented by the SRPO. Attendees include the customer, appropriate WFF supervisory and engineering personnel and NSROC supervisory, engineering, and technical personnel. A well-conducted and documented MIC will result in a strong foundation on which to begin the mission. The MIC provides the basis from which all requirements for the mission are established. These include:

- **Project Schedule:** An outline of all important project milestones will be developed at the MIC. These include pre-integration events, integration, testing, all planned reviews, shipping, range approvals, and a field operations schedule. The customer

should be prepared to answer specific and detailed questions regarding the scheduling of these milestones.

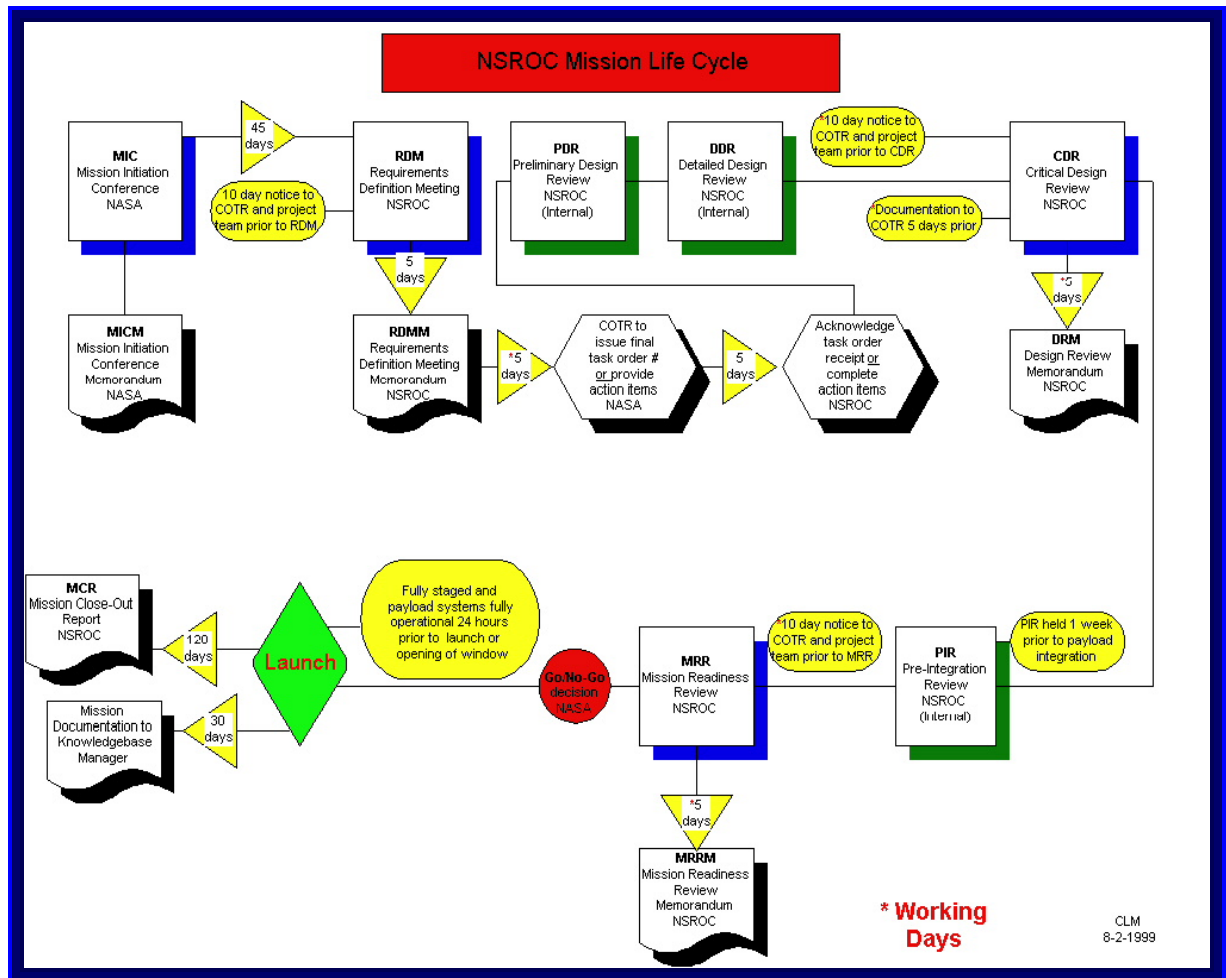


Figure 2-1. Typical Sounding Rocket Mission Life Cycle

- Mechanical Devices and Structural Elements:** The requirements for mechanical work will be discussed in as much detail as possible. Mechanical items of interest include deployable nose cones (standard or special), doors (access, deployable or retractable), extendible booms, antennas, sensors, and any unique structural items or payload skin requirements. Any temperature limitation, vacuum requirements, or mechanical devices/systems (despin, air, land and water recovery) should also be discussed.
- Flight Performance:** All payload flight trajectory/timeline requirements such as apogee, altitude, or time-above-altitude should be reviewed and requirements for payload dynamics (spin rate and/or coning limits) included. Some payload designs

involve long, flexible booms while others involve tethers and sub-payloads; dynamics requirements for this type of payload should be presented.

The best estimate of payload weight should be determined for the MIC, being careful not to eliminate any significant payload components. The flight performance characteristics of NASA sounding rocket launch vehicles are presented in Section 3 and Appendix F. An appropriate launch vehicle to meet scientific requirements can generally be selected at the MIC.

- **Instrumentation:** Experiment data requirements should be available at the MIC in sufficient detail to allow definition of the telemetry system for the payload. Experiment programming requirements (on-board timers, uplink commands, or special monitoring) should be discussed. A detailed description of standard instrumentation systems is included in Section 5 of this Handbook.
- **Attitude Control:** Attitude knowledge, control and stabilization of space science payloads are key elements in most science experiments. Attitude system requirements should be fully discussed to determine the type of Attitude Control System (ACS) required. The nature of celestial targets should be defined and any attitude maneuver sequences employed. Pointing accuracy and stability (jitter) should be specified. Known payload launch constraints are presented at the MIC. The types and capabilities of sounding rocket attitude control systems are presented in Section 5.
- **Navigation:** requirements frequently include detailed definitive knowledge of space/time during flight. Applicable requirements should be addressed in the MIC.
- **Data Reduction:** The customer can obtain assistance in data processing and analysis from WFF. Specific data reduction requirements should be discussed at the MIC. A description of WFF capabilities for data processing and analysis, and guidance on requesting support, is provided in Section 9.
- **Testing:** SRP testing policies are detailed in Section 7. In general, all flight payloads must be tested in accordance with the testing specifications. Any special testing concerns or requirements should be discussed at the MIC.



- **Action Items:** The responsibilities for all aspects of preparing a flight payload and conducting launch operations should be clearly established at the MIC. Action items and required suspense dates for each group at WFF supporting the Sounding Rocket Program will be established to ensure that the customer's objectives and requirements will be met on schedule

## 2.2 The Requirements Definition Meeting (RDM)

Following the MIC, the NSROC contractor develops mission concepts such as launch site, mission support requirements, payload complexity category, launch vehicle configuration, mission schedule (including fabrication, integration and testing, and post flight requirements schedules), target cost estimates, success criteria, recovery requirements, data product formats, and other pertinent mission defining elements. Within a period of 45 days from the MIC, the results of this process are presented at the second meeting in the Mission Life Cycle, the RDM. Initiated by the NSROC contractor, the RDM includes representatives from NASA and the customer. All information necessary to define and demonstrate the feasibility of the mission and how the mission requirements can be achieved will be presented at the RDM. A sample RDM Data Package is included as Appendix C of this Handbook.

A Requirements Definition Meeting Memorandum (RDMM) is documented by the NSROC contractor and provided to NASA within 5 days of the RDM. It serves as the contractor's task plan and documents mission technical requirements, the approach to satisfying those requirements, schedule, and cost information. NASA either concurs in the RDMM and issues a task to the NSROC contractor to support the mission, or provides action items to the contractor for resolution prior to issuance of the task.

## 2.3 The Design Review (DR)

A DR is held when a payload contains new equipment of a type that has not been flown before. A DR is also held if the payload is a new configuration that has not been flown before, even if the scientific instrumentation in whole or part is of existing design with previous flight history. The DR is generally waived if the mission is a direct reflly of an existing payload/vehicle configuration.

A DR may be requested by anyone who carries responsibility for the payload (the customer, NSROC contractor, or the SRPO). The objective of the DR is to discuss all aspects of the design, to establish design parameters, to define and elicit solutions to problems, and to make

all with responsibility aware of the current design plans. The design of the payload should be completed in order for a DR to be held. If this is not possible because of schedule constraints, the review should be held as soon as a design has been completed that is sufficient to allow a thorough review. NASA, NSROC, and customer representatives may attend the DR and assign action items as necessary

- **Pre-DR Process:** Should a DR be required, the following process is used to request, initiate, conduct, document and respond to action items issuing from it:
  - 1) The MM, in conjunction with the PI, schedules the Design Review and coordinates the Project Team's preparedness.
  - 2) The NSROC Contractor establishes a Design Review Panel that reviews all aspects of the mission, vehicle, design, test plan and integration activities. The Panel consists of NSROC personnel who are not directly involved with the mission but who have established expertise in the areas of technical support required for mission success. These include: Flight Performance, Mechanical Systems, Electrical Systems, Instrumentation Systems, Guidance, Navigation and Control Systems, Recovery Systems, Launch Vehicle Systems, and Ground and Flight Safety (NASA personnel).
  - 3) The NSROC Mission Manager formally announces the DR, specifying the subject flight mission, date, time, and place.
- **The Design Review Meeting:** During the DR, the Mission Team formally and systematically presents all information necessary to demonstrate that the proposed design and mission approach can meet all mission and safety requirements. The customer should be prepared to discuss all details of the scientific instrument design and interface with the support systems.

The PI Data Package for a Design Review can be found in Appendix D and includes:

- Complete mission and vehicle design information including all subsystems on the payload and vehicle.
- Complete descriptions of the proposed test plan for the complete payload and each system associated with the mission
- A listing of all procedures involving hazardous operations, safety-related issues, and assembly of the launch vehicle and payload.

- Procedures of any type involving hazardous operations or safety-related issues, which have not been approved by NASA Safety
  - Any new or revised procedures
  - A preliminary Flight Requirements Plan (FRP), which outlines requirements for range support, flight performance; data products, and field operations plans and schedules; the mission schedule is updated, if necessary, and any changes since the RDM are justified and documented.
  - A Design Review Panel formally reviews all analysis and design data. This panel is comprised of experienced colleagues from all the disciplines on the Mission Team. The Review Panel evaluates the mission requirements and ensures that all are met. The Panel also identifies risk and potential risk mitigation.
- **Post DR Process**
    - 1) After completion of the meeting, the panel reconvenes to discuss the results, and formulate and document action items that are provided to the MM for disposition.
    - 2) The Review Panel Chairman generates a Design Review Memorandum (DRM) which summarizes the meeting and documents all assigned action items. The DRM documents that the DR package and presentation demonstrated the proposed design and mission approach is capable of meeting the mission success criteria.
    - 3) The MM is responsible for directing the Mission Team in responding to DR action items. This effort is formally documented with a memorandum to the Design Review Panel Chairman.
    - 4) The Panel Chairman reconvenes the panel and reviews the responses to the action items. Any responses considered inadequate by the panel are reviewed by NSROC management with the MM, Panel Chairman, appropriate Mission Team member(s), panel members(s), and support area supervisor(s).
    - 5) All action items must be dispositioned (responded to by the Mission Team and approved by the Design Review Panel or NSROC management) prior to scheduling the Mission Readiness Review.

## 2.4 Payload Fabrication and Pre-Integration Testing

New mechanical and electrical hardware is fabricated in the shop facilities at WFF. Payload specific hardware is fabricated and assembled at WFF, with the exception of standard flight systems such as ignition/despin/separation systems, attitude control/boost guidance systems, recovery systems, and nose cones. Mechanical hardware is assembled and fit-checked prior to integration with scientific instrumentation provided by the customer. Electrical and telemetry instrumentation wiring and components are assembled and tested prior to integration with the customer's electrical/data systems to facilitate a smooth, trouble-free integration effort. Special pre-integration design qualification tests are often performed for new separation/ejection/deployment mechanisms, vacuum doors, and other devices. These special tests are in addition to the total payload post-integration testing that must be successfully completed before flight.



**Figure 2.4.1** The Very Complex Pfaff Payload Used Extended Booms to Investigate Sporadic E Events in the Ionosphere; Pfaff 21.126 Launched on 26 June 2001.



**Figure 2.4-2** Mentored by NSROC Staff, UVA Students begin Electrical Wiring of the Laufer 30.046 payload for the University's "first ever" launch, 27 April 2001.

## 2.5 Pre-Integration Review (PIR)

A PIR by the project team (Mission Manager, subsystem disciplines and science) occurs prior to payload testing and integration. The purpose of this meeting is to assess the Mission Team's readiness to support payload integration activities prior to authorizing travel by the customer or his staff. This serves to insure that the customer is not inconvenienced in having

to wait while WFF personnel complete preparation activities for support systems necessary for payload integration and visa versa.

## 2.6 Payload Integration and Testing

Payload integration and testing is comprised of a pre-integration checkout, payload integration, acceptance testing, and final checkout. When the final checkout indicates that all the subsystems operate as planned and are mutually compatible, the payload can be shipped to the launch site with confidence that only minor adjustments or calibrations will be necessary in the field.

Integration and testing of new payloads (except as described below) is usually conducted at WFF. General information concerning the integration and testing laboratories at WFF is presented in Section 10; Section 6 describes specific testing policies. Integration and testing of SPARCS payloads are performed at WSMR as these systems require special equipment that is resident only at that location. Section 6 provides a description of the facilities available for SPARCS payloads at WSMR

### 2.6.1 Pre-Integration Checkout:

Pre-Integration Checkout insures all parts and systems are available, have been assembled mechanically, and passed appropriate electrical functional test. The customer and Mission Team determine pre-integration checkout criteria; the MM insures that all appropriate pre-integration checks have been completed prior to scheduling payload integration activities. Pre-integration checkout activities for consideration in making this determination are listed below:

- **Attitude Control System (ACS):** Mechanical/electrical assembly completed  
Air Bearing test completed  
Vibration test completed  
System Acceptance Test completed  
Electrical/TM Functional test completed
  
- **Boost Guidance System (BGS):** Mechanical/electrical assembly completed  
System Acceptance Test completed  
Electrical/TM Functional test completed
  
- **Mechanical:** Fit check  
Load-bend test completed (new structures)

- **Vehicle:** Deployment/separation tests completed (new systems)  
Recovery system checked
- **Instrumentation:** Firing/despin module checked  
Battery requirements established  
Telemetry checkout complete  
Sensors/transducers calibrated  
GPS checked  
Timer verified  
Power-on checks completed  
Functional checks completed
- **Experiment**  
*(by the PI):* Assembly completed  
Calibration checks completed  
Functional checkout completed

### 2.6.2 Payload Integration:

Payload Integration is the first-time assembly of all the parts and pieces into the launch configuration. All aspects of the design and operation are checked including mechanical fit and operation, telemetry and electrical systems operation, and systems compatibility. Pre-testing sequence tests are performed to insure the event-programming system functions properly.

### 2.6.3 Acceptance Testing:

After successfully passing the payload integration checks, the assembled payload is taken to the Test and Evaluation (T & E) Laboratory where it is subjected to acceptance tests. Acceptance tests simulate some of the conditions the payload is likely to encounter in flight. Payload sub-systems that are required to operate in flight are functional during the acceptance tests. Every system must demonstrate the ability to survive flight conditions through completion of its intended function.

### 2.6.4 Waivers:

When special conditions or circumstances occur which warrant an exception to standard testing policies, the customer may submit a written request for waiver to the MM. The reason for the request, possible results if failure should occur during flight, and any other pertinent details should be stated in this request. Although waivers are infrequently required, they may be granted by NSROC management after consultation with all involved parties.

### **2.6.5 Final Checkout:**

After the payload has completed acceptance testing, it receives the final checkout which is essentially a duplicate of the payload integration checks described earlier. This process looks for defects in workmanship or other anomalies that may have been revealed as a result of the acceptance testing process.

### **2.6.6 Integration and Test Scheduling:**

All integration and testing schedules are prepared and coordinated by the MM. The integration and test facilities at WFF are in demand by many flight projects. Use of these facilities is usually scheduled several weeks ahead of the requirement; however, requests for immediate services may sometimes be accommodated. The customer should coordinate with the MM with respect to scheduling these activities and any special requirements while at WFF. The MM will interface with the Integration and T&E Laboratory supervisors regarding integration and testing activities. Mission Team members are responsible for documenting the integration activities and T&E results for presentation at the Mission Readiness Review where all problems encountered during integration and testing are thoroughly discussed.

### **2.7 Mission Readiness Review (MRR)**

The MRR is a formal review to determine if the mission is ready to proceed with launch operations with a high probability of meeting mission success criteria. All action items identified in the DR must be dispositioned (responded to by the Mission Team and approved by the Design Review Panel or NSROC management) prior to scheduling a MRR.

The MRR generally follows the same basic process as the DR. A Mission Readiness Review Panel, composed of a Chairman and other technically qualified personnel not directly involved with the flight project, is established by NSROC Management. Information presented at the MRR must demonstrate that all environmental testing and flight qualifications have been successfully completed, all required GSE and range support assets and services have been identified and scheduled in a detailed field operations plan, and that arrangements for the provision of all required GSE and range support assets and services have been completed. Problems encountered during integration and testing, including the adequacy of any modifications or repairs are reviewed. Information regarding procedures, similar to that presented at the DR, is provided; and a final FRP, which includes the detailed field operations plan and schedule, is included in the MRR documentation. The mission

schedule is updated and any changes in the design, test plan, procedures, or mission approach that have occurred since the DR are fully documented and justified.

The customer should be prepared to discuss all aspects of experiment hardware status, test results, and mission success criteria. A PI Data Package is required; format and content of this data package are provided in Appendix E.

Should Action items result from the MRR process, it is highly desirable that they be dispositioned prior to shipping payload hardware or travel of the Mission Team to the field. NASA, NSROC, and customer representatives may attend the MRR and assign action items as necessary. One major difference between the DR and MRR action items is that if the MRR action items are not addressed to NASA's satisfaction, NASA has the authority to halt launch operations until this requirement is met. As a final go/no go checkpoint, the SRPO issues written authorization to the NSROC contractor to proceed with launch operations after they are satisfied the requirement in question has been met.

If, at the MRR, it becomes evident that a major rework of the payload is required, a second MRR may be necessary.

## **2.8 Launch Operations**

Following payload integration, testing, and completion of the MRR, the sounding rocket project proceeds to the final major phase - launch operations. Sounding rocket launch operations are conducted from various launch sites worldwide. These vary from well-established launch ranges to barren temporary facilities outfitted with mobile equipment. A detailed discussion of launch operations at various domestic, foreign, and mobile launch sites is included in Section 8 and Appendix J. Section 10 has information regarding the range at WFF.

### **2.8.1 Flight Requirements Plan (FRP):**

Ninety days prior to arriving at the launch range, the NSROC contractor submits an FRP to the range detailing all support requirements the launch range must provide for launch and payload recovery operations. The launch range uses the FRP to plan and coordinate its support functions. The MM is responsible for ensuring that this document is accurate, complete, and timely. FRPs are used for launch operations at White Sands Missile Range, Poker Flat Research Range, and established foreign ranges. For launches at WFF, an Operations and Safety Directive is used in lieu of an FRP.



### **2.8.2 Operations and Safety Directive (OSD):**

Support requirements for launches at WFF are documented in the OSD and prepared by the Range and Mission Management Office (Code 840).

Sounding rocket launch operations at temporary launch sites are generally conducted as a campaign, with several rockets being launched while the range is in operation. In this case, the Campaign Manager will prepare an OSD that serves as the definitive document for describing all launch vehicle systems, payloads, and launch support activities.

### **2.8.3 Operational Safety:**

All aspects of sounding rocket launch operations which impact or deal with personnel hazards and overall safety concerns are considered in detail. The MM is responsible for ensuring that the Mission Team is in full compliance with all applicable safety policies regarding ground and flight safety during project launch operations. NASA Sounding Rocket safety policies and responsibilities are discussed in Section 7 of this Handbook.

## **2.9 Post-Launch Activities**

Immediately following a launch, the MM is responsible for providing a preliminary assessment of the results. The customer should assess the science results and report the overall status to the MM as soon as possible. In some cases, the payload must be recovered and returned for analyses before final science results to be determined. In the case of a flight failure, all recovered hardware is impounded by the NSROC contractor for inspection by cognizant personnel in a failure investigation. Post-Flight reports and conferences include:

### **2.9.1 The Quick Look Report:**

Immediately following a launch, the NSROC contractor issues a quick-look report. The quick-look report indicates apparent mission success or failure based on the best data available to the MM at that time.

### **2.9.2 Preliminary Post-Flight Report:**

Within a few days of a launch, the NSROC contractor submits a Preliminary Post-Flight Report to the SRPO. This report provides:

- All available preliminary flight results data:
- Any vehicle and payload systems problems encountered during flight
- A chronology and discussion of any problems or anomalies encountered during launch operations

### **2.9.3 Customer's Written Response:**

The customer is requested to provide a written response indicating the level of success or failure of the mission and any recommendations for improvements that the customer may suggest. NASA officially classifies the mission as a success or failure based on this input.

### **2.9.4 Post Flight Conference:**

Most established launch ranges conduct a post-flight meeting to review mission results. This conference gives the customer an opportunity to provide compliments or complaints concerning the field services provided; the input provides a "lessons learned" resource for future NSROC and range support service improvements.

### **2.9.5 Post Flight Data:**

A sounding rocket mission is not considered complete until all data requirements and post-flight reporting requirements have been satisfied. The customer's data requirements should be documented in the RDMM. Any changes that occur in these requirements during the progress of the mission should be documented in the DRM or MRRM. The MM is responsible for insuring that all data requirements are satisfied. Special data processing and/or analysis support can be made available. A discussion of available data processing and analysis capabilities is provided in Section 9.

## **2.10 Mission Success/Failure**

NASA sounding rockets have maintained a historical success rate of 87 percent. A successful flight is defined as one that meets the minimum success criteria. When the minimum success criteria for any given flight are not met, the flight is officially considered a failure. All sounding rocket flight failures are formally investigated to identify the cause(s) of the failure so that appropriate corrective action(s) can be taken. If the failure is caused by a problem with scientific instrumentation or associated hardware provided by the customer, the customer is responsible for determining the cause(s) and taking corrective action(s) prior to re-flight. Technical assistance and consultation can be provided to the customer as necessary. Upon completion of the failure investigation, the customer is requested to provide the findings, conclusions, and corrective action(s) to NASA through the Chief, SRPO.

The NSROC contractor is responsible for identifying anomalies, failures, and systemic problems with flight vehicle systems, payload systems, GSE, and analytical methods they employ in support of the NSRP. All direct and contributing causes of anomalies, failures, and systemic problems are investigated, resolved, and fully documented with corrective action being identified and implemented in a timely manner. NASA reserves the right to

observe and/or participate in contractor-staffed anomaly and failure investigations and to conduct independent investigations.

### **2.10.1 Anomaly Investigation Board (AIB):**

An AIB is composed of individuals selected for their expertise in areas related to the failure. The customer (or his representative) may be requested to serve on an AIB. The team will, in some cases, issue preliminary findings and recommendations regarding pending missions that may be affected by similar problems. Launch operations for these missions may be postponed until a resolution of the problem has been achieved. A formal, final investigation report is issued as soon as possible following completion of the investigation.

### **2.10.2 In-Flight Anomalies:**

In some cases, problems occur during flight with payload sub-systems that result in abnormal payload operations but do not result in a mission failure. Likewise, the launch vehicle can exhibit abnormal performance characteristics, but still provide an adequate flight trajectory for satisfying the minimum requirements for scientific success. In these cases, the overall mission is termed a success, and the abnormal occurrences are considered in-flight anomalies. In-flight anomalies that lead to a mission failure are always considered major occurrences that require formal investigation. For major anomalies (generally those which, should they recur, have the potential to jeopardize the success of future missions), an Anomaly Investigation Board is appointed.

### **2.10.3 AIB Action Item/Recommendation Implementation Team:**

This Team consists of experienced individuals from each major technical support area. Its primary responsibilities are:

- Review of each recommendation made by the AIB
- Assessment of each recommendation with respect to applicability to the problem and overall programmatic impact.
- Determination as to whether or not the action items and/or recommendations of the Anomaly Investigation Board are implemented.

All mission failures are input into the GSFC non-conformance reporting system; corrective actions are implemented, as required. AIB reports are routinely provided to the customer of the associated mission and to NASA Headquarters.

### **2.11 The Mission Close-Out Report (MCR)**

The MCR fully documents the mission's success or failure. It includes a detailed assessment of the mission and a cost summary; and officially closes out the process.

## **SECTION 3: Sounding Rocket Launch Vehicles and Performance Capabilities**

A family of standard sounding rocket launch vehicles is available in the NASA Sounding Rocket Program for use in conducting suborbital space science, upper atmosphere, and other special applications research. Some of the vehicles are commercially available; others have been developed by NASA for exclusive use in NASA programs. These vehicles are capable of accommodating a wide variety of payload configurations and providing an extensive performance envelope.

### **3.1 NASA Mission Designation System**

NASA sounding rocket launch vehicles are identified by a numbering system. The first two digits of the flight mission number identify the type of launch vehicle used. The remaining three digits indicate the mission number for that particular launch vehicle type. The first and second letters following the digits identify the type of organization sponsoring the mission and the scientific discipline of the experiment, respectively. Table 3.1-1 lists the specific vehicle numbering system as well as the agency and experiment type. Table 3.1-1 also has an example Flight Mission Number.

### **3.2 NASA Sounding Rockets**


There are currently eleven operational support launch vehicles in the NASA Sounding Rocket Program. All NASA sounding rocket launch vehicles use solid propellant propulsion systems. Extensive use is made of 20 to 30-year-old military surplus motors in 10 of the systems. All vehicles are unguided except those which use the S-19 Boost Guidance System. During flight, all launch vehicles are imparted with a spinning motion to reduce potential dispersion of the flight trajectory due to vehicle misalignments. Outline drawings for these thirteen vehicles and their NASA vehicle numbers are presented in Figure 3.2-1 on the following page.

#### **3.2.1 Performance Characteristics**

Performance characteristics for apogee altitude and weight capability and flight time above 100 kilometers for NASA sounding rocket vehicles are included in Figure 3.2.1-1. This data is presented for a sea level launch using a launch elevation angle of 85 degrees. Appendix F has detailed descriptions and flight performance characteristics for these vehicles.

<b>Table 3.1-1. Sounding Rocket Vehicle, Agency, and Experiment Identification</b>	
<p><b><u>NASA Vehicle Numbers</u></b></p> <p>(12) Special /Development Test Vehicles</p> <p>(21) Black Brant V</p> <p>(29) Terrier-Malemute</p> <p>(30) Improved Orion</p> <p>(35) Black Brant X</p> <p>(36) Black Brant IX (Terrier Black Brant VC)</p> <p>(39) Black Brant XI</p> <p>(40) Black Brant XII</p> <p>(41) Terrier Improved Orion</p> <p>(42) Terrier Lynx</p> <p>(45) Terrier Oriole</p>	<p><b><u>Type of Organization Sponsoring Mission</u></b></p> <p>A Government Agency other than D or N</p> <p>C Industrial Corporation</p> <p>D Department of Defense</p> <p>G Goddard Space Flight Center</p> <p>I International</p> <p>N Other NASA Centers</p> <p>U College or University</p>
	<p><b><u>Type of Experiment</u></b></p> <p>E Geospace Sciences</p> <p>G V/Optical Astrophysics</p> <p>H High Energy Astrophysics</p> <p>L Solar System Exploration</p> <p>M Microgravity Research</p> <p>O Student Outreach</p> <p>P Special Projects</p> <p>S Solar and Heliospheric Sciences</p> <p>T Test and Support</p>

<b><u>Example of Mission Number: 33.035UE</u></b>			
33	.035	U	E
Taurus-Orion	35 <sup>th</sup> Assigned Mission	College or University	Geospace Sciences

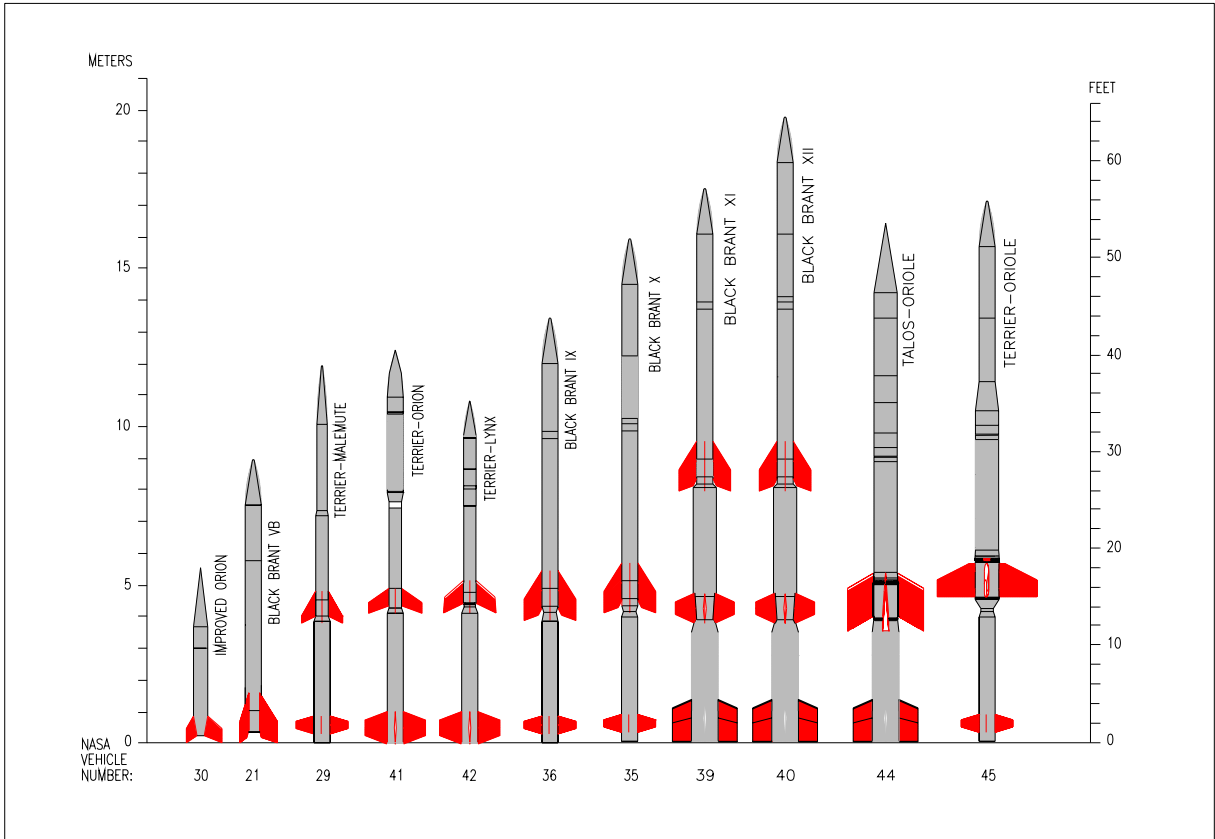

**Figure 3.2-1 NASA Sounding Rocket Launch Vehicles**

Sounding Rocket Vehicle Performance

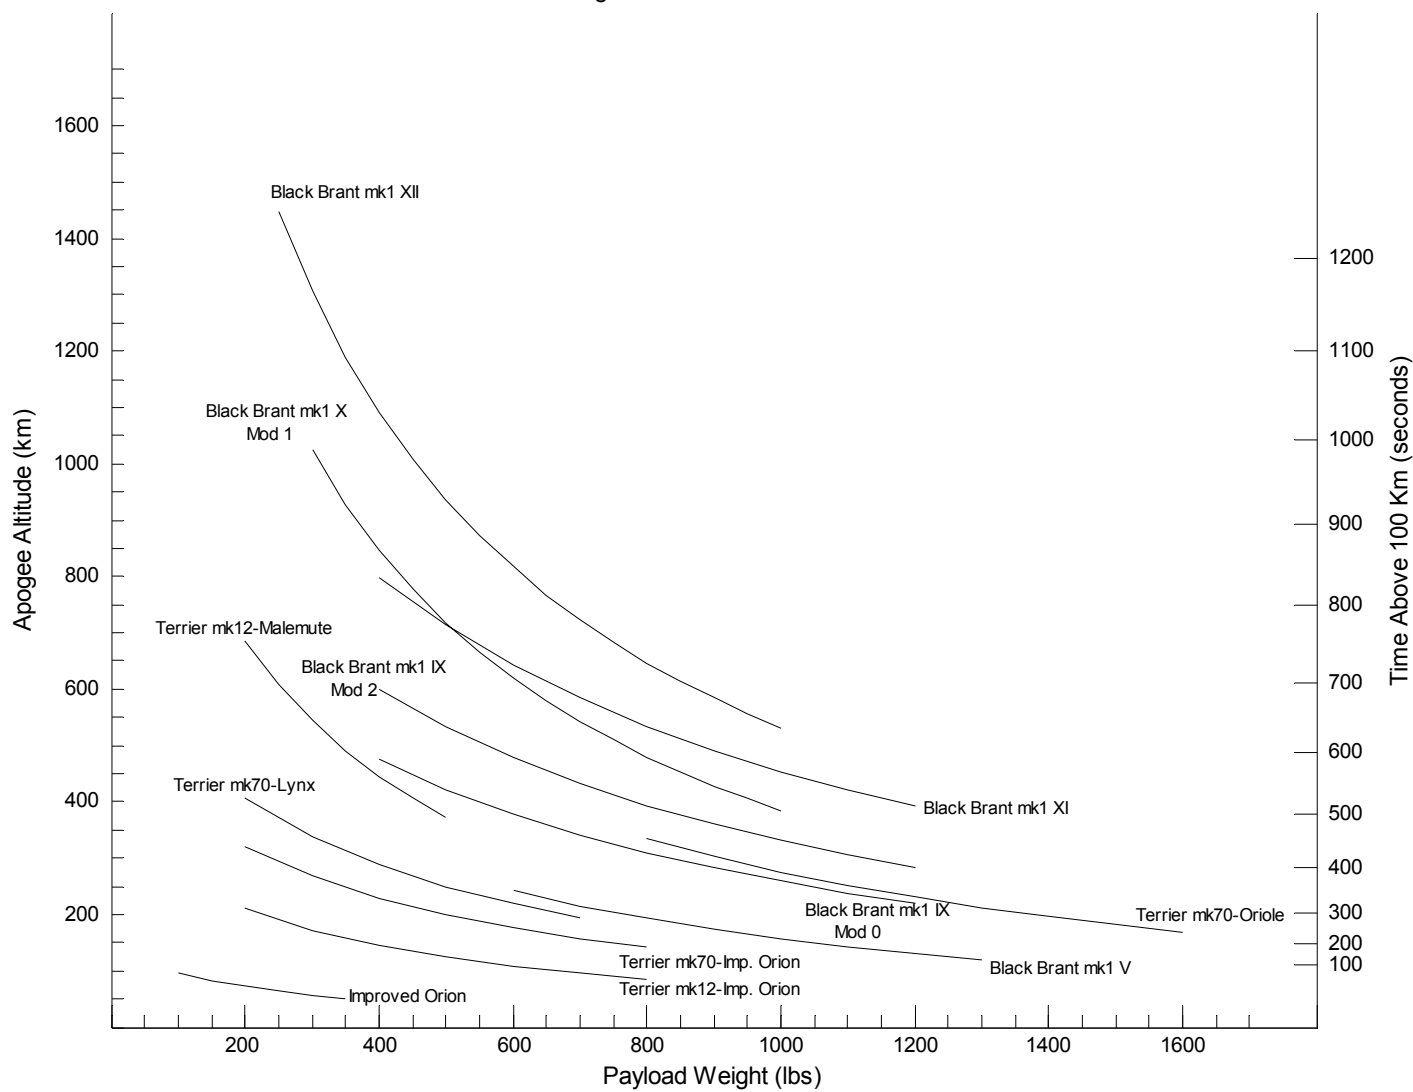


Figure 3.2.1-1 Sounding Rocket Vehicle Performance



### **3.3 Boost Guidance Systems (BGS)**

The Boost Guidance System is designed to reduce impact dispersion and to acquire accurate trajectories; the system is applicable to several sounding rockets. BGS unique capabilities make it possible to launch sounding rockets to higher altitudes and in higher winds while maintaining tolerable trajectory dispersion. Compared with a fin-stabilized, unguided rocket, a trajectory impact point dispersion reduction factor of 5-10 (depending on the detailed conditions) can be expected.

NSROC uses the S-19 family of Boost Guidance Systems developed by SAAB Ericsson Space. The basic S-19 is an analog system using the Space Vector MIDAS mechanical attitude gyro which is no longer in production. The basic S-19 provides only launch rail attitude hold guidance for approximately 18 seconds. A digital system, the DS-19, has been developed and the first flight occurred in 1999. The DS-19 incorporates inertial impact point (IIP) guidance and is capable of guiding for a much longer time, providing control throughout the time that sufficient dynamic pressure for control is available. However, range safety considerations and lack of an automated flight termination system at White Sands Missile Range preclude its use in the IIP mode. At White Sands, the DS-19 is restricted to the basic S-19 launch rail attitude hold guidance mode, and in this configuration it is designated the S-19D. The DS-19 or S-19D use the DMARS digital attitude reference system incorporating accelerometers and mechanical gyros.

SAAB is currently incorporating the GLN-MAC-gimbal-mounted inertial measurement unit into the S-19 series BGS. This upgrade, which will be known as the S-19G, will be available in 2006. Although the GLN-MAC has accelerometers on board and the system has the necessary sensors to compute an IIP, the initial operational capability will only provide launch rail attitude hold capability equivalent to the S-19D.

Table 3.3.1 describes the Boost Guidance Systems currently available.

#### **3.3.1 Operation of the S-19/D/G Boost Guidance Systems**

The S-19 guidance system is a constant attitude control system. The vehicle pitch and yaw angles are detected by a gyro platform (MIDAS, DMARS, or GLN-MAC) that produces corresponding output signals. These signals are processed in an auto-pilot and, after roll resolving, are used as servo command signals. There is no active roll control. Each servo turns a pair of canards, thus achieving vehicle aerodynamic control. The four

canards are mounted in pairs on two orthogonal shafts. Each pair of canards is deflected by a pneumatic servo that is supplied with nitrogen or air from a pressure vessel.

**Table 3.3.1 NSROC Boost Guidance Systems**

	<b>S-19/D/G Family Rail Attitude Hold</b>	<b>DS-19/GS-19 Family Integrated Impact Point</b>
Guidance Scheme	Guides to a specific attitude specified by the launch rail QE and AZ  Canards decouple at t + 18 seconds.	Guides to a preprogrammed IIP and continually updates throughout the burn phase  Canards decouple at t + 45 seconds
Dispersion Specifics	Impact dispersion (3s theoretical)  Down Range = 7.5% of apogee  Cross Range = 7.5% of apogee	Impact dispersion (3S theoretical)  Down Range = 2% of apogee  Cross Range = 1.2% of apogee
Onboard Sensor(s)	S-19: MIDAS roll stabilized gyro platform (position gyros)  S-19D: DMARS Inertial Measurement Unit (rate gyros, accels)  S-19G: GLN-MAC-200 incorporating roll gimbal mounted LN-200 Fiber Optic Gyro	DS-19: DMARS Inertial Measurement Unit (rate gyros, accels)  GS-19: GLN-MAC-200 (software not yet available for IIP computation).

A guidance system operates during the first 18 seconds of flight. Figures 3.3.1-1a and 3.3.1-1b are photos of the S-19 Boost Guidance System. Figure 3.3.1-2 is a photo of the DS-19 Boost Guidance System.



**Figure 3.3.1-1a: S-19 Boost Guidance System**



**Figure 3.3.1-1b: S-19 Boost Guidance System**



**Figure 3.3.1-2 DS-19 or S-19D Boost Guidance System**

## Section 4: Sounding Rocket Payload Design Considerations

The sounding rocket payload must achieve the scientific objectives of the customer while functioning within the mechanical, electrical and environmental parameters of a sounding rocket. Consequently, the Principal Investigator (PI) and his support staff must work closely with the NSROC mission team to ensure that all mechanical and electrical design elements are fully integrated and proper interfaces between all payload subsystems established.

### 4.1 Payload Design

Sounding rocket payloads are designed to accommodate extremely diverse scientific objectives. As a result, individual payloads vary greatly in design characteristics and requirements. However, most payloads generally consist of the following subsystems that require coordination in the design phase:

- Scientific Instrumentation
- Mechanical Systems
- Electrical Systems
- Event Timing/Programming
- Pyrotechnic Devices
- Telemetry Systems
- Attitude Control System
- Recovery System
- Boost Guidance Systems

The payload may also include sustainer ignition, separation, and despin systems. In general, however, these functions are provided by standard modules that are designed to interface with a variety of standard sounding rocket launch vehicles.

Sounding rocket payloads must endure a relatively hostile flight environment during the rocket boost phase of flight. NASA has extensive experience in the flight environment and other factors which influence effective payload design. This Section describes many factors to be considered in payload design and construction to help ensure a reliable, safe, productive, and cost effective payload.

A well designed piece of equipment will pay dividends throughout its lifetime in reliable operation and ease of servicing and handling. However, the PI will normally have to make some tradeoffs in equipment design since many of the design factors are interdependent. It is axiomatic that a flight-proven design is likely to be more quickly available and more reliable than a new design. Always make sure there is no existing design that is adequate before a

new design is undertaken with its inherent burdens of design qualification testing, debugging, and possible modifications.

## **4.2 Flight Performance**

The environment for rocket payloads may prove hostile to the proper mechanical, electrical, and aerodynamic functioning of the payload. The controlled environment for payloads on earth abruptly changes at launch. Great variations in temperature, acceleration, atmospheric pressure, vibration and other extreme conditions are encountered. The specific flight environment for any given flight demands consideration in the design and construction of successful payloads.

### **4.2.1 Mechanical Loads and Vibration**

The longitudinal and lateral loads imparted due to rocket motor thrust, aerodynamics, winds, spin rates and abrupt changes in spin rate due to despin devices are major design considerations. Longitudinal acceleration levels depend on the specific type of launch vehicle used. Unguided sounding rocket launch vehicles fly with a spinning motion to reduce the flight trajectory dispersion due to misalignments. Most vehicles do not exceed 6-7 cycles per second (cps). The effects of spin-induced loads should be considered when components are mounted off of the spin-axis. Load factors exceeding 30 g's can be experienced by components mounted near the payload external skin for large diameter designs. Most electronic devices utilize relatively small, lightweight circuit boards and components. When soldering is properly performed, and a conformal coating applied, problems caused by mechanical loads are very infrequent.

Another major flight environment factor is the vibration induced by rocket motor burning and aerodynamic loading. The vibration environment depends on the type of launch vehicle and the mass and structural characteristics of the overall payload. Vibration testing is one of the key elements involved in qualifying a payload for flight; all payloads must pass flight acceptance vibration tests.

Vibration test specifications are a function of the type of launch vehicle used. Vibration transmission problems and generally thin sections can create excessive motion of sensitive electronic parts. Components supported by their leads are vulnerable to failure from vibration. Close spacing of components to each other or mechanical structures require rigid attachments to prevent abrasion and subsequent shorting. A detailed description of vibration testing policies and specifications is included in Section 6.

#### **4.2.2 Thermal Considerations**

Typically, sounding rocket launch vehicles reach very high speeds traveling through the earth's atmosphere. Surface heating at hypersonic speeds is significant due to the friction encountered while flying through the air mass; atmospheric heating is encountered when a payload re-enters the atmosphere from space. Even though payload exterior skin surfaces experience relatively high temperature rises due to ascent aerodynamic heating, the temperature of internal components does not vary greatly over the course of a typical flight. This factor depends primarily on where and how components are mounted relative to the payload skin. Heating of electronic components due to operation over long time periods (during preflight check-out) can be more severe. While the payload temperature may remain fairly constant during flight, hot spots within the equipment may develop if the vacuum of high altitudes impedes the heat flow from components. Specially designed heat paths may be required to ensure overheating does not occur. Specific heating analyses can be performed as a part of the overall mission analysis for any given mission; design personnel at WFF have accumulated significant historical data through experience and actual measurements of the thermal environment encountered during sounding rocket flights. If a particular component is sensitive to elevated temperatures, it may have to be insulated or isolated from heat sources.

#### **4.2.3 Vacuum and Out-Gassing**

When rocket payloads rapidly ascend in the atmosphere during launch, ambient atmospheric pressure drops quickly to essentially zero. Payloads are generally designed to vent internal air. Barometric switches are often utilized for switching functions in payload electrical subsystems. Some types of payload components may not tolerate low atmospheric pressures; if the experiment must be subjected to vacuum, be aware of good vacuum design practices. Avoid contamination crevices and lubrication problems. Many devices can withstand vacuum, but vacuum plus elevated temperature is much more difficult to survive.

The most common undesirable effects of vacuum are reduced heat transmission and corona; both are relatively easy to overcome if they are recognized early. Another design consideration which can degrade data is out-gassing. Check materials used for lacings, insulation and tapes. WFF can advise on suitable materials and techniques to minimize out-gassing.

In many cases, portions of payloads require hermetically sealed joints or doors to maintain sealed conditions either under pressure or vacuum. WFF has designed and developed numerous types of hardware for sealing purposes.

#### **4.2.4 Aerodynamic Design Factors**

A design that involves any protuberance or change in the rocket skin shape should be evaluated for aerodynamic heating, drag, or stability problems that may result from these changes. A major element in overall mission analysis is the evaluation of launch vehicle stability (both static and dynamic). The payload configuration and structural bending characteristics must be adequate for acceptable flight parameters to be satisfied. Flight worthiness should be established during the initial design process; final mission analysis results are presented at the Mission Readiness Review.

### **4.3 Other Payload Design Considerations**

Other factors which influence successful design practice include:

#### **4.3.1 Accessibility**

Accessibility is frequently overlooked. Reset devices, battery packs, film holders, lens covers, filling connections, and cable connections should be located to facilitate replacement or removal.

#### **4.3.2 Availability of Parts**

If required parts are not “in stock,” procurement delays may impact timely completion of the experiment. Never base a design on a part listed in a stock catalog or stock list; always ensure the parts you require are available. Long lead-time items and sufficient spares should be identified and ordered early in the design processes. Avoid designs based on parts that are inaccessible or parts with very limited replacement options.

#### **4.3.3 Dynamic Balance**

Designing a balanced payload may save balancing weights. A favorable center of gravity location can increase rocket stability and provide an acceptable re-entry body for recovery considerations.

#### **4.3.4 Cost**

The cost of each item should be examined (parts machined from solid stock versus formed, welded, or cast). Excessively close tolerances on dimensions should be avoided. Let experience and judgment be the guide in purchasing electronic components; although, reliability may not go hand-in-hand with cost, "bargain basement" parts should be avoided.

#### **4.3.5 Redundancy**

Redundancy is most desirable; although it is not usually as easy to attain in mechanical equipment as in electrical circuitry, it should always be considered. Redundancy may often

be obtained by separate battery packs, multiple means for turn-on or turn-off, and other techniques.

#### **4.3.6 Weight**

Depending on the capability of the vehicle and altitude requirements, weight may be a very serious problem. Determine as early as possible if there is a weight problem so measures can be taken to minimize it. Performance capabilities of NASA sounding rockets are covered in Section 3 and Appendix F.


#### **4.3.7 Testing**

Make the experiment cost effective and efficient to test, calibrate, and debug by providing adjustments, test connections, and supports. Test points in electronic circuits should be standard practice.



## SECTION 5: Payload Systems

Payload systems support the experimental payload by providing for telemetry data acquisition, tracking, power, timing, protection, mechanical configuration, stability, and recovery. The effective design and integration of payload systems is one of the most important challenges to a successful mission. Figure 5-1 is an example of a complex payload system undergoing final checkout. Designed for a GSFC Space and Plasma Physics experiment, this payload features an attitude control system, boom mounted sensors which deploy during flight, a recovery system, and data transmission features. Payload system capabilities are extremely important to the success of the overall mission.

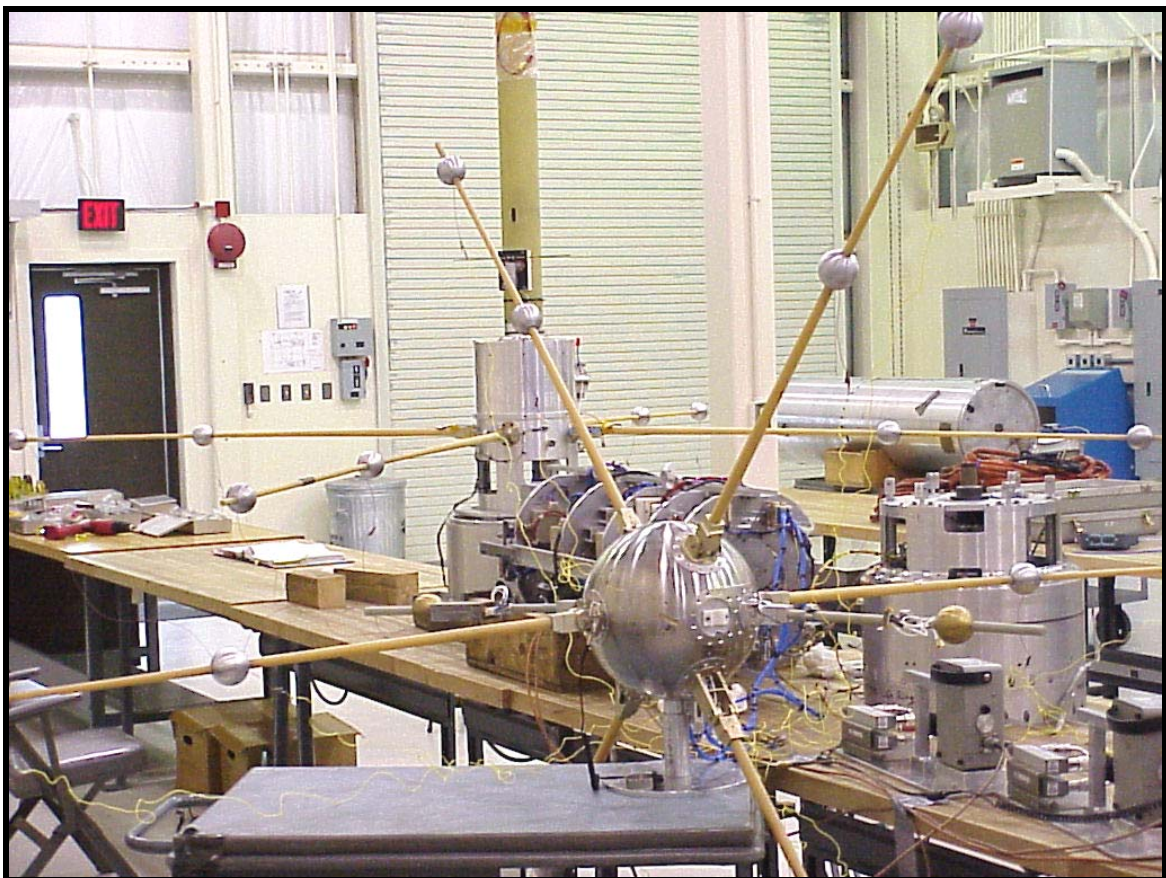

**Figure 5-1. Pfaff Payload 21.126 with Booms Extended**

### 5.1 Telemetry Systems

Telemetry is the primary means of obtaining data from sounding rockets. The instrumentation system provided to the Principal Investigator (PI) depends upon the complexity of the experiment, the configuration of the detectors, and the size of the rocket. In some cases, a separate instrumentation package is best; in other cases, the instrumentation

and detectors are fully integrated in the same housing(s). In either case, the instrumentation provides a means of formatting and transmitting the scientific and housekeeping data, provides control signals to the experiment, provides timing, and provides power if desired. Systems vary in complexity from a single link with no command or trajectory equipment to systems containing as many as eight down-links, command, and trajectory hardware. Almost all systems operate with S-Band (2200 to 2300 MHz) down-links although 1680 MHz is occasionally used for the down-links on some of the smaller rockets. Systems incorporating command uplinks use 437.5 MHz for the uplink frequency.

**5.1.1 Data Transmission Systems**

Digital techniques are the predominant methods of transmitting data from a sounding rocket to the ground station in the NASA Sounding Rocket Program. Randomized Non-Return to Zero (RNRZ) or Bi-phase (Bi-ΦL) Pulse Code Modulation/Frequency Modulation (PCM/FM) is the basic system employed. Figure 5.1.1-1 shows a typical PCM encoder flown on sounding rockets. Note: Since 2000, no FM/FM or hybrid (PCM + VCO) data system has been flown.

**5.1.2 PCM/FM Systems**

Two different types of PCM telemetry systems are currently used for NASA sounding rocket payload data requirements: the Vector MMP-900 System and the WFF 93 System. Table 5.1.2-1 compares the characteristics of these two systems. Additional descriptive and technical details are included in Appendix G.


**Table 5.1.2-1: PCM System Characteristics**

	<b>Bit Rate</b>	<b>Word Length</b>	<b>Frame Size</b>	<b>Parity</b>	<b>Output Code</b>	<b>Frame/ Subframe</b>
WFF93	78kb to 10 Mb	8 - 16	Up to 8k words	None	BIΦL, M, S NRZL, M, S RNRZL Conv NRZM Conv NRZL	Limited to 8k
MMP 900 PCM	6.25, 12.5, 25, 50, 100, 200, 440, 800 kbit	8 9 10	2 to 256	Odd or None	BIOL, M, S NRX-L, MS	2 to 32

**5.1.3 WFF93 PCM Encoder System**

This system is the newest available PCM encoder hardware used in support of the NASA Sounding Rocket Program. The WFF93 PCM encoder is a general purpose, versatile, re-configurable high rate PCM telemetry system for use where system requirements are subject

to change. The format structure is configured by a software program designed for the PC environment. The hardware is configured as a stack up system with various data modules, which can be added as required. A more detailed description and module characteristics of the PCM Encoder System is included in Appendix G.

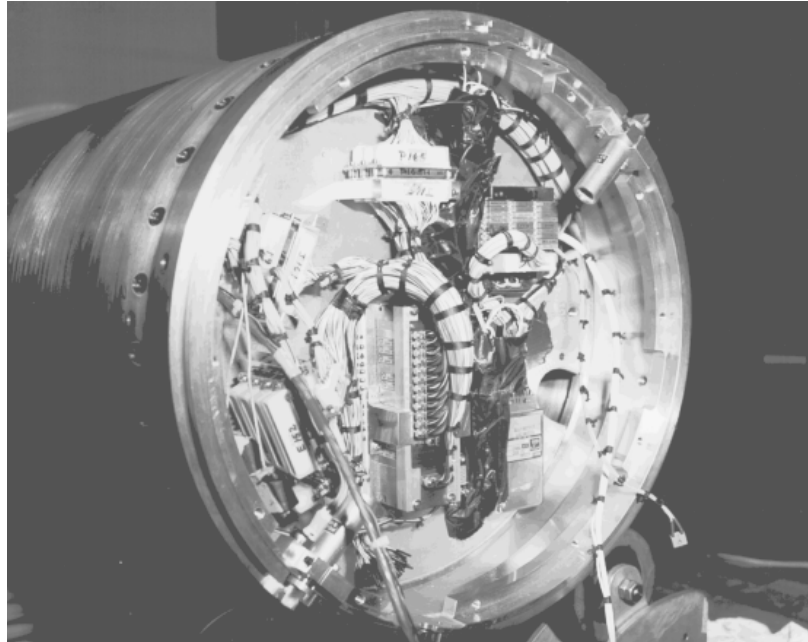

**Figure 5.1.1-1. Typical WFF-93 PCM Encoder**

#### **5.1.4 FM/FM Systems**

In the FM/FM system several sub-carrier oscillators are multiplexed together and the composite signal is used to modulate an FM transmitter. These systems are no longer supported in either building F-10 or N-162.

### **5.2 Attitude Instrumentation Systems**




Several types of attitude sensors are used to provide payload attitude information. These include: The ST-5000 Star Tracker and the GLN-MAC-200 Inertial Attitude Sensor.

#### **5.2.1 The ST-5000 Star Tracker**

The ST5000 Star Tracker is a low bandwidth digital imager developed by Space Astronomy Laboratory, University of Wisconsin under funding by NASA. This star tracker provides 3-axis error information at a rate of 10 Hertz. Tracking of up to 32 stars will continue for rates  $<0.5^\circ/\text{sec}$ . Commanding the Lost in Space (LIS) feature determines an attitude solution in 1 to 5 seconds, typically 1 sec. The quaternion solution is calculated for any area in the celestial sky. Snapshots of observed star fields can be telemetered easily. The patented

Progressive Imaging Transmission (PIT) System transmits a full field-of-view image in <30 seconds over a 19.2 Kbaud RS232 downlink. RS232 at 38.4 Kbaud allows the groundstation GUI to display realtime data and PIT. The ST5000 has flown on five sounding rockets to date, three in 2004. Both camera models use the electronics box that can be placed 15 feet from the camera. A camera, similar to the top left photo, is currently in use at a South African observatory. The cylindrical camera and electronics are used on sounding rockets. The next generation ST5000 will be miniaturized to reduce weight and power. Future ST5000 star trackers will be fabricated at NASA Wallops Flight Facility.

**ST5000 Star Tracker    NSROC P/N: ME54203**

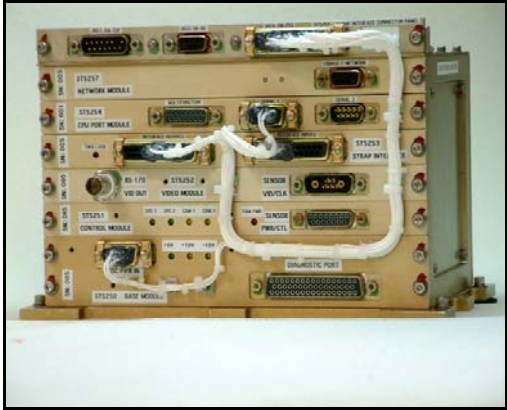




<p><b>Performance Capabilities</b></p> <p>Field of View ..... 5.4 x 7.4 degrees                  Sensitivity Range ..... -1 to +8 magnitude                  Lost In Space – LI ..... Quaternion attitude                  Progressive Image Transmission – PIT ... &lt; 30 sec                  Temperature ..... 0–40°C</p> <p><b>Performance</b></p> <p>Update Rate ..... 0.100 seconds                  Accuracy ..... 17 arc second (16)                  NEA ..... 0.8 seconds (16)</p> <p><b>Datae Output</b></p> <p>RS232 ..... 38.4Kbaud                  Analog (several outputs, ex. temp, error, status) .... 0-5V</p>	<p><b>Nominal Dimensions</b></p> <p>Sensor Head (cylindrical model)...3.6”dia.x 8.9” lg                  Mounting Flange ..... 4.438” dia. B.C                  mount with three 10-32 screws                  Mass ..... 3.7 lbm (1.7 Kg)</p> <p>Electronics ..... 4.9” x 8.0” x 4.5”                  Mounting Flange ..... 5.4” x 9.0” x 0.25”                  mount with twelve 8-32 screws                  Mass ..... 6.4 lbm (2.9 Kg)</p> <p><b>Electrical Characteristics</b></p> <p>Operating Voltage..... +28 V ± 6 V                  Current ..... 515 mA</p>
--	--

**Figure 5.2.1-1: The ST 5000 Star Tracker**

**5.2.2: The GLN-MAC-200 Inertial Attitude Sensor**

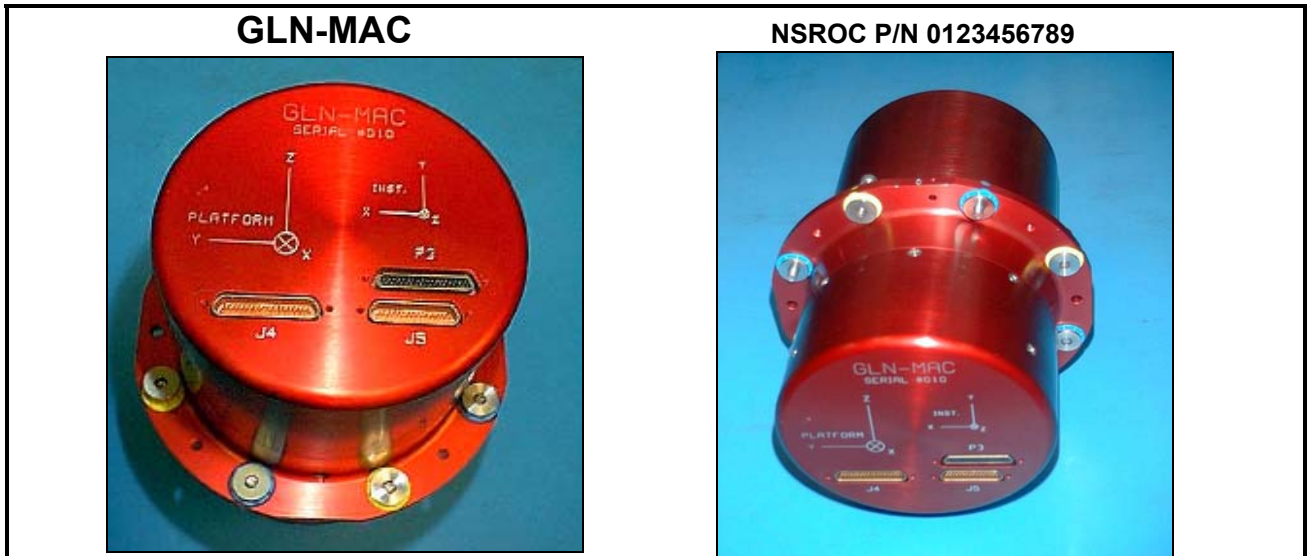The GLN-MAC (Gimbal-mounted LN-200 with Sandia Miniature Airborne Computer) is a roll-stabilized inertial measurement unit for spinning vehicle applications. The GLN-MAC contains a strapdown fiber optic gyro (FOG) and silicon accelerometers. The GLN-MAC was developed by Sandia National Laboratories in 1998. The roll-isolation is provided by having



**GENERAL CHARACTERISTICS**

Performance Capabilities	Nominal Dimensions
Spin Isolation ..... 22 Hz max (9 Hz at 150 gs)	Volume ..... 100 in <sup>3</sup> (1600.4 cm <sup>3</sup> )
<b>LN-200 Gyro Performance</b>	Height ..... 7.7 in (19.5 cm)
Bias Repeatability ..... 1 degree/hour	Diameter ..... 5.38 in (13.7 cm)
Random Walk ..... 0.05 deg/rt-hour	Mass ..... 5.7 lbm (2.59 Kg)
Scale Factor Stability ..... 100 ppm (1 $\sigma$ )	<b>Electrical Characteristics</b>
Bandwidth ..... >500 Hz	Operating Voltage ..... +28 V + 6 V
Operating Range ..... $\pm$ 1000 deg/sec	Current (caged) ..... 750 mA
Quantization ..... 1.9 $\mu$ radian	Current (0-12tps) ..... 0.75-2.1 A
<b>LN-200 Accelerometer Performance</b>	<b>Analog Outputs</b>
Bias repeatability ..... 200 $\mu$ g (1 $\sigma$ )	Gyro X, Y, Z ..... $\pm$ 1000 $^\circ$
Scale Factor Stability ..... 300 ppm (1 $\sigma$ )	Accelerometer X, Y, Z ..... $\pm$ 40 g
Noise ..... 500 $\mu$ g/rt-Hz	+28V Monitor ..... 0-33 V
Operating Range ..... $\pm$ 40 g	+5V Monitor ..... 0-6 V
<b>Data Output Rate</b>	-5V Monitor ..... 0-6 V
Typical ..... 400 Hz	+15V Monitor ..... 0-16 V
<b>Activation Time</b> ..... 0.8 seconds	-15V Monitor ..... 0-16 V
<b>Full Accuracy</b> ..... 5 seconds	Temperature ..... 0-187 $^\circ$ C

**Figure 5.2.2-1: GLN-MAC-200 Inertial Attitude Sensor**

the LN-200 FOG mounted on a gimbal, thereby making it inertially stable from a spinning vehicle. The GLN-MAC isolates against spin rates up to 22 Hz. The LN-200 is used without modification. The LN-200 acceleration range is limited to 40 Gs acceleration, although roll-isolation is capable of more than 150 Gs. The GLN-MAC can be used as a guidance sensor on roll-stabilized sounding rockets, for reentry vehicle instrumentation, or as an inertial attitude control system sensor. The GLN-MAC is mounted such that the vehicle spin axis is parallel to the gimbal's rotational axis. The raw gyro data and computed attitude solutions are available as data output for TM usage.

### **5.3 Magnetometer**

There are several good magnetometers available. NSROC generally prefers to use the Bartington MAG-03MS series, which is used in the NMACS magnetic attitude control system. The magnetometers used are flux gate devices with a  $\pm 600$  milligauss or 60,000 Gamma sensing range, providing an accuracy of approximately 3 or 4 percent when calibrated inside the payload. For flights near the equator, a 450 milligauss magnetometer is used. Magnetometers sense payload attitude relative to the earth's magnetic field and unless aligned perfectly with the field results in attitude knowledge of relative angular displacement from the local magnetic field line. This data, along with data from a solar/lunar or horizon sensor, is used to construct absolute payload attitude. For applications where accuracy is a prime consideration, extreme care must be exercised in the placement of the unit to avoid stray magnetic fields generated within the payload, and high static fields exhibited by magnetized ferrous material.

### **5.4 Solar/Lunar Sensors**

Several versions of solar and lunar sensors have been successfully incorporated in NASA sounding rockets. One of the first solar aspect units was the Bayshore SS-11-DR-1. This unit has a mask etched on the glass viewing window that generates a digital like analog output pattern that is unique for every 2 degree change in payload pitch angle. Full sensing field of view is  $-25$  to  $+69$  degrees measured normal to the sensor face and can measure solar aspect angles between payload spin rates of .2 to 20 Hz. These units are still available today but require 1000 to 2000 samples per second analog data sample rate and require manual processing to generate the attitude angle versus time data plots.


A newer version of lunar and solar sensor was also manufactured by Bayshore (Models SS-12 and LS12.) In these sensors the solar/lunar sensor detects the passage of the light source across slits on the face of the sensor as the rocket spins. Each revolution of the sensor results in a group of two pulses. As the aspect angle changes, the distance between the slits change which results in a change in time between the two pulses. The ratio of the times measured

between the two subsequent pulses and the time for an entire payload revolution determines the payload solar/lunar aspect angle. Used in conjunction with a time event module in a PCM system, the solar/lunar sensor provides an accurate and easily reduced data set which, used in conjunction with magnetometer data, can provide absolute attitude information.

The newest version of solar aspect sensor was developed by Army Research Laboratories and the technology transferred to the NASA Sounding Rocket Program. This system combined solar aspect sensors, magnetometers, and accelerometers in a very compact ruggedized unit. The solar aspect measurement is obtained by incorporating 4 solar sensors (SLIT 98) located on the payload skin at increments of 90 degrees. The Solar Likeness Indicating Transducers (SLITs) are restricted slit silicon solar cells mounted in a housing that includes obstructing geometry that restricts the amount of sunlight that enters and impinges upon the photoelectric cell. The restriction of light properly maintains a constant surface area of sensor illumination over a nearly theoretical half-plane of light acceptance. Thus, the device produces a significant output when aligned with solar field and no output when misaligned. Two of the four photoelectric sensors are mounted parallel to the spin axis and two are mounted at an angle to the spin axis. In a rotating body, the four photocells transmit a pulse train that can be used to determine an attitude vector to the sun.

#### **5.4.1 The NSROC(a) Sun Sensor**

NSROC(a) is a miniaturized attitude determination sensor system originally designed by the Army Research Lab for testing artillery shells. It has been adapted to sounding rockets with planned upgrades for additional sensors, on-board data processing, and self-contained telemetry. It will ultimately include full attitude control. Current capabilities include three-axis accelerometers, three-axis magnetometers with additional redundant channels, a roll rate sensor (to be implemented with accelerometers,) solid-state rate sensor, and sun vector sensor. An available infrared horizon crossing sensor can be interfaced with the NSROC(a). For additional precision in postflight attitude determination, the NSROC(a) sun sensors are used in conjunction with the more accurate Bartington magnetometer to provide a single-axis or three-axis attitude solution which can be accurate to three degrees or better, depending on relative sun vector and magnetic field vector orientation. NSROC is interested in further developing NSROC(a) as a miniature, lightweight, cheap coarse attitude control system for small spinning payloads or sub-payloads. This conceptual system would use but one pneumatic nozzle and a small amount of gas. Characteristics of the NSROC(a) appear in Figure 5.4.1-1 on the following page.

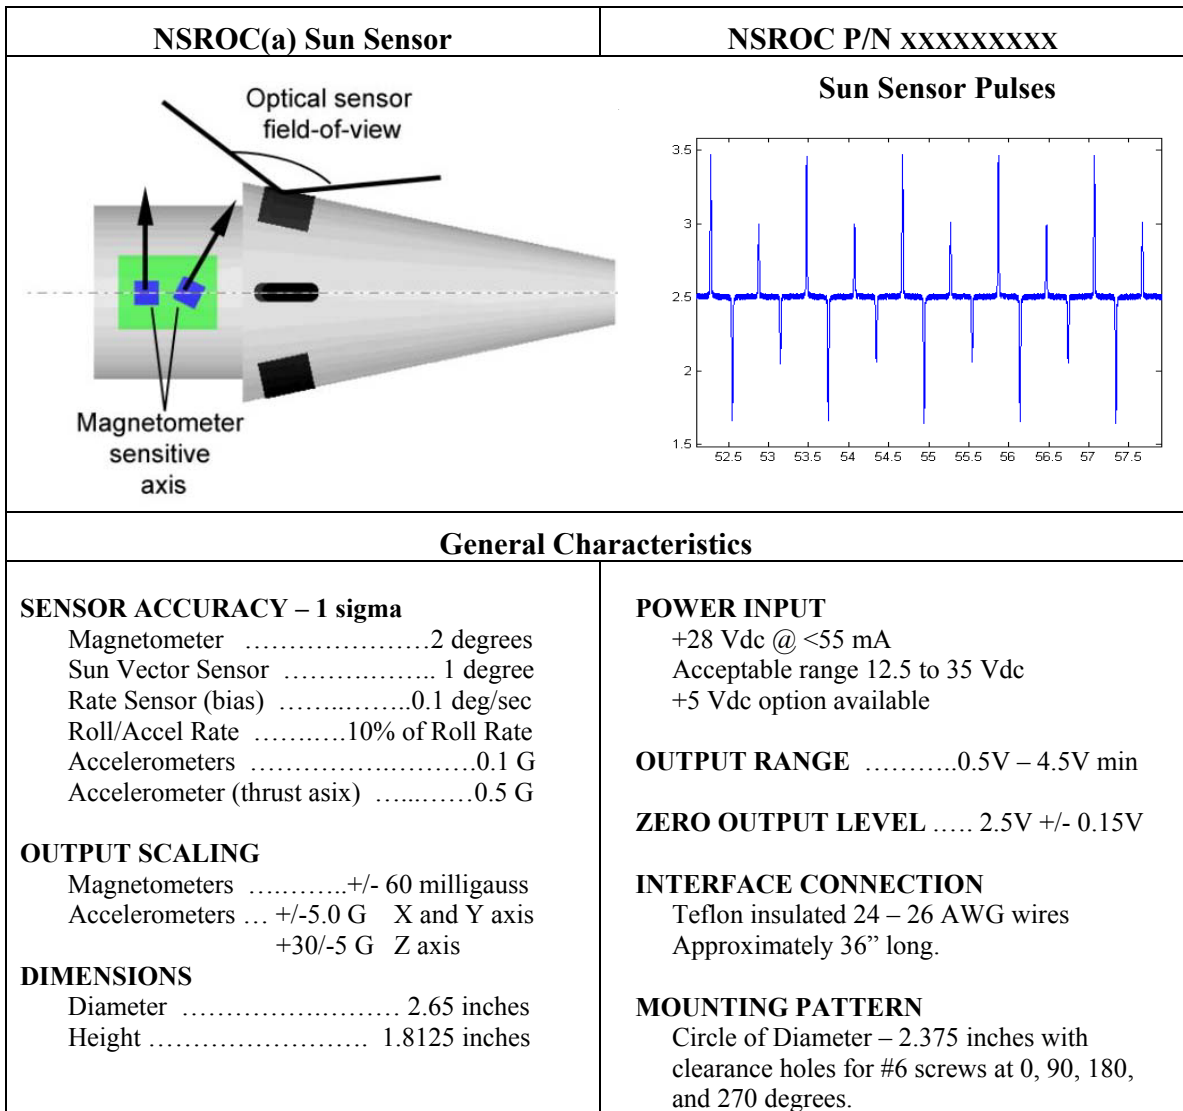

**Figure 5.4.1-1: NSROC(a) Sun Sensor**

### 5.5 Horizon Sensor

Horizon sensors, which operate in the 15 micron region (Infra-Red), consist of a focusing lens, a filter, a thermal detector and associated electronics. The sensor is pointed to view out from the circumference of a spinning rocket and detects transitions of the horizon (sky to earth or earth to sky). This information, combined with data from a magnetometer, provides a source of payload attitude information.

### 5.6 Television Cameras

Television cameras featuring low power consumption, compact size, and very high sensitivity are available for sensing star backgrounds, in-flight events such as payload



ejection's, and rocket motor performance. Intensified charge coupled device cameras have a threshold sensitivity of  $10^{-6}$  foot candles face-plate illumination and are compatible with standard broadcast monitors and recorders. Cameras used on Sounding Rocket payloads operate from a 12-volt D.C. supply and require less than 10 watts of power. Volume is typically 75 cubic inches or less for most TV cameras used and weight is less than 30 ounces. The output from these cameras is transmitted using a wide band TV transmitter, or more recently via a TV video compression deck in the WFF93 PCM encoder. These cameras, when combined with the command uplink system hardware, can be used to fine tune in-flight payload targeting.

### **5.7 Film Cameras**

Thirty-five millimeter motor operated film cameras are provided for use in recording star backgrounds. These cameras are driven from a pulsed power supply programmed by payload timers or by special interfaces provided by the Principal Investigator.

### **5.8 Rate Sensor**

The Humphrey Rate Sensor is an example of the many rate sensors flown on several missions for relative attitude information after being ejected from the main payload body. Within a three inch cube, three single axis sensors are configured into a mutually orthogonal array which sense angular motion. Imagine each sensor being an axis of a three-axis coordinate system (X, Y, Z).

As with most of our linear sensors, they are rate sensing devices. However, it can be safely assumed that anything measured along the sensing axis is equal to a vector component of that axis. The total vector then becomes a Pythagorean calculation (i.e. Square Root of Sum of the Squares). Once the total vector magnitude is known, a simple trigonometry calculation can be made to calculate the off-axis angle of the phenomena being measured. A physical survey of the sensor's position in the payload establishes a frame of reference. The deck plates on which all the equipment is mounted are usually in the roll plane of the vehicle.

This device pumps a fluid using a solid state quartz crystal pump. The fluid is used to cool a hot film resistive wire which is part of a bridge circuit that is trying to remain at constant temperature. As angular moments (motion) is applied to various axis's of the payload (and, therefore the sensor), the flow of the fluid is deflected from its steady state path. The hot film element begins to warm up. The sensing outputs of the bridge circuit couple back to a driving

circuit to reduce power to the bridge circuit to drop the temperature back down. The overall process is roughly linear and proportional to the amount of deflection or motion.

A combination rate sensor and accelerometer package, Inertial Science Inc. model ISIS-IMU (IMU = Inertial Measurement Unit) has been flown on several recent sounding rocket missions. The package is specified as a fully compensated IMU with 6 Degree Of Freedom and provides both discrete channel analog outputs or combined sensor data on a single asynchronous stream output. Rate sensing of up to 5000 degrees per second and acceleration sensing up to 500 G's is possible with this unit.

A third rate sensor that has recently been packaged and flown on a sounding rocket utilizes an Analog Devices ADXRS150 angular rate gyro sensor or gyroscope. This device is a single axis sensor that uses surface micromaching process for the rate sensing and integrates all of the signal conditioning electronics into one 32 lead Ball Grid Array package. The sensor is configured to measure rates of +/-150 degrees per second for a 0 to 5 Volt output.

## **5.9 Transmitters**

A variety of data transmitters are employed with a range of power from 500 milliwatt to 10 watt units. The transmitters are true FM units that are generally AC coupled. Transmitters used on a given project are sized to provide the necessary link margin while at the same time minimizing power requirements. Medium band transmitters have frequency responses up to 1.5 MHz and can be deviated +1 MHz and can be used to transmit PCM data rates up to approximately 1.5 M bits per second.

For wide band data such as high frequency Baseband, high rate PCM, or television transmission, Wideband transmitters are used. Several different units are available that have output power of 1 to 10 watts, frequency response of 6 MHz to 20 MHz, and can be deviated up to  $\pm 12$  MHz.

## **5.10 Command Systems**

Several different command systems are available; selection depends upon the complexity of the command requirements, the launch location, and the other flight hardware configurations on the payload. All of these command systems require an up-link in the 400 MHz or 568 MHz range. Ground stations are equipped with capability ranging from one or two ON/OFF commands to the capability to point a sensor at various areas of the sun or some other target.

Both tone and digital type systems are used. System command rates vary from several seconds per command to several commands per second.

### **5.11 Telemetry Antennas**

Several types of antennas can be used; selection is determined by the function to be performed, the payload and vehicle configuration, and the radiation pattern coverage required. For data transmission, a family of micro-strip antennas has been developed. These antennas, in 2-1/8, 6-5/8, 9, 12, 14, 17.26, and 22 inch diameters, are configured in a variety to allow installation beneath nose cones or other RF transparent skins and to provide varying degrees of thermal protection for different vehicle types. These wrap-around units require from 4 to 5-1/4 inches axially along the payload body. Some use is also made of micro-strip and strip-line antennas made by Ball Brothers and New Mexico State University, respectively. All of these data transmission antennas are linearly polarized and provide a pattern that is basically omni-directional, with nulls at the very center of the nose and tail of the vehicle.

For command purposes, the most commonly used antenna type is the quadraloop and consists of four individual elements. Radiation coverage can be adjusted by the manner in which the elements are connected, and this is frequently done to provide maximally aft or maximally broadside patterns.

For radar transponder applications, two slotted blades or two Valentine units have recently been replaced with circular cavity backed helix antennas. These elements are mounted 180° apart and are fed from a two-way power divider. Special antennas such as cavity backed slots, bent wires, disc micro-strips, and rectangular micro-strips have been designed for unique applications in both the data acquisition and command areas.

### **5.12 Instrumentation and Experiment Power Supply**

The electrical power for instrumentation and experiment electronics on sounding rockets is derived from batteries. The selection of the battery system is based on a consideration of weight, size, capacity, and system power requirements. Although several types of battery systems are available, the ones used by WFF are silver zinc and nickel cadmium. Both battery systems have a very successful flight history and are equal in reliability. However, the

nickel cadmium system is normally the preferred and most cost-effective system. Appendix H lists comparison and performance characteristics for various battery systems.

### **5.12.1 Silver Zinc Cells**

Two different types of silver zinc cells are used in the NASA Sounding Rocket Program

- **High Rate Discharge Series** This series of cells is designed for applications that require the total energy of the cell to be expended in one hour or less. The wet life (life after filling with electrolyte) of this series is approximately 10 to 20 charge /discharge cycles or 6 months, whichever comes first.
- **Manually Activated Primary Series** This series of cells is designed for applications that require quick activation and high rate discharges. The wet life of this series is approximately 3 to 5 charge/discharge cycles, or 15 to 30 days, depending upon particular cell design

The main advantage of the silver zinc system is that its energy density is approximately three to four times greater than that of the nickel cadmium system. Note: These batteries are very seldom used now because of their high cost, hazardous handling requirements, special packaging requirements and limited lifetime once activated.

### **5.12.2 Nickel Cadmium**

All of the nickel cadmium cells that are used in sounding rocket payloads are of the cylindrical sealed cell design. These cells incorporate a resealable safety pressure release vent and are virtually maintenance free. Advantages of the nickel cadmium battery system are:

- Much less expensive
- Not subject to electrolyte leakage
- Can be mounted in any position
- Longer life span and cycle life
- Same battery that is used for environmental testing can be used for flight
- Not sensitive to overcharge
- Maintenance free.

Available NiCad batteries range from 450 milli-Amphere/hour to 10 Amphere/hour capacity.

### **5.12.3 Voltage Output**

The nominal system voltage output from the battery pack is 28V DC  $\pm$ 4V. PI's requiring voltages other than the nominal 28V DC are requested to provide their own power

conditioning. The experiment's 28V can be supplied from the instrumentation batteries or from a separate 28V battery pack located in the instrumentation section. Some PI's prefer to supply their own battery.

**Note:** The PI should provide circuit protection to assure that other flight circuits are not affected by short circuits occurring in the experiment payload equipment.

#### **5.12.4 Heaters**

Externally powered battery heaters are installed on battery boxes in order to maintain battery temperatures above 60°F prior to launch. When this feature is adopted, careful design considerations should be employed to prevent over-heating.

#### **5.12.5 Switching**

All on-board power switching relays are backed up by first-motion lift-off switches or 5,000-foot altitude switches to prevent power loss due to inadvertent relay transfer.

#### **5.12.6 Pyrotechnic Power Supply**

Power for payload pyrotechnic functions is normally supplied from a separate pyro battery. Voltage is made available to the pyro bus through 50,000-foot altitude switches. Squib monitor circuits provide telemetry with an indication of squib firings.

### **5.13 In-Flight Event Timing Systems**

In-flight event timing is normally controlled by mechanical, electromechanical, or electronic timers including barometric switches.

#### **5.13.1 Mechanical Timers**

Mechanical timers consist of three basic components:

- "G" weight actuator
- A spring wound timing mechanism
- An electrical switch system controlling external circuits, that are put into operation at the preset time.

Units with three, four, six, or eight switches are available. Maximum time capacities range from 90 to 600 seconds. The manufacturer's specified time accuracy is  $\pm 2\%$  of the full time

range of the timer; however, experience has shown that repeatability within  $\pm 3$  seconds of the set time can be obtained. The mechanical timers are typically used in older hazardous control systems such as motor ignition and recovery and are being replaced with electronic timers whenever systems are redesigned/updated.

### **5.13.2 Electromechanical and Electronic Timers**

Electromechanical timers have been replaced with the electronic Multi-Function Timers (MFTs) and Reprogrammable MFTs (RMFTs) currently in use. An additional in-flight event timing method has recently been developed (GEM) and is discussed under the GPS section 5.14.3.

#### **5.13.2.1 Multi Function Timer (MFT)**

The MFT uses CMOS logic circuitry for low power consumption and has a separate battery backup power input pin to keep the timing circuit active in case of a dropout on the payload power bus. Time-event decoding is done by programming EPROMs that enable a DC sourcing driver output. There are 30 discrete driver outputs available. Each output can provide +28v (typically but can be other voltages provided all controlled devices can operate at the same potential) DC into a minimum load impedance of 150 ohms. Events can be spaced as close as 100 milliseconds apart. A limited ability to provide random event programming also exists. Programming and re-programming of event times requires removal of EPROM from the timer assembly and special erasing, reprogramming and event time verification efforts.

#### **5.13.2.2 Reprogrammable Multi-Function Timer (RMFT)**

The RMFT was developed to allow in-payload event time reprogramming. The major difference between the MFT and the RMFT is in the microcontroller used for each. The MFT has a microcontroller that incorporates an UV erasable PROM and the RMFT incorporates one with an EE (Electrically Erasable) PROM. One other difference is the RMFT does not require a support module to condition the timer data for the TM or Blockhouse. These monitor functions, as well as external programming for event times, is accommodated via the addition of a 9 pin connector to the unit. The RMFT has replaced the MFT in the Instrumentation Systems and is currently being qualified for replacing the MFT in hazardous CDI systems.

Both timers can be started by either of two methods:

- "G" or lift-off switch closure

- Umbilical release at lift-off.

A safe/arm latching circuit insures that the timer does not accidentally start when using the umbilical release method.

### 5.13.3 Barometric Switches

Barometric switches are used to hold off initiation of functions due to contact chatter during motor burning. Barometric switches operate at preset altitudes to activate or turn off various electronic functions such as internal power. Usually redundant switches are installed; however, they are sensitive to their location. Good design requires that the switches be placed in a location on the payload where they will not be adversely affected by aerodynamic air pressures

## 5.14 Tracking Systems

Four types of tracking systems are or recently have been used on NASA sounding rockets: radar transponders, Trajectory Data System (TRADAT), Doppler and GPS.

### 5.14.1 Radar Transponders

Radar transponders are used to enhance the tracking capabilities of radar. The transponder contains a receiver and a transmitter; both operate in the same frequency band as the tracking radar but are normally tuned to separate frequencies. This frequency separation is normally 75 MHz. The tracking radar interrogates the transponder by transmitting a pulse (or pulse pair depending upon the coding) at the proper frequency. Double pulse codes are normally set on an integer value between 3.0 and 12.0 microseconds. Upon receipt and detection of a valid interrogation (correct frequency and code) the transponder will transmit a reply pulse after a known fixed-time delay - typically 2.5 microseconds.

The power output from a transponder ranges from 50 to 150 watts and provides a much stronger signal to the radar than is obtainable from the reflected skin return from the sounding rocket. The signal level received at the radar from a transponder decays at 6 dB/octave with range, whereas the skin return decays at 12 dB/octave, thereby providing as much as two orders of magnitude greater range tracking capability when using a transponder. The transponder requires an external antenna system. On sounding rockets this may consist of two slotted blade antennas mounted 180° apart on the skin which feed from a two-way power divider.

Transponders are used for several reasons:

- To provide full trajectory tracking when the radars do not have skin tracking capability through the full trajectory
- To provide discrimination between vehicles which are in flight at the same time by means of frequency and/or coding
- To provide a higher probability of obtaining tracking data right off the launch pad
- To provide higher precision data than is available from skin track due to higher signal to noise ratio and a point source target.

#### **5.14.2 Doppler Ranging**

Doppler Ranging has been consistently used in areas such as Andoya, Norway, where only German DLR mobile Radar is available. The Doppler Ranging technique uses a super stable, oven temperature controlled, crystal oscillator to obtain oscillator stability of about  $1 \times 10^{-9}$  percent. The stable oscillator is used as the clock for the PCM encoder bit rate. Currently Norway can support Doppler Ranging at bit rates up to at least 5 M bits per second. Once the RF signal is received by the TM ground tracking antenna, demodulated by the TM receiver and fed to a bit synchronizer, the resulting reconditioned bit sync clock is fed to a phase meter/comparator and compared to a similar super stable bit clock signal. The phase difference between the payload transmitted bit clock and the ground station bit clock is the Doppler frequency generated as a result of the payload moving away from or towards the TM tracking antenna. This Doppler frequency is a direct indication of payload position with respect to the TM tracking antenna; when the tracking antenna azimuth and elevation values are incorporated, a payload position solution can be generated. The key to this system is the stability of the payload PCM oscillator and the accuracy of the TM tracking antenna azimuth and elevation figures. Typically TM tracking antennas resolve the antenna elevation and azimuth angles to .01 degrees whereas Radars resolve these to .001 degrees. The Doppler Ranging system provides a relatively cheap payload position solution method but with reduced payload position accuracy compared to Radar or GPS.

#### **5.14.3 Global Positioning System (GPS)**

The WFF GPS Flight System is based on a 12 channel, L1 band, civilian code GPS receiver, wrap-around antenna, and preamplifier. Wrap-around antennas are available in 22, 17.26, and 14 inch diameters. Time, position and velocity data, and timing signals are multiplexed and transmitted with the payload S-Band telemetry.



Ground support is provided by a lunchbox-size computer, which decommutates the S-Band downlinked PCM video and outputs a real-time differential solution and graphic display of payload position overlaying predicted path. Received payload GPS data can be reformatted to provide a slaving source for accurate pointing of tracking RADAR's and telemetry tracking antennas.

Future missions may be able to take advantage of the accurate GPS position knowledge for in-flight determination of instrument on/off or deployment control. An in-house developed GEM (GPS Event Module) system provides altitude determined (up-leg, apogee or down-leg) control for up to 15 events/functions. This system provides diode Or'ing capability for 12 event timer backup inputs. This system has been fully flight qualified and ready to support upcoming missions. Altitude critical data collection or deployment systems can be controlled to accuracies of several hundred meters or within 300 milliseconds of reaching the designated altitude.

#### **5.14.4 Magnetic Calibration Facility**

The Magnetic Test Facility (MTF) was developed to support the magnetic testing capabilities for NASA at Wallops Island. The MTF consists of the computer, control software, power supplies, racks, computer desk, analog instrumentation chassis, reference magnetometer and relay box.

The coil system consists of a 30 foot "Square Braumbec" design to provide the facility with a 7 foot diameter homogeneous field.

The MTF software is designed to interactively operate the three axis magnetic coil system. The software provides the operator with the ability to control the magnetic coil system either manually or through standardized automated tests. Automated test modes include Zero Bias, Linearity, Cosine Law response, Axis Displacement, and Rotating Field. Other unique tests can be performed if required.

Three channels of analog data, typically corresponding to sensor X, Y, and Z outputs, can be digitized to 14 bit resolution and are sampled, averaged, and stored in computer files for each applied field. The stored data sets are text files which can be imported into spreadsheet software for easy data analysis. Payload RF data can also be sent to F-10 for data recording and display.

## **5.15 Mechanical Systems and Mechanisms**

### **5.15.1 Nose Cones**

Several types of nose cones are available for a variety of applications. These include 11° and 19° straight taper cones as well as 3:1 ogive shapes for 14 and 17.26 inch based diameters. These nosecones are typically available in Aluminum or Stainless Steel, and clamshell (straight taper only) or one-piece nose cones of other materials or special shapes can be provided when necessary.

### **5.15.2 Structures and Skins**

Skins for the 14, 17.26, and 22 inch diameter payloads are usually custom made although some standard items may be used. Internal structures are also designed to fit the application, whether it be a telemetry section or for packaging several scientific instruments, but standard design features such as decks and longerons are commonly employed.

### **5.15.3 Vacuum Doors**

Electrically operated vacuum doors (also known as shutter doors) are available for 17.26 and 22 inch diameter payloads. These doors open an aperture of approximately 15 and 20 inches diameter respectively at the end of a payload structure. Vacuum doors are also available which open a rectangular aperture in the side of a 17.26 inch diameter payload. Vacuum doors are operated to open above the atmosphere and close again before re-entry maintaining a vacuum tight seal during re-entry.

### **5.15.4 Deployment Mechanisms**

Deployment mechanisms actuated by pyrotechnic or other means are available for doors, booms, shutters, etc. Common pyrotechnic actuators include guillotine cutters, used to shear bolts and retaining cords, pin pullers for releasing a mechanism with stored energy, and gas generators for actuating a piston.

### **5.15.5 Vacuum/Water Sealing**

Payloads may be designed with o-ring sealed sections and hermetically sealed feed through devices to prevent entry or exit of gasses and liquids as required.

### **5.15.6 Despin Systems**

In many cases, payloads must operate without the residual spinning motion imparted by the launch vehicle. Also, in special cases, payloads must have very specific spin rates in order to accomplish scientific goals. Payload despin (to zero cps or to a desired residual rate) can be

accomplished by the use of mechanical yo-yo despin systems which release weights on fly-away cables that are wrapped around the payloads circumference and unwind when released. This technique is relatively simple and very reliable. The despin system is utilized to despin both the launch vehicle final stage and payload prior to payload separation. Roll control (roll-up or roll-down) can be provided by cold gas pneumatic systems. These systems are generally part of attitude control systems which are discussed in Section 5.18.

## 5.16 Recovery Systems

The primary use of recovery systems is to retrieve the payload so it can be refurbished and flown again; or to retrieve payloads to obtain scientific data (exposed film, onboard data recorders, or atmospheric samples). Land and Water Payload recovery are both possible on sounding rocket missions.

### 5.16.1 Land Recovery

Several different parachutes are used for land recovery; their principal characteristics are listed below in Table 5.16.1-1.

**Table 5.16.1-1 Characteristics of Land Recovery Parachutes**

Type	Maximum Weight (Pounds)
24 Foot Flat Circular	325
28 Foot Flat Circular	750
36.2 Foot Cross	750
50.25 Foot Cross	1000
56.75 Foot Cross	1250
64.4 Foot Cross	1500

All of these parachutes are deployed in the 15,000 to 20,000 foot altitude region at a maximum dynamic pressure of 250 pounds per square foot.

### 5.16.2 Water Recovery

The water recovery system is rated for gross payload weights up to 500 pounds and it will float up to 225 pounds. At WFF, water recovery can be by boat (US Coast Guard or commercial source) or by helicopter. Larger payloads must have floatation built into the payload.

### 5.16.3 Recovery Aids

Recovery aids assist in the location of the payload to facilitate recovery. Commonly used recovery aids are:

- Flashing Strobe Light
- Dye Marker
- Color Design of Canopy
- Reward Tags
- Sonar "Pingers"

### 5.17 High Altitude Decelerators

High altitude decelerator systems are used to slow a payload so that more time is available for an experiment to be conducted in a specific altitude region. The High Altitude Decelerator is designed to provide a highly stable, high drag area system to successfully deploy from a rocket at altitudes ranging from 40 to 100 kilometers. The higher you deploy a decelerator, the longer it will take to slow down; but, typically, most systems reach equilibrium velocity in the altitude region of 60 kilometers. The characteristics of the four most reliable and frequently flown systems are listed in Table 5.17-1 which shows minimum dynamic pressure "Q" and maximum weight.

**Table 5.17-1 Characteristics of High Altitude Decelerator Systems**

	"Q" (PSF)	MAXIMUM WEIGHT
1.6 Foot Disc Gap Band (DGB)	0.0018	16 Pounds
28 Foot DGB	0.004	50 Pounds
48 Foot DGB	0.007	83 Pounds
63.5 Foot Cross	0.0072	170 Pounds

High altitude decelerators are sometimes specially designed to meet specific scientific mission requirements. Spinning parachutes which use aerodynamic vanes along the canopy skirt or between shroud lines have been developed to provide a spinning sensor platform. This type parachute has been used for spin rates up to 2 cps, depending on descent velocity. Also, special radar-reflective decelerators have been developed for high-altitude wind sensors.

WFF can design special purpose systems to meet unique payload requirements. WFF has the facilities for the design, test, and operation of high altitude decelerators and integration with payload/sensor packages.

## 5.18 Attitude Control Systems (ACS)

Attitude Control Systems provide a stable pointed viewing platform for rocket experiments, which has facilitated the acquisition of large amounts of previously unobtainable scientific data at a relatively low cost. Since a large portion of a flight (typically five to thirteen minutes) is spent well above the atmosphere, scientific observations can be made without atmospheric distortion. Because atmospheric disturbance torques are low during the vacuum free-fall portion of the flight, the rocket can be pointed to any desired orientation and held there with relatively little force. Typical payload objectives range from upper atmospheric studies, observations of the spectral distribution of the energy from stars, planets, and X-ray sources, and magnetic field studies.

NSROC Attitude Control Systems include coarse and fine control systems. Coarse control systems are as follows:

- Inertial systems unsupported by fine sensors.
- Magnetometer systems that align the payload with the earth's magnetic field
- One to three-axis rate control systems.

Fine control systems incorporate fine-pointing sensors as follows:

- **Star Trackers:** The new ST-5000 Star Tracker, developed by the University of Wisconsin, maintains a track of eight stars at once and is capable of initializing itself without external information (i.e., it can solve the "lost in space" problem.) It is currently being incorporated in the tracking loop of the new NSROC Celestial fine-pointing ACS and will replace the Ball single star tracker that is currently in use. Performance capabilities of the ST-5000 Star Tracker are detailed in Section 5.2.1.
- **Sun Sensors:** The current fine sun sensor is supported by a suite of coarse and intermediate sun sensors that allow acquisition and tracking without the need for an inertial platform. Characteristics of the NSROC(a) Sun Sensor are detailed in Section 5.4.1.

WFF selects the most appropriate flight system based on requirements of the experiment and availability of the system for individual launch vehicle and payload configurations. WFF has five flight-proven pointing systems for a variety of applications:

- SPARCS VII (Solar Pointing)
- NIACS – NSROC Inertial ACS (coarse pointing)

- NMACS – NSROC Magnetic ACS
- Celestial NIACS with ST-5000 Star Tracker (replacing AeroJet Mk VI-D)
- NRACS – NSROC Rate Control System.

A rate control system is available for applications requiring very low angular rates (microgravity research). Table 5.18-1 shows the principal characteristics of the systems.

<b>Table 5.18-1 Attitude Control/Stabilization System Capabilities</b>	
SPARCS VII* (Solar Trackers/Mag)	Solar Pointing Only High Accuracy ( ±30 Arcsec on Sun Center) Drift Rate—2 Arcsec/Min
NIACS - Coarse Inertial	±1° Absolute Inertial Accuracy Spinning or non-spinning payloads Drift Rate—5 Arcmin/Min
NMACS - Magnetic (3-Axis Magnetometer)	Spinning Payloads Only (0.5-4.0 CPS) System Will Align to Within 1-2° Spin Rate Control Capability (0.5Hz-4Hz)
Celestial NIACS fine-pointing inertial ACS* (replacing AeroJet Mk VI-D)  *Available in 2006	±2-5 Arcmin Non-Trackable Target Three levels of pneumatic control (all axes) ST-5000 Star Tracker Drift Rate—10 Arcsec/Min
Rate Control System (3-Axis Rate Gyro)	Maintains Low Rate (No pointing) (0.2 °/Sec or Less – 3 Axes) (10 <sup>-4</sup> to 10 <sup>-5</sup> G's)
*Real-Time Ground Command Capability (±1-2 Arcsec)	

### 5.18.1 NSROC Solar Pointing Attitude Rocket Control System (SPARCS VII)

The SPARCS VII is a precise, three-axis solar pointing control system developed specifically for sounding rockets users. All SPARCS VII units are self-contained; this includes control electronics, pneumatics, power and coarse, and intermediate and fine sun sensors. The attitude with respect to the roll axis is measured with magnetometers. The outputs of the sensors are direction cosines to the payload sun line and to the earth's magnetic field vector. This design is lighter in weight, cheaper, simpler and more reliable than systems that require the use of an inertial platform. SPARKS VII supports payloads that are designed to map the sun's temperature, measure X-ray intensity, observe solar features and capture other spectral data.

**5.18.1.1 Capabilities**

The SPARCS' enable signal is programmed to activate the SPARCS pneumatics system when the payload reaches an altitude in excess of 80 kilometers. SPARCS will normally acquire the sun and achieve stable fine pointing within 20 to 40 seconds after the pneumatics system is activated. The Timer setting for this event is determined by payload weight and vehicle flight trajectory data. The sun line and magnetic field enclosed angle (eta angle) should be less than 165 degrees to assure roll angle acquisition; and the launch window should be such that the sun is a minimum of 18 degrees above the horizon. The wobble angle of the sustainer and payload combination after burnout is nominally a half cone angle of 13 degrees or less.

Pointing control stability of less than 0.3 arc-seconds, peak to peak jitter, and solar acquisitions of less than 30 seconds after turn on have been recorded. SPARCS VII also provides a man in the loop system that permits the experimenter to point a SPARCS-controlled rocket while monitoring a video screen. The system is capable of pointing payloads to solar features which could not be clearly defined from ground observations.

Roll angle accuracy is 1.2 degrees; this is achieved with a calibrated magnetometer. For experimenters requiring roll stability to less than .3 degree per hour drift, a rate integrating gyro package (RIG) is available as an option. The RIG unit has demonstrated flight performance of less than 0.1 degree per hour drift.

**5.18.1.2 System Elements**

All SPARCS solar sensors use silicon photo voltaic cells as the detecting element. The cells are operated as a current source with current output proportional to illumination. This mode of operation significantly reduces the effects of temperature on the cell output. The output change with temperature is less than 1.5 percent from 10 to 70 deg C. Sun sensor characteristics are contained in Table 5.18.1.2-1.

**Table 5.18.1.2-1 Sun Sensor Characteristics**

SENSOR	LISS	MASS	CSS
<b>Weight</b>	16 Oz	8 oz	2 OZ
<b>Dimensions</b>	1.4" X 1.4" X 3"	1.0" x 1.0" x 1.4"	0.5" dia

<b>Accuracy</b>	+/- 10 arcsec	+/- 0.5 deg	+/- 1.0 deg
<b>Field of View</b>	+/- 20 deg	+/- 35 deg	+/- 180 deg

The Lockheed Intermediate Sun Sensor (LISS) is a photoelectric fine sun sensor which provides precise pitch and yaw attitude information to the system in the fine control mode. The detector assembly is a quadrant array of four silicon N-on-P cells. Opposite cells are connected back to back to provide an error signal proportional to the difference in radiation falling on each cell A mode sensor. Each mode sensor has a circular field of view of 10.5 degrees and is used by the control system to switch acquisition modes.

The Miniature Acquisition Sun Sensor (MASS) is a restricted field of view (35 degree half cone) sensor used for coarse acquisition. The restricted field of view minimizes albedo effects; since the MASS and CSS signals are summed, solar energy is enhanced. The MASS is mounted on the front of the experiment and is aligned to the LISS electrical null.

The Coarse Sun Sensor (CSS) employs four sensors mounted with their normal lines along the transverse vehicle coordinate axes. Each sensor consists of two solar cells (the main cell and the bias cell) which are shaded by the pedestal construction to restrict the field of view. This ensures that the bias cell does not receive sun energy when the pointing axis is less than a 30 degree half cone angle from the sun. In this condition, the output of the bias cell is a function of the earth albedo. The output of the bias cell is first attenuated by 60% and then subtracted from the main cell output. The bias cell is attenuated to assure positive control for large initial solar pointing error when both cells see the sun.

The magnetometer in use on the SPARCS VII is a miniature, 3-axis Bartington Model MAG-03MS which utilizes the flux gate principle. Fluxgate sensing elements are mounted orthogonally at one end of the enclosure that contains the electronic circuitry; the connector is mounted at the opposite end of the enclosure. The sensors provide three high-precision analog outputs of 10 Volts full scale, proportional to the magnetic field along each axis. The relationship between the magnetic field and the analog output is very linear and the frequency response is flat from dc to at least 1 kHz with a bandwidth in excess of 3 kHz for the standard version. The low output impedance of the unit enables it to be operated over long cables and permits it to be interfaced to low impedance data acquisition systems.



### 5.18.1.3 Physical Parameters

The SPARCS VII unit consists of a pair of 17.26 inch diameter inserts for use with a standard Black-Brant rocket. One insert contains the electronics; the other contains the pneumatic control system. The size of the pneumatic section may vary depending on the size of the tank required. A hybrid version that uses just one section to house both pneumatics and electronics has also been developed.

The nominal SPARCS VII high pressure propellant vessel is an 880 cubic inch spherical composite tank manufactured by Brunswick. These tanks offer a proof pressure of 10150 psig, a working pressure of 5075 psig, and a man-rated pressure of 2537 psig.

### 5.18.1.4 Payload Interface

Absolute pointing with the Lockheed Intermediate Sun Sensor (LISS) is primarily a function of the alignment of the attitude sensor to the experiment (typically a few arc-seconds). The opportunity to stabilize the experiment and collect useful information on the sun lasts about 5 to 7 minutes, depending upon the weight of the payload and the type of rocket used.

Instrumentation for the mapping of the sun's temperature, X-ray intensity, observation of solar features and other spectral data are among the many payloads commonly employed in these experiments.

The Lockheed Intermediate Sun sensor (LISS) contains a reference optical surface (ROS); the ROS is a polished aluminum surface that is an integral part of the main housing. The electrical null axis is aligned to the ROS, which is the reference for alignment to the experiment.

SPARCS provides a man in the loop system that permits the experimenter to point the SPARCS payload while monitoring a video screen.

### 5.18.1.5 Ground Support Equipment

The SPARCS VII GSE is a PC Laptop computer used to display the status of the system and to load flight parameters. The GSE includes an external power supply box with a built-in battery charger, an External/Internal switch, a voltmeter to monitor battery voltage and pressure transducers, and a current meter. SPARCS Attitude Control (SACSE) is a hardware-in-the-loop (HILTS) test platform that models a rigid free body (payload) with

controlled thrusters, rate and attitude sensors. This system allows a rapid, inexpensive and comprehensive evaluation of ACS electronics, control equations, and flight parameters.

#### 5.18.1.6 Operation

The SPARCS VII design is configured to provide rapid solar acquisition and the low pointing jitter required for scientific observation. This is accomplished by SPARCS' three basic modes of operation:

- **The Initial Coarse Mode** utilizes high control thrust and wide angle sun sensors for rapid solar acquisition from any initial attitude.

Initial solar acquisition is performed using a set of four coarse solar sensors (CSS) mounted on the circumference of the SPARCS insert. These sensors provide a 360 degree field of view which allows solar acquisition from any initial position. Roll position is obtained using a magnetometer that senses payload orientation with respect to the earth's magnetic field. To assure rapid solar acquisition, a miniature acquisition sun sensor (MASS) mounted on the forward end of the payload is used in conjunction with the CSS. The MASS has a 70 degree field of view which reduces the pointing errors induced by solar reflection from the earth's surface (albedo). The narrow field of view shades a major portion of the sensor from the earth in the final pointing orientation.

The coarse mode is terminated when the mode sensor indicates a sun presence signal for period of approximately 4 seconds. The time delay avoids switching on false signals and assures that the vehicle rates are within limits for intermediate mode operation.

- **The Intermediate Mode** is initiated when the pointing error is reduced to less than 10 degrees from the solar disc. The narrow field of view of the fine pointing sensor is used in the intermediate and in the fine mode to eliminate the pointing error induced by solar reflection from the earth's surface (albedo). In the Intermediate mode of operation, the CSS, MASS and pitch gyro are disconnected and position

control is derived from the FSS. Pitch and Yaw damping terms are obtained from the rate gyro. Roll control remains unchanged in the intermediate mode.

- **The Fine Mode** is the final phase; control thrust is reduced and electronic gains increased to provide the tight control loop required for precision pointing. The pneumatic system uses differential thrust to cancel out transient effects and provide fine control. The final pointing phase is performed using a precision sun sensor mounted on the forward end of the payload. This sensor has a 20 degree field of view that is completely shaded from the earth. Absolute pointing with the Lockheed Intermediate Sun Sensor (LISS) is primarily a function of the alignment of the attitude sensor to the experiment (typically a few arc-seconds). The opportunity to stabilize the experiment and collect useful information on the sun lasts about 5 to 7 minutes depending upon the weight of the payload and the type of rocket used.

Roll control remains essentially unchanged for all modes of operation. Minor gain changes are programmed to provide control stability in the various modes of operation as the pneumatic pressure changes. Damping in all modes is provided by a rate gyro. Roll position for SPARCS is derived by the use of magnetometers for roll attitude sensing.

SPARCS VII employs three pairs of electro-magnetically operated poppet valves for payload control. The valve command electronics provides a unique proportional thrust control system. This system, a Differential Pulse Width (DPW) modulator, results in an average control thrust which is proportional to error signal magnitude. The instantaneous thrust level during valve actuation is a function of supply pressure and gas and control nozzle characteristics; it is not altered by modulation. With the DPW technique used in fine mode, opposing valves are actuated to provide the precision control required for sub arc-second pointing. The coarse mode is operated in a standard bang-bang mode to save propellant. After re-entering the atmosphere, the experiment and the SPARCS VII control system are recovered by parachute, refurbished and re-flown.


### 5.18.2 NSROC Inertial ACS (NIACS)

The NSROC Inertial ACS (See Figure 5.18.2-1 on the following page) is an all in one, digital control system that can orient the payload with respect to an inertial reference. The controller

is microprocessor-based resulting in maximum flexibility. The controller, pneumatic subsystem, battery, and platform are all located within a 19-inch skin section. Up to four 200 cu in pressure tanks can be used, resulting in a 22-inch length. A dead-band can be programmed so the ACS doesn't make corrections unless the error is greater than X degrees. This prevents data from being corrupted by abrupt changes in attitude or rates while allowing the system to maintain the desired alignment. The dead-band can be selectively reduced to improve alignment in non-critical phases of the flight.

### 5.18.2.1 System Elements

The NSROC Inertial ACS (NIACS) is a cold-gas attitude control system for exoatmospheric applications. It contains a roll stabilized fiber-optic gyro/IMU with an embedded Motorola 68360 microprocessor. The attitude determination and control algorithms output commands to pneumatic valve drivers which control pointing in yaw, pitch, and roll. The pneumatic control system operates at two pressure levels. Available gasses include Nitrogen, Argon, and Freon-14. A differential pressure mode of operation provides very fine pointing control. An expansion module is available which doubles available maneuvering time by providing an additional pneumatic tank. Raw gyro data and computed attitude solutions are available for TM output.

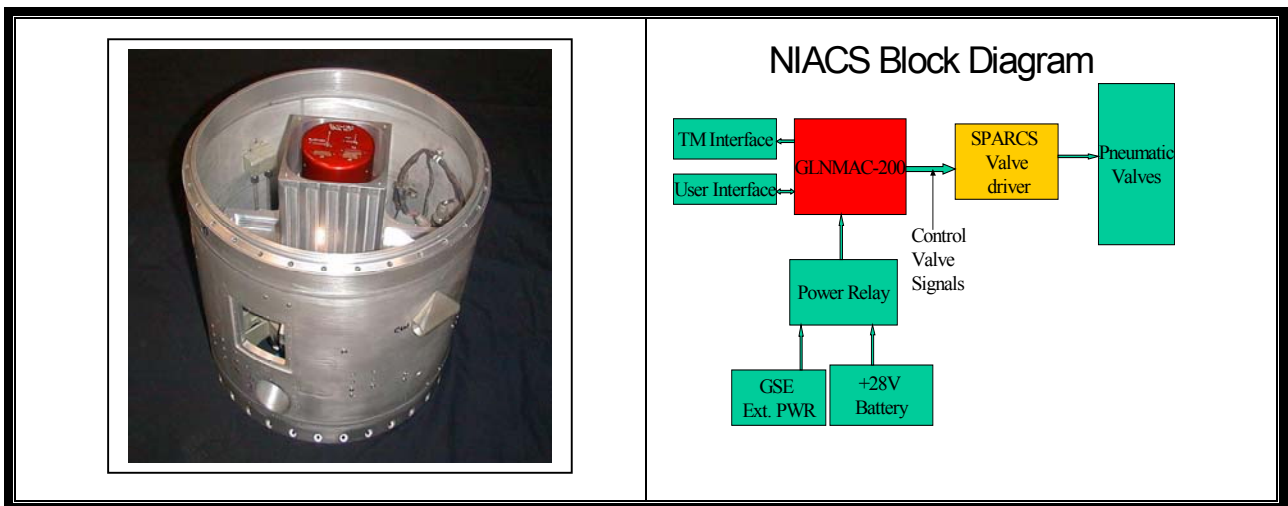

<p><b>Sensor:</b> GLN-MAC-200 roll-stabilized IMU developed by Sandia National Laboratories containing a Litton LN-200 Fiber-Optic Gyro.</p> <p><b>NIACS Performance Specifications</b></p> <p>Axis Misalignment.....0.1mRad                  Scale Factor Accuracy.....100ppm (1σ)                  Bias Repeatability (Drift).....1 deg/hour                  Random Walk.....0.07 deg/sqrt(hour)</p> <p>G-Sensitive Bias.....0.01 deg/hour/G                  Vibration Sensitive Bias.....0.02 deg/hour/G<sup>2</sup>                  Operating Range.....± 1000 deg/sec                  Angular Acceleration.....100,000 deg/sec<sup>2</sup>                  Quantization.....1.9 μ radian                  Bandwidth.....&gt;500 Hz                  Spin Rate Isolation.....22 Hz                  Maximum Thrust Acceleration.....40 G                  Data Output Rate.....400 Hz                  ACS Sampling Period.....50 Hz</p> <p><b>Electrical System</b></p> <p>Operating Voltage.....28 v                  Batteries.....24-cell AE @ 1.8 amp-hr                  Pneumatic Solenoids.....30 ohms, 0.9 amps (each)                  GLN-MAC-200.....0.9 amps                  Telemetry.....analog and async serial data</p>	<p><b>NIACS Attitude Stability</b></p> <p>Absolute Pointing Error.....&lt; 1 deg (all 3 axes)                  Jitter .....&lt; 0.05 deg peak-to-peak                  Acquisition Time.....&lt; 50 sec                  Gain Margin.....&gt; 6 dB                  Phase Margin.....&gt; 40 deg                  Pitch/Yaw Fine Step Response.....&lt; 5 sec</p> <p><b>Pneumatic System</b></p> <p>Tank Capacity.....370 cu in                  Tank Pressure.....5000 psia max                  Number of Tanks.....1 or 2                  Maximum Payload Size.....1200 lb                  Regulated Pressure (Coarse Mode)...500-1000 psi                  Regulated Pressure (Fine Mode).....35-60 psi</p> <p><b>Nominal Dimensions</b></p> <p>Diameter ..... 17 in (x.x mm)                  Height.....x.x in (xx mm)                  Weight.....x.x lb (x.x kg)                  Height (Expansion Section).....x.x.in (xx mm)                  Weight(Expansion Section).....x.x lb (x.x kg)</p> <p style="text-align: center;">(Custom sizing and packaging is available)</p>
--	--

**Figure 5.18.2-1: NSROC Inertial ACS**


Future expansion plans include incorporation of Rate-Integrating Gyros and a Star Tracker for fine pointing on celestial targets, and full navigation capabilities provided by IMU and GPS.

It has been designed for, and flown on, a 17-inch diameter Black Brant payload using a GLN-MAC Roll Stabilized Platform as Inertial Reference, SMAC Control Electronics with a Motorola 68HC11 Microprocessor, and a Pneumatic Reaction Control Subsystem. Mission lead time is expected to be 4 - 12 months (dependent on mission loading.)

### 5.18.3 NSROC Magnetic ACS (NMACS)

The NSROC Magnetic ACS (See Figure 5.18.3-1 on the following page) is an all in one, digital control system that can orient the payload with respect to the earth’s magnetic field. The controller is microprocessor-based, resulting in maximum flexibility. A typical mission will have a spinning payload aligned to the local magnetic field. The controller, pneumatic subsystem, battery, and rate sensor are all located within an 11½ inch skin section. The magnetometer used for control can be located anywhere on the payload. A dead-band can be programmed so the ACS doesn’t make corrections unless the error is greater than X degrees. This prevents data from being corrupted by abrupt changes in attitude or rates while allowing the system to maintain the desired alignment. The dead-band can be selectively reduced to improve alignment during non-critical phases of the flight.

**NSROC Magnetic Attitude Control System (NMACS)      NSROC P/N 44469**

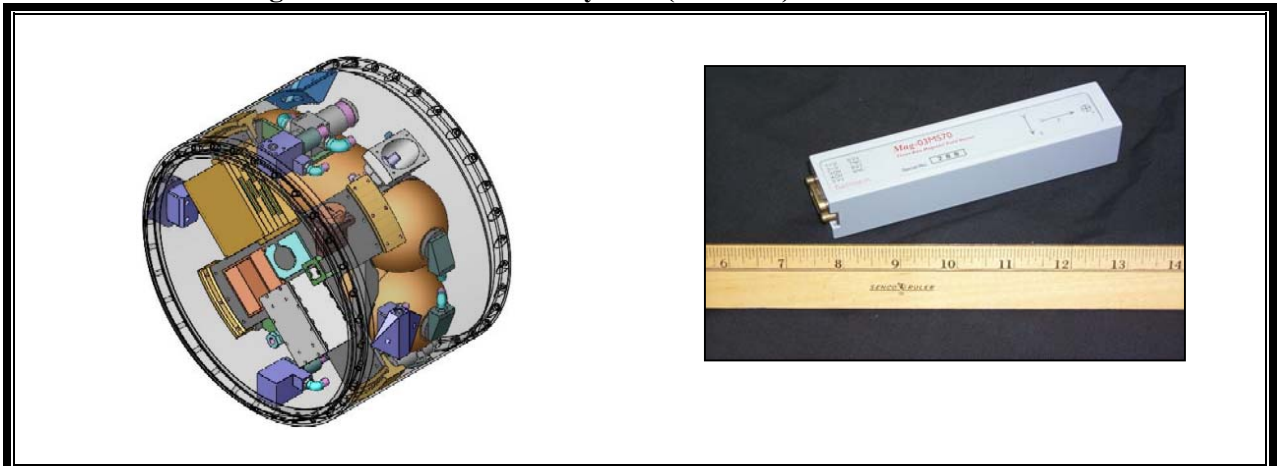

#### FEATURES

The NSROC Magnetic ACS (NMACS) is a cold-gas attitude control system for exoatmospheric applications. It provides attitude control to align the payload longitudinal (roll) axis with the local earth magnetic field vector to an accuracy of 5 degrees or less (sensor dependent.) This control can be provided for spinning (0.5 to 4 Hz) payloads. The attitude determination and control algorithms output commands to pneumatic valve drivers which control pointing in yaw, pitch, and roll. The pneumatic control system operates at one pressure level. Available gasses include Nitrogen, Freon, or Argon. The pneumatics capability is configurable for 1 – 4 tanks (200 in<sup>3</sup> each.) Raw sensor data and computed attitude solutions are available for TM output. The NMACS is available in 14.0 and 17.26 inch diameters. Overall pointing accuracy may be enhanced by adding higher resolution magnetometers.

**AVAILABILITY / STATUS:** Available/Mission lead time after 4 months.

<p><b>Sensor:</b></p> <p>Bartington MAG-03MS 3-axis fluxgate magnetic field sensor. Compact high performance sensor with integral electronics. Measuring range is 70 uT with 0.1 degree orthogonality.</p> <p><b>NMACS Performance Specifications</b></p> <p>ACS Sampling Period.....66.66 Hz</p> <p>Absolute Pointing Error.....&lt; 5 deg</p> <p>Convergence Time.....(Varies) &lt; 60 sec</p> <p>Gain Margin.....&gt; 6 dB</p> <p>Phase Margin..... &gt; 40 deg</p> <p>Telemetry.....Analog and async serial data</p>	<p><b>Nominal Dimensions</b></p> <p>Diameter .....14.0 or 17.26 in</p> <p>Height.....(17.26 in <math>\phi</math>) 11.25 in</p> <p>Weight.....(17.26 in <math>\phi</math>, 2 tank, no gas) 52.0 lbs                  (Custom sizing and packaging is available)</p> <p><b>Pneumatic System (17.26 in <math>\phi</math>)</b></p> <p>Tank Capacity (per).....200 in<sup>3</sup></p> <p>Tank Pressure.....5000 psia max</p> <p>Number of Tanks.....1 - 4</p> <p>Regulated Pressure .....250-500 psi</p> <p><b>Electrical System</b></p> <p>Operating Voltage.....28 V</p> <p>Battery Pack.....24-cell, 1.8 Amp-hr</p> <p>Pneumatic Solenoids.....30 ohms, 0.9 amps (each)</p> <p>Electronic Stack..... 0.200 amps</p>
--	---

**Figure 5.18.3-1: NSROC Magnetic ACS**

#### 5.18.4 NSROC Rate Control System (NRACS)

The NSROC Rate Control System (NRACS) is essentially an NMACS with the magnetometer control input deleted. The NRACS can be programmed to control rates about any or all axes.

A sounding rocket payload free falling in space, with low angular body rates, provides a near zero-G environment. To efficiently utilize this time above the Earth's atmosphere, a positive means of controlling angular body rates must be provided for the payload. The three-axis cold-gas Rate Control System (NRACS) is used to minimize body rates for scientific and research applications requiring stabilization or low angular rates. After the sounding rocket exits the atmosphere, the payload separates and the NRACS reduces the initial angular rates to < .2 degrees per-second in all three axis and maintains the low levels until the payload re-enters the atmosphere. The NRACS then spins up the Payload to help dissipate skin heating during re-entry. Payloads can experience environments of < 10 micro-Gs for 300 seconds or more.

Zero-G does not mean the absence of the Earth's gravitational field, but the absence of a net acceleration force on one portion of the payload, relative to other portions of the payload. To

provide a very low acceleration field for an extended period of time, two conditions must be met:

- 1) Absence of a force gradient acting on the body
- 2) Absence of angular body rate.

A sounding rocket payload in free fall above the Earth's sensible atmosphere meets the first condition. The second condition is met by the proper operation of the RCS. Payload design must eliminate the possibility of extraneous forces that may be caused by mass expulsion or momentum exchange within the payload.

#### **5.18.4.1 System Elements**

A prototype NRACS has been flown. The system is a simple derivation of the NMACS magnetic control system and uses all the same parts, with the exception of the magnetometer sensor. NSROC can provide NRACS systems for 17 inch, 14 inch, or smaller diameter payloads. The system includes:

- Three-axis Quartz Rate Sensor (QRS) Package
- Digital Control Electronics
- Reaction Control Subsystem.

#### **5.18.5 Celestial NIACS (fine-pointing) Inertial ACS**

The Celestial NIACS fine-pointing ACS incorporating the ST-5000 Multiple Star Tracker is replacing the AeroJet Mark VI and VI-D Inertial ACS. Currently, two test missions are scheduled for FY 2005 and the first operational mission is scheduled for early FY-2006.



## SECTION 6: Environmental Testing Policies

This section summarizes the Environmental Testing policies for NSROC. The content is largely an excerpt of the *NSROC Environmental Testing Manual* (document # ME40280) which can be accessed through NSROC's document control system.

### 6.1 General Requirements

All tests, whether conducted on components or entire payloads, must be initiated by a Test Request. The individual responsible for the test must fill out a Test Request Form (available from NSROC Engineering) and submit it to the Testing and Evaluation Group.

#### 6.1.1 Qualification Testing

New component designs are required to undergo design qualification testing. These tests expose items to environments that are more severe than those experienced throughout the mission. This ensures that the design is sound and that there is high confidence that failure will not occur during a mission. Components that undergo qualification testing are not used for actual flight.

#### 6.1.2 Acceptance Testing

Previously qualified component designs and all fully assembled payloads (new or re-fly) must undergo acceptance testing, which exposes test items to the environments that mimic those experienced during a mission. These tests are the final gauge for determining the launch worthiness of a component or payload.

#### 6.1.3 Principal Investigator Testing

Principal Investigators are encouraged to test their components to standards similar to those included in this document prior to delivery to the integration site. If this is not possible, the NSROC facilities described hereafter can be utilized. It is recommended that Principal Investigators report to the Mission Manager any environmental testing completed prior to delivery. This information is required if the Principal Investigator requests a waiver for a test normally conducted by NSROC.

#### 6.1.4 Test Plan

The Mechanical Engineer is responsible for developing a test plan for a particular payload and its related components. This entails 1) determining exactly which tests are required; 2)

scheduling a time frame for testing with the Environmental Testing and Evaluation Group; 3) generating test requests for each test; and 4) writing procedures for all hazardous and/or complex tests. Some additional tests may be done by Telemetry Engineering or Power Engineering.

## 6.2 Testing Equipment and Capabilities

NSROC has two principal testing facilities. The main one is located at the NASA Wallops Flight Facility (WFF) in Wallops Island, VA, and the other is at White Sands Missile Range (WSMR) in White Sands, NM. Both facilities have the testing equipment necessary to perform the following functions:

- Mass properties measurements
- Static/dynamic balancing
- Vibration tests
- Bend tests
- Thermal and vacuum tests
- Magnetic Calibrations

In addition to these, WFF is also equipped with a spin deployment chamber and a centrifuge machine at the Main Base. A second spin balance facility for balancing rocket motors is located on Wallops Island near the launch range.

### 6.2.1 Mass Properties Measurement Systems (WFF and WSMR)

The Environmental Testing and Evaluation Group at WFF is equipped with an Airdyne Mark 8 mass properties measurement system (Figure 6.2.1-1). This unit is used for measuring center of gravity (CG) locations and moments of inertia (MOI) on sounding rocket subsystems and payload stacks. Important technical data include:

- Maximum test article weight: 5,000 lb.
- Maximum CG height above the table: 120 in.
- CG and MOI measurement accuracy: 0.1%

The NSROC facility at WSMR is equipped with an MRC model MKVII-12 mass properties measurement system. It has the following properties.

- Maximum test article weight: 2,500 lb.
- Maximum CG height above the table: 242 in.
- CG and MOI measurement accuracy: 0.1%

It is also used to perform all static and dynamic balancing of sounding rocket payloads at WSMR.



**Figure 6.2.1-1 Airborne Mark 8 Mass Properties Measurement System at WFF**

### **6.2.2 Static and Dynamic Balancing Machines (WFF & WSMR)**

At WFF, a Gisholt Rocket Balancing Machine is used to balance sounding rocket payloads (Figure 6.2.2-1). This machine's specifications are listed below.

- Max. payload weight = 1500 lb.
- Max. height of CG above table = 10 ft.
- Measurement accuracy = 2.0 oz. – in.<sup>2</sup> at 225 rpm or more



**Figure 6.2.2-1 Gisholt Rocket Balancing Machine at WFF**

At WSMR, Dynamic Balance is tested on an MRC Corporation Machine, which has the following capabilities:

- Maximum payload weight: 2500 pounds.
- Crane Hook Height: 52 feet.

- RADIUS: 48 inches maximum (if fixtures are available).
- Total indicated Runout is also performed on this machine.
- Dynamic Balance Accuracy: To 3.5 ounce – inches squared for a small 25 lb. Payload to less than 1000 ounce<sup>3</sup> – inches squared with a 1500 lb. Payload.

**6.2.3 Shakers (WFF and WSMR)**

There are four Ling Electronics shakers used for component and payload vibration tests at WFF (Figure 6.2.3-1) and two at WSMR. The following table summarizes some technical information on the shakers.

**Table 6.2.3-1 NSROC Shaker Specifications**

Shaker	B340	B335 (x2) WFF	B395 WFF	B335 (x2) WSMR
Rated Force Sine (lb.)	30,000	18,000	6,000	18,000
Rated Force Random (lb. rms)	30,000	18,000	5,750	18,000
Frequency Range (Hz)	5-2,000	5-3,000	5-3,000	5-3,000
Maximum Displacement Peak-Peak (in.)	1.0	1.0	1.0	1.0

The B340 can be rotated to mate with a TEAM Corp. model 482 sliding table so that it can be used for both thrust axis and lateral vibration tests. This table has the following specifications.

- Max. pitch moment capacity = 1,200,000 lb.-in.

One of the B335 units at WFF is connected to a TEAM Corp. model 1830 sliding table while the other is kept in the thrust axis position. This arrangement facilitates performing three-axis vibration tests in a timely manner, without having to rotate the shaker. Both B335 shakers at WSMR are also equipped with the TEAM 1830 table, which has the following specifications.

- Max. pitch moment capacity = 240,000 lb.-in.



**Figure 6.2.3-1: Ling Electronics B335 Thrust Axis Shaker at WFF**

The B395 is a smaller shaker mostly used for component level tests at WFF. Both the WFF and WSMR test facilities are equipped with 11 in. cube fixtures so that tests can be performed on small components in all three axes by mounting the test article in different orientations. At the engineer’s or Principal Investigator’s request, sensors can be mounted on any part of the payload to monitor its response. WFF has 16-channel capability and WSMR has 8-channel capability.

**6.2.4 Vacuum Chambers (WFF and WSMR)**

WFF has three sealed chambers capable of evacuating to approximately  $10^{-6}$  torr. Two of these chambers are mainly used for performing corona checks on subsystems that utilize high voltage components (PV/T, Tenney Space Jr.). The third can be used as a thermal-vacuum chamber and as an ultra-clean environment for testing other components that require contaminant-free surroundings (Tenney Space Simulation System). The table below summarizes technical data on these chambers. Chambers appear in Figure 6.2.4-1.

**Table 6.2.4-1: NSROC Vacuum and Thermal Vacuum Chamber Specifications**

Manufacturer	PV/T Inc.	Tenney Space Simulation System	Tenney Space Jr.
Inside Dimensions (ft. dia. x ft. lg.)	7x12	2x2	1.2x1.0
Minimum Pressure (torr)	$2 \times 10^{-5}$	$3 \times 10^{-8}$	$7.5 \times 10^{-8}$
Temperature Range (°C)	N/A Heat lamps used if needed	-73 to +125	N/A

Pump Type	Diffusion	Cryogenic	Diffusion
Clean Environment?	No	Yes	No



**Figure 6.2.4-1 PV/T Vacuum Chamber (left) and Tenney Space Simulation System Thermal Vacuum Chamber at WFF**

The PV/T Chamber is also equipped with a mass spectrometer for outgassing analysis. In addition, WFF is equipped with several leak detectors and portable vacuum systems. Specifications for this equipment are available upon request. They include:

**6.2.4.1 The Portable Vacuum System.** This is a 91 cm (36 in) unit with a 10.1 cm (4 in) flange adaptable to a similar mating surface for the purpose of pumping a vacuum on any sealed container. Pumping is accomplished by a 5 cm (2 in) diffusion pump in conjunction with a roughing pump and a cold trap (LN<sub>2</sub>, Freon or water). The vacuum capability is 10<sup>-7</sup> torr or lower. There is no specific limitation as to the size of test chambers; however, the pumping capacity restricts the volume for high altitude simulation. Various other portable systems are available that employ cryosorption and cryogenic pumps.

**6.2.4.2 The Vacuum Leak Detector – Helium Mass Spectrometer.** This is used for leak detection, two models are available: a Varian Model 938-41 Leak Detector employs a diffusion pump and can detect leaks as small as 10<sup>-9</sup> cc/sec. An Ulvac Model DLMS-531

employs a turbo pump and can detect leaks at the rate of  $3 \times 10^{-10}$  cc/sec. There is no specific limitation as to the size or type of items to be leak tested. Typical items tested include sealed payload units, pressure bottles and vacuum chambers.

**6.2.4.3 Vacuum Bell Jars.** The Vacuum Bell Jar is a cylindrical vertical chamber measuring 45.7 cm (18 in) in diameter by 91.4 cm (36 in) high. The bell jar is equipped with a 0.14 m<sup>3</sup>/min (5 cfm) mechanical pump. This system is used to test altitude switches and small components up to an altitude of 200,000 ft using a mechanical pump. A second Bell Jar utilizing a Turbo Pump can be used for “clean” items and is capable of  $10^{-8}$  torr vacuum. This Turbo Pump is portable and can be detached from the Bell Jar and attached to a payload to maintain vacuum.

WSMR has two sealed chambers capable of evacuating to approximately  $10^{-6}$  torr. These chambers are also used for performing corona checks on subsystems that utilize high voltage components. Normally used with dual Welch 1397 oil sealed mechanical forepumps, fittings also allow the use of Cryo-trap equipped Turbo pumps. Other uses have been Nozzle flow separation tests into a vacuum. The table below summarizes technical data on these chambers. WSMR is capable of supporting the varied experimenter needs found in the field environment through unique system configurations, adapters and pumping setups. WSMR also has an Helium Leak Test System available.

**Table 6.2.4-2 WSMR Vacuum and Thermal Vacuum Chamber Specifications**

Manufacturer	NRL	PSL	Notes
Inside Dimensions (in.dia.x in.lg.)	20x36	31x51	Aluminum
Minimum Pressure (torr)	$1 \times 10^{-6}$	$1 \times 10^{-6}$	
Temperature Range (°C)	N/A	N/A	
Pump Type	Turbo Model #3133C	Turbo Model #3133C	With Welch 1397 forepumps

**6.2.5 Bend Test Fixtures (WFF and WSMR)**

Every sounding rocket payload is subjected to a bend test in order to determine the overall stiffness of the body. This information is used by the Flight Performance Group to verify payload stability during flight. The bend test fixtures at WFF and WSMR consist of a base

plate mounted to the concrete floor and a pneumatic (WFF) or motor driven (WSMR) linear actuator mounted to a steel I-beam pillar. The pistons are equipped with load cells, which are used to measure and control the applied load. The aft end of the payload is fastened to a base plate, and the actuator's position along the pillar can be adjusted to the proper height on the payload being tested. Land surveying equipment is used to accurately measure the tip deflection of the payload as the actuator applies lateral loads in both directions. Technical data for the systems is listed below.

**Table 6.2.5-1 NSROC Bend Test Fixture Specifications**

Facility	Maximum Load (actuator or load cell)	Maximum Actuator Height	Accuracy of Deflection Readings
WFF	+/- 5,000 pounds	21 feet	0.05 inches
WSMR	+/- 1,150 pounds.	21 feet	0.05 inches



**Figure 6.2.5-1 Bend Test Fixture at WFF**

**6.2.6 Spin Deployment and Separation Equipment (WFF)**

Payloads with deployable booms, nose cones, doors, etc. can be tested for proper operation using the spin deployment and separation chamber at WFF. The rotary table is capable of spinning a payload to a rate of 20 rps while withstanding an imbalance of up to 3000 ft-lb. 5 ft. above the table surface. The chamber is equipped with a heavy-duty Kevlar® tarp around the rotary table for catching deployed components. Also, there are video cameras mounted on the chamber walls for recording and timing the deployment events. Pyrotechnic release



devices can be activated by connecting lead wires through a 20-channel slip ring that allows the table to rotate while maintaining electrical continuity.



**Figure 6.2.6-1: Spin Deployment Chamber at WFF**

The WFF test facility is also equipped with a portable spin table that is used for special deployment tests. These include inverted deployments, during which the spin table is suspended from the high bay bridge crane, and horizontal deployments.

### **6.2.7 Centrifuge Machine (WFF)**

A Genisco Model 1068-2 centrifuge machine is used for component acceleration tests at WFF. It is capable of achieving up to 1000 g acceleration at a radius of 10.5 in. It has 8” of clearance between the 3’ diameter rotary table and the cover.



**Figure 6.2.7-1 Genisco Centrifuge Machine at WFF**

### **6.2.8 Magnetic Test Facility (WFF & WSMR)**

At WFF, this facility is used to conduct magnetic calibration of magnetometers on sounding rocket payloads and to perform functional tests on magnetic attitude control systems. When required, magnetic calibration tests are done - generally for all payloads with magnetometers except those in which the magnetometers are used as roll or yaw indicators. The testing

equipment consists of a three axis, 40 ft. square Braunbek system which is capable of canceling the effects of the earth's magnetic field and then generating a test field in any direction. Technical data are listed below<sup>5</sup>.

- Resolution = 10 nanotesla
- Field magnitude = 0 to 65,000 gamma.

The Magnetic Test Facility (MTF) was developed to support the magnetic testing capabilities for NASA at Wallops Island. The MTF consists of the computer, control software, power supplies, racks, computer desk, analog instrumentation chassis, reference magnetometer, and relay box.

The coil system consists of a 40 foot "Square Braumbek" design to provide the facility with a 6 foot diameter homogeneous field.

The MTF software is designed to interactively operate the three-axis magnetic coil system. The software provides the operator with the ability to control the magnetic coil system either manually or through standardized automated tests. Automated test modes include Zero Bias, Linearity, Cosine Law response, Axis Displacement, and Rotating Field. Other unique tests can be performed if required.

Three channels of analog data, typically corresponding to sensor X, Y, and Z outputs, can be digitized to 14 bit resolution and are sampled, averaged, and stored in computer files for each applied field. The stored data sets are text files which are converted and plotted in Micosoft Excel ® for easy data anaylsis. Payload RF data can also be sent to F-10 for data recording and display. Consult Tables 6.2.8-1 and 6.2.8-2 on the following page for details about the equipment and control capabilities at Wallops.

**At WSMR**, the Magnetic Calibration Facility has the following capabilities:

- 3-axis Station Magnetometer digital readout in milligauss
- 10 foot diameter Helmholtz coil with adjustable vector from zero to > one earth field in any axis.

**Table 6.2.8-1: Instrumentation Available at the WFF Magnetic Test Facility**

<u>Item</u>	<u>Function</u>	<u>Specifications</u>	<u>Model</u>
Proton Magnetometer	Calibration	Range: 20K-120K Gamma Resolution: 0.01 Gamma Accuracy: 0.2 Gamma	GEM System GSM-19
Triaxial Fluxgate Magnetometer	Test Instrumentation	Range: $\pm 100$ K Gamma Resolution: 3 Gamma Orthogonality: 25 Arcmin	EMDS SDM-313
Triaxial Fluxgate Magnetometer	Ambient Sensor (outside)	Range: $\pm 100$ K Gamma Resolution: 3 Gamma Orthogonality: 25 Arcmin	EMDS SDM-313
Payload Magnetometer	Test Instrumentation	Range: $\pm 100$ K Gamma Resolution: 3 Gamma Orthogonality: 1 Degree	Bartington Mag-03MRN
Theodolites	Alignment	Resolution: 20 Arcsec	Dicarlo Theo020B
RF Horn Antenna	Data Receiving	Freq. Range: 1-18 GHz Gain: 7 dB	Emco Model 3115
RF to Fiber-Optic Transmitter	Data Conversion	Freq. Range: .1-5 GHz Watts: 6.4 mW	Ortel 3450A-20

**Table 6.2.8-2: Magnetic Test Facility Specifications**

Physical Dimensions:	
Access Opening	8'8" H x 7'5" W
Static Field Environment:	
Magnitude (each axis)	$\pm 100$ K Gamma
Step Resolution	$\pm 3.7$ Gamma
Stability	$\pm 10$ Gamma/minute for first 30 minutes $\pm 3$ Gamma/minute after 60 minutes
Homogeneity	0.02%, 6 ft. spherical diameter
Dynamic Field Environment:	
Magnitude	+60K Gamma
Frequency	10 Hz, Although 10 Hz to 100 Hz @ 1K Gamma has been performed
Turntable	4' Diameter
Coil Orthogonality	1.8 Arcmin, Calibrated on 9/27/96
Fields	Earth, 0-15 Volts DC, 0-25 Amps Test, (3-Axis) 50 Volts AC, $\pm 8$ Amps Gradient, 15 Volts DC, 6 Amps

### 6.2.9 Spin Balance Facility (WFF, Wallops Island)

There are two large Trebel Balancers in separate buildings (V-55), 800 ft. apart, which are controlled from a third building located between them (V-50). There are also three Gisholt

Balancers (in V-45), which are similar to the one described in Section 7.2.2. The facility is also equipped with a vibration analyzer, which is used to detect and measure mechanical vibrations during balancing. This Spin Balance Facility can perform balancing of hazardous systems including satellite apogee kick motors.

#### **6.2.10 Dark Room (WFF & WSMR)**

The Dark Room includes a rotary light seal, an enlarger, print washer, temperature-controlled water, and pressurized and filtered air to minimize potential dust problems.

#### **6.2.11 Facility Cleanliness (WFF & WSMR)**

The complete facility is air conditioned and pressurized to minimize dust entry.

- High bay measured equivalent to a CLASS 10,000 specification:  
5-50 Microns (6.5 particles per cubic foot)  
Larger than 50 Microns (0.5 particles per cubic foot)
- Clean Tent is 8 feet wide by 19 feet long in the area with "Laminar flow" filtration; it is classified as a Class 10,000 clean room.  
5-50 Microns (3.1 particles per cubic foot)  
Larger than 50 Microns (0.7 particles per cubic foot)
- Low bay is also pressurized, but the large door in the East wall can contaminate this area for extended periods after it has been opened to bring in experiments or supplies.

#### **6.2.12 Targeting (WFF & WSMR):**

Computer generated positions of the sun, stars, or planets for targeting is available.

#### **6.2.13 Optics Capabilities (WFF & WSMR)::**

- 1/100 SUN (Incandescent), 32 arc minute with a 15 inch aperture.
- 50% SUN in lab from SUN TRACKER (dependent upon weather) with a 20 inch aperture. This device is servo driven and can be controlled from the sensor on the tracker or the sensor on the experiment to provide closed-loop operation. If a command link is installed in the payload, pitch/yaw closed-loop dynamic tests can be performed.

- 10 arc second STAR SOURCE (incandescent) with a 20-inch aperture and adjustable brightness.
- Aperture Autocollimator: 16 inch with a one arc second resolution capability and various source patterns and intensities (incandescent). Co-alignment of mirrors, retro-reflections from telescope spectrometers and sensors on experiment payloads.
- Granite Table: 5 feet x 8 feet flat to 100 x 106 inches and capable of being floated on bags for critical alignment techniques requiring low vibration for stability.
- Hydrogen-Alpha Telescope: Direct view and photographs for evaluation and solar target locations.

### **6.3 Payload Testing**

All payloads are required to undergo the following tests in order to be considered flight worthy:

- Static and dynamic balance
- Vibration (sine and/or random)
- Bending
- Mass properties measurement
- Deployments (if applicable).

The results of these tests are presented at the Mission Readiness Review (MRR). Details of each type of test are discussed below.

#### **6.3.1 Static and Dynamic Balance**

The Mechanical Engineer must first determine which payload configuration(s) must be balanced (or measured for imbalance) in order to ensure mission success. The Mechanical Engineer must also provide the Test Technician(s) with the stations of the upper and lower balance planes for placement of balance weights. The payload launch configuration must then be measured for Tip Indicator Runout, which is the amount of lateral misalignment of the payload measured at the nose tip. The payload shall then be balanced such that the criteria in Table 6.3.1-1 are met. It is important to ensure that dynamic balancing is not performed at a spin rate equal to the payload's first natural frequency. This is done to avoid pitch-roll coupling, which can damage both the payload and the balancing equipment.

**Table 6.3.1-1 Static and Dynamic Balance Specifications**

Tip Indicator Runout (in.)	Static Imbalance (oz.-in.)	Dynamic Imbalance (oz.-in. <sup>2</sup> )
<0.25	<300	<20,000

These limits can be surpassed if the payload team, specifically the Performance Engineer, the Mechanical Engineer, and the Mission Manager agree that the vehicle can still be launched successfully. When applicable, the Mechanical Engineer must design the flight weights that act to transfer the effect of the test weights internally

It is also required to perform a check balance of all spinning ACS payloads after flight balance weights have been installed. The acceptable residual imbalance for this operation is defined by the ACS Engineer. Mission managers should schedule extra time to accommodate this requirement.

**6.3.2 Static Load (Bending)**

The Performance and Analysis Engineer must calculate the maximum expected bending moment at the aft end of the payload (payload to motor interface) and predicted tip deflection under this load. The Performance and Analysis Engineer must then supply the Mechanical Engineer with the lateral load necessary to achieve 125% of the bending moment or 50% of the rated capacity of the joints; whichever is greater. This load shall be applied near the forward end of the payload, usually at the first major joint.

It is important to bend the payload about more than one lateral axis, especially if the payload has multiple doors and/or large doors. After the tests are complete, the Mechanical Engineer must provide the Performance and Analysis Engineer with the maximum tip deflection of the payload during each bend test. These data will be used in the flight profile analysis and will be presented at the MRR.

Bend tests shall also be used to measure the compliance of non-standard joints or joints that have been modified significantly.

**6.3.3 Mass Properties**


Every payload must undergo mass properties measurements in both the launch and the control configurations and any other configurations that are critical during the mission; e.g. re-entry, booms in, booms deployed, etc. The following properties will be measured.

- Weight
- Center of Gravity
- Roll Moment of Inertia
- Pitch Moment of Inertia


The Mechanical Engineer must determine the angular orientation of the payload for the pitch MOI measurement in order to obtain the best representation of this value for the Guidance, Navigation and Control Group.

### 6.3.4 Vibration

The launch configuration of every payload must complete vibration testing in order to be considered acceptable for launch. Before any full level tests are conducted in each axis, a 1/2-g Sine Survey must be performed in order to determine payload natural frequencies. This information can be used to limit vibration input and protect payloads and testing equipment from excessive loads. The Mechanical Engineer must determine which vibration tests are required according to the flow charts in Figures 6.3.4-1 and 6.3.4-2.

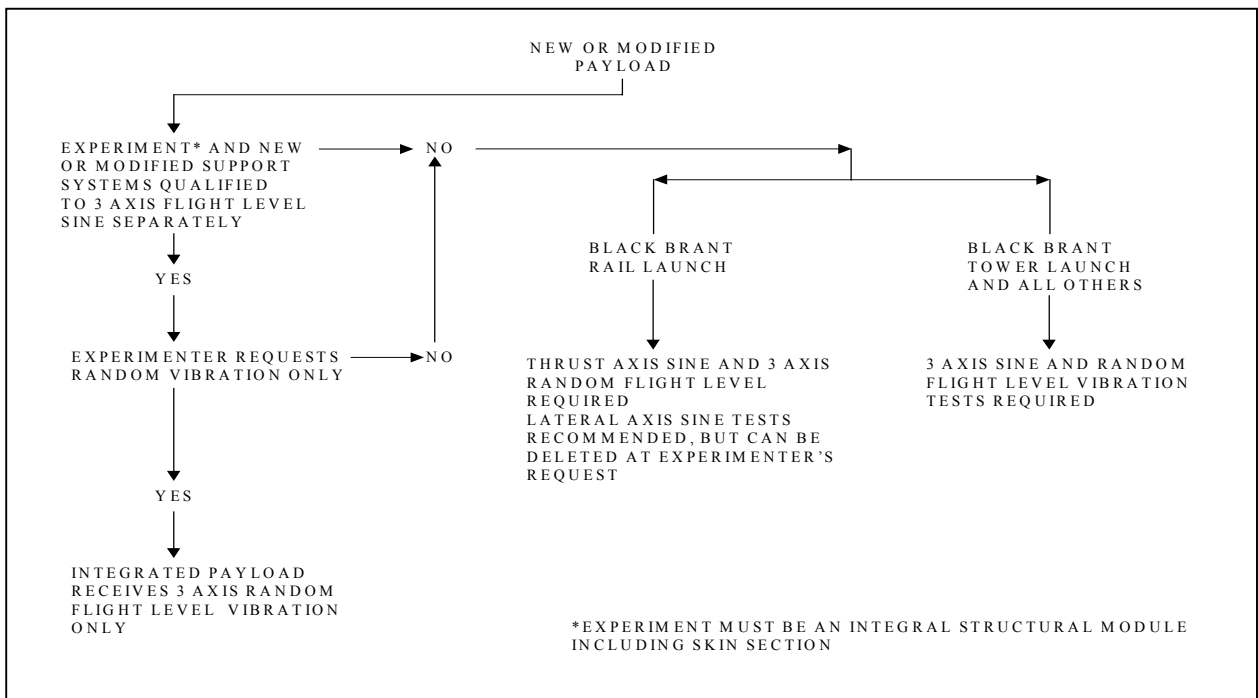

**Figure 6.3.4-1 New or Modified Payload Vibration Testing Flow Chart**

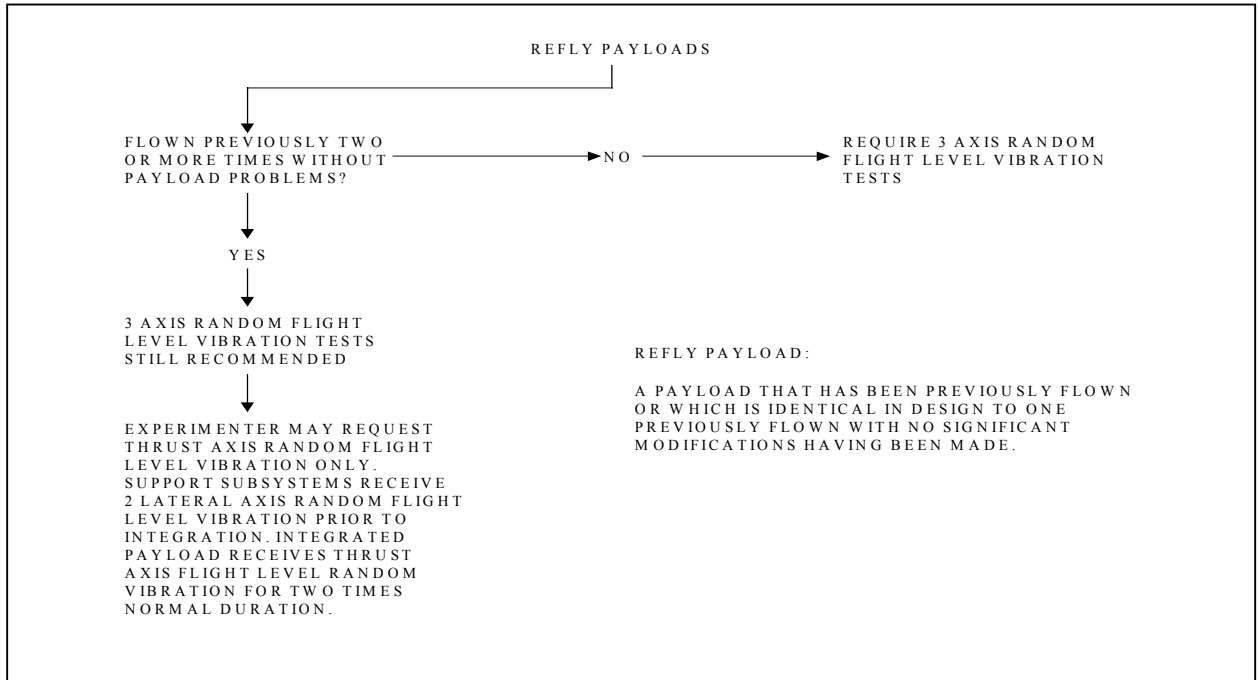

**Figure 6.3.4-2 Refly Payload Vibration Testing Flow Chart**

It is the responsibility of the Mechanical Engineer to provide the Environmental Testing Group with the vibration test levels for a particular payload according to Table 6.3.4-1. It is important to heed the footnote below Table 6.3.4-1 concerning payload bending during lateral vibration.

**Table 6.3.4-1 Vibration Test Levels for New Payload Designs**

	VEHICLE LEVEL ONE	VEHICLE LEVEL TWO	
S I N E	Sweep Rate: 4 oct./min.  <u>Thrust Axis Profile:</u> 3.0 in./s    10-144 Hz 7.0 g        144-2000Hz	Sweep Rate: 4 oct./min.  <u>Test Profile:</u> 3.84 in./s    5-24 Hz 1.53 g        24-110 Hz 3.50 g        110-800 Hz  10.0 g        800-2000 Hz	
	<b>THRUST AXIS ONLY</b>	<b>THRUST AXIS ONLY</b>	
R A N D O M	Duration: 20 sec./axis  <u>Thrust Axis Spectrum:</u> 10.0 grms 0.051 g <sup>2</sup> /Hz 20-2000 Hz	Duration: 10 sec./axis  <u>Spectrum:</u> 12.7 grms 0.01 g <sup>2</sup> /Hz        20 Hz 0.10 g <sup>2</sup> /Hz        1000 Hz (on 1.8 db/oct. slope) 0.10 g <sup>2</sup> /Hz 1000-2000 Hz	
	<u>Lateral Axis Spectrum:</u> 7.60 grms 0.029 g <sup>2</sup> /Hz 20-2000 Hz		



		<b>SAME IN ALL AXES</b>	
<b>T E S T  I N F O</b>	<b>LEVEL 1 VEHICLES</b>	<b>LEVEL 2 VEHICLES</b>	<b>LIMITING BENDING MOMENT</b>
	Single Stage Orion Terrier-Orion Terrier-Lynx Terrier-Malemute	Black Brant V Black Brant IX Black Brant X Black Brant XI Black Brant XII	(in.-lb.) Orion                100,000 Malemute           200,000 Black Brant        300,000  Limit Model 1830 TEAM table to a max. of 240,000 in.-lb. overturn moment.
<p>Note: Input to payload during lateral sinusoidal vibration must be limited during first bending mode via dual control accelerometer at CG of the payload. This is done to avoid exceeding the maximum bending moment at the base of the payload.</p>			

### 6.3.5 Waivers

In the event that a Principal Investigator wishes to exclude or modify one or more of the above payload tests, he or she must submit a request in writing to the Mission Manager. Another member of the mission team may submit the request on the Principal Investigator's behalf. The request shall include an explanation for the exclusion or modification and any other pertinent details. All requests must be reviewed and approved by the Mechanical Engineer, the Mission Manager, and by the NSROC Chief Engineer.

### 6.3.6 Test Times

The following guide may be used for estimating the time required for each test<sup>3</sup>.

- Balance (check, balance and re-check)                1 – 3 days
- Vibration    ½ - 1 day
- Bend Test     ½ - 1 day
- Mass Properties     ½ - 1½ days

## 6.4 Component Testing

A sounding rocket component is any self-contained functional unit comprised of two or more mechanical and/or electrical parts. This includes, but is not limited to, transmitters, batteries, receivers, gyroscopes, etc.

In general, components that are new designs and/or that have never been launched before are required to undergo testing. The following is a list of typical tests that are conducted on sounding rocket components.

- Thermal Cycling
- Vacuum and Thermal Vacuum
- Vibration and Shock
- Acceleration
- Deployment and Separation
- Magnetic Calibration

## SECTION 7: NASA/GSFC/WFF Safety Policy and Responsibilities

This Section provides an overview of GSFC/WFF safety policies, and associated organizational responsibilities, operational procedures, and flight and ground safety rules. Safety is a major consideration in all successful sounding rocket missions - from planning, design and engineering through launch, data recovery and mission close-out. Safety requirements draw upon the unique and exhaustive experience of the Goddard Space Flight Center's Wallops Flight Facility. As an experimental lab under the National Advisory Committee for Aeronautics, it's later role as a research flight facility, and in its current role as a GSFC facility, Wallops has 60 years of experience in sounding rocket operations, design, and technology.

The policies, procedures and references in this Section apply to all mission activities conducted and managed by GSFC/WFF and to all NASA employees, NSROC (NASA Sounding Rocket Operations Contract), contractor personnel, Principal Investigators (PI), and support personnel. Missions conducted at other launch ranges (such as WSMR) will comply with local range requirements, including requirements that are more restrictive; however, policies and procedures described and referenced in this Section will be considered the minimum requirements for all personnel. PIs should discuss safety considerations with their designated Sounding Rocket MM and consult references for detailed design, engineering, operational and procedural guidance.

**Note:** Department of Defense (DOD) personnel adhere to DOD rules; however, they must also adhere to GSFC/WFF policy and guidelines while at WFF, when the rules are more restrictive

NASA/GSFC/WFF and NSROC publications provide detailed safety policies to raise awareness of existing or potential hazards and provide appropriate control techniques:

- *Range Safety Manual (RSM-2002) for Goddard Space Flight Center (GSFC)/Wallops Flight Facility (WFF), dated 28 June 2002.* This manual can be accessed online at <http://www.wff.nasa.gov/~code803/>
- NASA Safety Standards such as NSS 1740.12 for Explosive Safety and NASA-STD-8719.9 for Lifting Devices Safety.
- NASA East/West Range Safety Requirements of EWR 127.
- NSROC Safety and Health Plan, NSROC Quality and Safety document, QS PUB 00001.

## 7.1 Safety Policy

Safety plays an integral role in NASA's quest to expand frontiers in aeronautics and space. As we move into the 21st century, we have designated safety and health as our highest priority. We will not compromise the safety and health of our people and property nor harm the environment. We are working to achieve zero mishaps in the NASA workplace, keeping in mind that every employee's safety and health, both on and off the job, is our concern.

The NASA Agency Safety Initiative (ASI) is aimed at strengthening NASA's capabilities so that safety permeates every aspect of NASA work. By fully implementing this initiative and incorporating safety and health principles and practices into NSROC's daily decision making process, we will maintain our position of leadership in maintaining the safety and occupational health of our work force and the safety of the products and services we provide.

The ASI establishes the NASA safety hierarchy -the order we used to prioritize our safety efforts. The safety hierarchy is:

- **Safety for the public;** we absolutely must protect the public from harm.
- **Safety for astronauts and pilots;** they expose themselves to risk in high hazard flight regimes
- **Safety for employees;** we owe it to our employees to provide them with a safe and healthful workplace.
- **Safety for high value equipment;** we are stewards of the public's trust.

By focusing on the safety of NASA's mission and operations, we will improve quality and decrease cost and schedule

GSFC/WFF will conduct all ground and flight operations with a degree of prudence appropriate for highly hazardous operations and in accordance with sound technological principles. To achieve this objective, three cardinal principles apply:

- It is impossible to completely eliminate human error or system failures; therefore, safety planning and precautions are established to cope with the resulting hazard.
- One preventive measure is insufficient for hazard control. Planning procedures or system requirements shall be established such that a combination of at least two extremely unlikely events must occur to cause an accident.

- Safety is an integral function of each supervisor's responsibilities.

For any mission where these policies cannot be met, the risk will be analyzed and presented in a Risk Analysis Report (See Section 8.4 below), with a recommendation for approval or disapproval, to the Director of Suborbital and Special Orbital Projects Directorate, Code, Code 800.

Again, safety is THE priority for sounding rocket operations. It is inherent in all policies and procedures and an integral part of the GSFC/WFF Quality Assurance and ISO 9001 programs. Responsibility for any given mission is shared by all parties involved.

## **7.2 The Range Safety Organization**

The Director of GSFC is responsible for safety at WFF. The Director of SSOPD, who represents the Director of GSFC, has established a programmatic safety organization and designated safety responsibilities for other organizational elements. The references above describe the safety responsibilities for each organizational component. The Safety Office of SSOPD (Code 803) is responsible for implementing the range safety policies, criteria, and operations at WFF. The Safety Office is the principal safety coordinator for GSFC/WFF sounding rocket missions performed at other ranges.

### **7.2.1 Safety Responsibilities of the Mission Manager (MM)**

The Mission Manager is the primary safety planning point of contact for Principal Investigators. The MM will provide to the Safety Office, no later than 90 days prior to the scheduled launch date, the following data for all new or modified launch configurations:

- Flight Requirements Plan
- Nominal flight trajectory data
- Dispersion data
- Vehicle physical characteristics
- Rocket motor information
- Vehicle structural limitations
- Aerodynamic data
- Wind compensation methods
- Aeroelastic and flight loads analysis
- All hazards associated with the launch operation.

For standard vehicle configurations and payloads, nominal flight trajectory data, dispersion data, and wind compensation methods should be provided two months prior to the scheduled test date. The MM reviews vehicles and payloads to assure criteria and range safety standards are met and refers all exceptions to the Safety Office (Code 803).

Approved safety procedures for vehicles and payloads meeting all range safety standards are published in the Operations and Safety Directive for all campaigns and WFF operations and in the Flight Requirements Plan for other ranges.

### **7.2.2 Safety Responsibilities of the Principal Investigator (PI)**

It is the Principal Investigator's responsibility to become fully acquainted with the safety policies and criteria set forth in the *Range Safety Manual for GSFC/WFF* (RSM-2002) as well as the other safety materials cited in the introduction to this Section.

PIs must design vehicle and payload systems to fully conform with the policies and criteria established by the GSFC/WFF; and must identify any vehicle or payload systems and/or operational requirements that cannot meet the GSFC/WFF and NASA safety policies and criteria.

PIs will provide data to the MM, either through conferences or formal documentation, for safety review. The data will include information on payload systems, descriptions, and requirements of the project operations. PIs must also submit requests for any waivers from prescribed procedures before arriving at the GSFC/WFF. Appendix J details the data required in formal documentation. Appendix J is extracted from the Range Safety Manual for Goddard Space Flight Center (GSFC)/Wallops Flight Facility (WFF) RSM-2002, dated 28 June 2002.

In the event of a mishap, a NASA Mishap Report, Form 1627, will be initiated and forwarded to the WFF Safety Office, Code 803. The Safety Manager or the Operations Safety Supervisor will take reasonable and proper actions to limit or prevent injury to personnel and damage to or loss of equipment and property. Management and safety personnel will issue instructions for any investigation and reports required through the MM.

PIs will be required to provide information requested to fully understand the cause of the mishap and develop recommendations for any subsequent actions.

### 7.3 Ground Safety Plan

The ground safety goal of GSFC/WFF is to minimize the risks to personnel and property involved in the handling, preparation, and launch operations for launch vehicles and payloads. A Ground Safety Plan will be prepared by the Safety Office, Code 803, prior to any launch operations conducted by GSFC/WFF at WFF or other ranges. This plan covers operating variables involving the storage and handling of explosives and propellants, vehicle and payload/experiment assembly, and pad preparations where other than normal procedures are used or operating conditions are particularly hazardous.

The Ground Safety Plan is based on information provided by the Principal Investigator (See Appendix I for details), the Mission Team, and Safety personnel.

**Note:** Ground safety data packages are provided for operations at established ranges: WSMR, Kiruna, Andoya; Ground Safety Plans are provided for operations at WFF, Poker Flat Research Range, and mobile campaigns.

The Ground Safety Plan will typically include information on the following:

- List of all hazards associated with the mission
- Exposure limits for personnel working with hazardous material. The cardinal principle is to limit the exposure to the minimum number of personnel, minimum time, and minimum amount of hazardous materials, consistent with safe and efficient operations.
- Operational restrictions to be observed by personnel during specific tests or operations
- Chemical Systems
- Electro-explosive circuit requirements
- Electrical storm criteria and restrictions on safe operations
- RF restrictions on operations at specified RF levels
- Personnel requirements for safety devices, clothing, and procedures
- Radioactive sources safety requirements
- Pressure vessel safety requirements
- Security warning and control procedures
- Operational control and procedures for all areas and material related to the mission.

## 7.4 Flight Safety Plan

The flight safety goal of GSFC/WFF is to preclude an impact which might endanger human life, cause damage to property, or result in embarrassment to NASA or the U. S. Government. While some degree of risk exists for every mission, each flight must be carefully planned to minimize that risk while maximizing the probability of attaining mission objectives.

Prepared by the Safety Office prior to any launch operation conducted at GSFC/WFF, the Flight Safety Plan describes the quantitative and qualitative aspects of the proposed vehicle flight. For operations at other ranges, any special flight safety restrictions or requirements will be documented in the Flight Requirements Plan or other operations document.

The Flight Safety Plan is based on information provided by the Mission Team (See Appendix I for details) and information provided by NASA/WFF and NSROC engineering, operations, and safety personnel. Details on flight safety criteria are found in the *Range Safety Manual for Goddard Space Flight Center (GSFC)/Wallops Flight Facility (WFF)* RSM-2002, dated June 28, 2002.

PIs are expected to determine their minimum requirements for launch and any requirements that are more stringent than those imposed by the Safety Office. The PI may be requested to participate in the planning for other safety related aspects of the mission.

The Flight Safety Plan will typically include information in the following areas.

### 7.4.1 Impact Criteria:

All flights will be planned in accordance with impact agreements and conducted so that the planned impact or re-entry of any part of the launch vehicle over any landmass, sea, or airspace does not produce a casualty expectancy greater than  $10^{-6}$ . Additionally, an impact probability on private property which might cause damage greater than  $10^{-3}$  (in the case of Poker Flats Research Range (PFRR), must have a Safety Analysis Report (See Subsection 8.5, below) prepared and approved. It must be proven that any of the following conditions will result:

- The re-entering vehicle will be completely consumed by aerodynamic heating.
- The momentum of solid pieces of the re-entering vehicles (such as balloons or parachutes) will be low enough to preclude injury or damage.
- Formal government or private agreements allow the use of the landmass for impact or re-entry.



#### **7.4.2 Overflight Criteria:**

Vehicle overflight of a populated area may only be planned when flight termination capability exists and one or more of the following criteria are met:

- The vehicle is in orbit.
- The probability of a land impact and resultant CE due to an overflight failure does not violate established criteria.
- Formal government or private agreements are established which allow the overflight.
- It is approved in a Safety Analysis Report.

#### **7.4.3 Flight Termination Criteria:**

GSFC/WFF flight safety policy requires a flight termination system in every stage of a launch vehicle unless it is shown that the flight is inherently safe. Inherent safety is determined by probability estimates based on known system errors and qualifying conditions specified in safety regulations.

If a launch vehicle cannot meet the above set of conditions, a flight termination system must be employed whereby thrust may be terminated, stage ignition prevented or delayed, or other means employed to ensure that the impact and overflight criteria are not exceeded.

#### **7.4.4 Flight Termination System Design Requirements:**

The design of a vehicle flight termination system must be submitted to the Safety Office (Code 803) for analysis and approval. The TTS design requirements are found in RCC 319-92 (commonality) or 127-1 ER/WR Range Safety requirements.

#### **7.4.5 Flight Planning Criteria:**

Launch vehicle flight safety is usually associated with the containment of spent stages, hardware, and payload components within planned impact areas. Since the entire set of variables (vehicle aerodynamic/ballistic capabilities, azimuth and elevation angles, wind, air, and sea traffic, and proposed impact areas) is never duplicated, each flight is unique. It is, therefore, imperative that the vehicle design, reliability, performance, and error predictions for each flight case be analyzed by the Safety Office (Code 803) to ascertain the flight-worthiness of each launch vehicle.

#### **7.4.6 Range Clearance Criteria for GSFC/WFF Launch Range:**

GSFC/WFF coordinates flight operations with the Federal Aviation Administration (FAA), the US. Navy, and other organizations, as required, to clear impact areas. The hazard areas

for each rocket are defined and all flight safety criteria must be satisfied before a launch is allowed. No vehicles will be launched without prior clearance.

#### **7.4.7 Operational Procedures:**

Criteria are specified for vehicles with and without flight termination provisions and include wind weighting, shipping, launch limitations, and pre-launch checks.

### **7.5 Safety Analysis Report**

When directed by GSFC/WFF, Safety Analysis Reports are prepared to document safety risks in reference to baseline safety requirements and criteria. These reports include a summary of hard hazard analysis and state the risks that may be incurred by a sounding rocket operation. Safety Analysis Reports are also used to obtain GSFC/WFF approvals of waiver requests for exemptions from safety requirements. A typical Safety Analysis Report includes:

- Introduction and project description
- Safety criteria
- Hazard specifications, preventive measures, and risk assessment for:
  - Ground safety
  - Flight safety
  - Environmental hazards
- Details of all safety procedures

Formal specification, justification, and risks for any waiver requested for exception from safety requirements.

## SECTION 8: Launch Operations

Since its inception in the late 1950's, the NASA Sounding Rocket Program has conducted launch activities throughout the free world. A listing of NASA-supported sounding rocket launch sites which have been and are currently being used is included in Table 9-1.

Sounding rocket launch operations are currently conducted at a number of United States and foreign locations. These facilities vary from very comprehensive launch and payload preparation, launch, recovery, and data collection sites like WFF and WSMR to more austere sites equipped with mobile systems that are tailored to a specific campaign. Although each range has some unique requirements, some commonality exists across all ranges. This Section highlights some of the procedures generally common to all fixed and mobile ranges.

### 8.1 Launch Ranges

Figure 8.1-1 identifies the locations of many US and foreign ranges used for NASA sounding rocket flight operations. Mobile facilities deployed from WFF can augment the established facilities at any range, as needed. Details regarding the sounding rocket program support facilities, range operations, logistics, and visitor information at WFF are in Section 10. Other frequently used fixed ranges are listed below and detailed in Appendix J:

- U.S. Army White Sands Missile Range, Appendix J.1
- Poker Flat Research Range, Appendix J.2
- Andøya Rocket Range, Norway, Appendix J.3
- Esrange, Sweden, Appendix J.4.

**Note:** The principal point of contact for questions regarding procedures and requirements related to use of the various ranges is the sounding rocket Mission Manager (MM).

**Table 8-1: Sounding Rocket Launch Sites Worldwide**

<b>Currently Used Sites</b>	
Andoya, Norway	Fixed Range (Full Facilities)
Kiruna (Esrange), Sweden	Fixed Range (Full Facilities)
Kwajalein, Marshall Is.	Fixed Range (Full Facilities)
Pacific Missile Range Facility, Barking Sands, HI	Fixed Range (Full Facilities)
Poker Flat Research Range, AK	Fixed Range (Full Fac.)
Sondre Stromfjord, Greenland	Mobile Range Site
Vandenburg Air Force Base, CA	Fixed Range (Full Facilities)
Wallops Island, VA	Fixed Range (Full Facilities)
Camp Tortuguera, Puerto Rico	Mobile Range Site
White Sands Missile Range NM	Fixed Range (Full Facilities)
Woomera, Australia	Fixed Range (Partial Facilities)
<b>Infrequently Used Sites</b>	
Antigua, UK	Mobile Range Site
Ascension Island, UK	Mobile Range Site
Barter Island, AK	Mobile Range Site
Camp Tortuguera, Puerto Rico	Mobile Range Site
Cape Parry, Canada	Mobile Range Site
Chikuni, Canada	Mobile Range Site
Coronie, Suriname	Mobile Range Site
Eglin AFB, FL	Fixed Range (Full Facilities)
El Arenosillo, Spain	Fixed Range
Fort Churchill, Canada	Fixed Range (Decommissioned)
Fort Greely, AK	Mobile Range Site
Fort Sherman, Panama	Mobile Range Site
Fox Main, Canada	Mobile Range Site
Karachi, Pakistan	Fixed Range
Karikari, New Zealand	Mobile Range Site
Kerguelen Island, France	Mobile Range Site
Keweenaw, MI	Mobile Range Site
Kourou, French Guiana	Fixed Range (Full Facilities)
Natal, Brazil	Fixed Range (Full Facilities)
Ny- Alsund, Svaldberg	Fixed Range
Point Mugu, CA	Fixed Range (Full Facilities)
Primrose Lake, Canada	Mobile Range Site
Puerto Rico	Mobile Range Site
Punta Lobos, Peru	Mobile Range Site
Red Lake, Canada	Mobile Range Site
Resolute Bay, Canada	Mobile Range Site
San Marco, Kenya	Fixed Range
San Nicholas Island, CA	Fixed Range
Sardinia, Italy	Mobile Range Site
Siple Station, Antarctica	Mobile Range Site
Thumba, India	Fixed Range
U.S.N S. Croatan	Shipboard Range (Decommissioned)
U.S.N S. Range Recoverer	Shipboard (Decommissioned)
Western Test Range, CA	Fixed Range (Full Facilities)

## 8.2 Launch Operations

As always, safety is the priority for NASA operations. Each range has unique safety considerations and all members of the mission team must be familiar with local procedures and the governing protocols that regulate operations. Be alert to signs and signals. Medical facilities may be minimal; and an accident may end the participation in a campaign.

### 8.2.1 Rules To Remember

Rules applicable to most ranges include:

- Range Clearance: Range clearance requests must get to the range well before team and equipment arrival; the MM coordinates clearance requests for all mission team members. Always hand-carry a copy of the request to the range.
- Foreign Nationals: Arrangements for clearance are made with the Mission Manager 60 days before arriving at a range. Paragraph 10.3 outlines the information to be provided to the Mission Manager.
- Vehicle Pass: Most ranges require all vehicles to display a pass to allow entry. All private and rental vehicles will be processed according to local range procedures.
- Alcoholic beverages: Some ranges have designated eating areas where alcoholic beverages are permitted; on all other range property, consumption of alcoholic beverages is usually forbidden.
- Photography: Some ranges have very rigid restrictions on photography by other than designated personnel, but rules vary from range to range. It is best to discuss your photography requirements with the Mission Manager and appropriate range personnel so that arrangements can be made to meet your requirements.

### 8.2.2 Role of the Mission Manager

The launch site is a place where fluctuation is almost inevitable and flexibility is a constant requirement. The Mission Team is focused on operations; the PI's Team is focused on science requirements and everyone is adjusting to the safety and operational rules governing the location. Communications across all areas is of paramount importance and the Mission Manager must be the primary point of contact for those communications. Questions about re-scheduling, range boundaries and buffer zones, flight termination, and transportation should be fielded through him; and the location of everyone participating in the launch should be known to him at all times. He should be constantly apprised of changes made, or delays and problems encountered. The Mission Manager will make sure that unresolved issues are addressed, procedures strictly adhered to, and the overall success of the mission ensured.

### **8.2.3 The Flight Requirements Plan**

The NSROC MM prepares the *Flight Requirements Plan* (FRP) or operations directive (discussed in Section 2). The plan is sent to the range several weeks before the PI arrives at the range. The FRP includes data on the rocket and the experiment, and lists all of the supporting activities that the range must provide for launch and recovery operations. Based on the FRP, the range coordinates its functions. For operations at mobile ranges, the Campaign Manager includes the same information in the *Operations Document*.

### **8.2.4 Test and Evaluation**

Most launch ranges do not have test and evaluation facilities. Therefore, it is imperative that T&E be completed prior to shipment of the experiment and support equipment to the range. Typically payloads are integrated at WFF.

### **8.2.5 The Field Schedule**

Prepared by the Mission Manager, the field schedule lists every major operation. Any change to the Field Schedule should be made through the Mission Manager as promptly as possible.

### **8.2.6 The Preflight Conference**

Shortly after arrival at the range site, the PI and WFF personnel meet with the range personnel in a Preflight Conference. Attendees review the requirements, thoroughly discuss all aspects of range support operations, and coordinate those operations with the PI's activities. Any problems anticipated before or after the launch are resolved or become action items. The PI should present any required changes to the FRP at this Conference.

### **8.2.7 Recovery**

Payload recovery requires extensive prior planning. In the event of a failure, the recovered rocket (or parts) is considered property of NASA until inspection has been completed at the site and the Mission Manager decides that further disassembly or removal will not make an analysis of the failure more difficult.

### **8.2.8 Post-Flight Conference**

Before leaving the field, a Post-Flight Conference is held to present any compliments or complaints regarding field services to range and NSROC personnel. Suggestions for improved operations may also be presented at this time. Based on the information on hand, brief reports on the success of the flight are presented and any known anomalies are reviewed.

### 8.3 Foreign Ranges

The use of foreign ranges entails several additional responsibilities and procedures for the PI. Although the scientific and technical procedures are similar to those by U.S. ranges, the use of foreign ranges requires shipping, travel, communications, and housing arrangements which pose additional challenges. For example, special consideration regarding the coordination of data acquisition sites or special communications provisions may be required. The SRPO is experienced in the use of foreign ranges and any special provisions those ranges may require. Ranges at Andøya, Norway, and Esrange, Sweden, discussed in Appendix J and Appendix K.4, provide an idea of the types of facilities available. Figure 8.3-1 shows the range at Woomera, Australia - a fixed range with partial facilities. NASA operations at this range are augmented by mobile range systems provided by WFF.



**Figure 8.3-1. Range Facilities at Woomera, Australia**

#### 8.3.1 Experimental Techniques

Some experimental techniques such as chemical releases, onboard radioactive sources, and explosive payloads, require additional coordination with the U.S. Department of State and foreign governments. Adequate time must be built into the schedule to allow for obtaining the necessary authorizations.

### **8.3.2 Travel & Lodging**

The Mission Manager can supply current information on available lodging and travel, including rates and distance from the site. PIs are responsible for their travel and lodging arrangements.

### **8.3.3 Access**

Access to foreign ranges is controlled by the foreign government or other institutions and their requirements must be adhered to. The Mission Manager can advise on proper procedures. Current passports and visas are mandatory when visiting foreign ranges.

### **8.3.4 Foreign Nationals**

The host country controls access to foreign ranges by other foreign nationals.

### **8.3.5 Export Control**

It is the Mission Manager's responsibility to ensure that transfers are consistent with NASA Headquarters Program Office policies. Export Control Milestones must be included in their program/project plans to ensure that export control matters are considered and resolved in advance of prospective shipping or transfer dates. In addition, all Mission Managers shall, in consultation with the CEA, ensure that international activities under their direction include:

- Appropriate safeguards for commodities, technologies, and software exported or transferred pursuant to international agreements.
- Provisions of necessary technical information to the CEA to facilitate sound determinations regarding validated export license requirements, activity-specific documentation, and the submission/completion of such documentation, where necessary;
- Adequate lead time for the submission, processing, and receipt of validated export licenses, where necessary.

### **8.3.6 Postal Service**

Usually a good postal service is available. The Mission Manager can provide the postal address of the foreign range. Internet access is usually available at all ranges.

### **8.3.7 Shipping**

Shipment of equipment from the U.S. to foreign ranges must be cleared through U. S. Customs as must equipment shipped from foreign countries to the U.S. Clearing Customs



can be somewhat difficult and time consuming. Documentation must be correct and must fully describe the shipment; the shipment must be made well in advance of its need in a foreign country. The Mission Manager can provide information regarding shipping and should be kept fully informed of all shipments.

#### 8.4 Mobile Range Operations

Mobile range operations are conducted worldwide in locations dictated by the scientific experiment requirements. WFF and White Sands Missile Range (WSMR) Launch and Mobile Range Capabilities are included in Tables 8.4-1 and 8.4-2 on the following pages. WFF has the mobile support systems necessary to establish and support sounding rocket campaigns anywhere in the world.

**Table 8.4-1 WFF Launch Facilities**

Launcher Name	Description	Boom Length	Rockets Launched
50 K Launcher	Rated as a 50K-pound maximum design load launcher with a movable environmental shelter	45'	All Sounding Rocket Program vehicles.
Atlantic Research Corporation (ARC) Launcher	Rated as a 20K-pound maximum design load launcher with a movable environmental shelter.	38'	All Sounding Rocket Program vehicles.
20 K Launcher	Rated as a 20K-pound maximum design load launcher with a movable environmental shelter.	37'	All Sounding Rocket Program vehicles.
MRL Launcher	Rated as a 20K-pound maximum design load launcher with a movable environmental shelter.	37'	All Sounding Rocket Program vehicles.
AML 4K Launcher	Rated as a 4K-pound maximum design load twin boom launcher	20'	Orion class Sounding Rocket Program vehicles
US Navy Vandal Launcher	Currently supports U.S. Navy VANDAL Program and is specifically designed for use by Vandals only.		

**Table 8.4-2 WSMR Launch Facilities**

Launcher	Shelter	A/I	Type	Length	Maximum Capacity	Current Capacity	Diameter	Rockets Launched	M
MRL L630	Yes 75 ft. long Movable at LC 36	A	NASA UH Rail	37 ft. NASA Standard Guide Rail	7.5K	7.5K	14 – 31:	BB, TBB, TO, TUO	No
ATHENA L-738	Yes 100 ft. long Movable at LC 36	As	NASA UH Rail	48 ft. extrud Alum. Guide Rail	25K	16K	14 – 31”	VV, TBB, TO, NC, TUO	No
Thiokol 4.3K Dual	No at LC 35 & not installed	I	Rail UH	20 ft. NASA Standard	4K	4K	17”	Nike Tomahawk	Yes
Starbird L-763	No	I	NASA UH Rail	42 ft. NASA Standard Guide Rail	50K	16K	14 – 31”	Castor 1/M30	No
Aries L702	Yes 60 ft. tall	I	Stool	44.4 ft.	54K		31-54”	M56/XM 100/M47	No
Navy Movable	Yes Tent	I	NASA Standard UH	40 ft NASA Standard Guide Rail	10K	10K	14-31”		Yes
Standard HAD	No	I	NASA UH Rail	27 ft. NASA Standard Guide Rail	4K	4K	14 – 18”	Talos Terrier/T O	Yes
Nike M39	No	I	Rail Top Load	35 ft. NASA Std/Sandia	14K	14K	14-31”		Yes
A/I: Active/Inactive Diameter: Diameter of rockets that can be launched. Capacity: Launcher capacity in pounds Launchers that are not active can be activated within 30 – 60 days Current Capacity: Reflects rail limitation M: Movable						BB: Single Stage Black Brant TBB: Terrier Black Brant TO: Terrier Orion TUO: Taurus Orion			

The selection and use of a mobile range entails a high degree of planning, coordination, and cooperation. Figure 8.4-1a/b/c shows an operation at the mobile range at Sondre Stromfjord, Greenland. This range and the range at Woomera, Australia (Figure 8.4-2), exemplify the adaptability of mobile operations in extreme conditions. While rainfall at each range is similar, the temperatures are very different - the Australian range is a hot desert and the Greenland range has arctic conditions. In spite of the differences, many requirements are similar. For example, environmental protective covers and other similar ground support equipment is required in both locations, and similar rockets are flown.



**Figure 8.4-1a Range Support Operations in Sondre Stromfjord, Greenland**




**Figure 8.4-1b: Extreme Conditions:  
Sondre Stromfjord.**



**Figure 8.4-1c: Observations: Northern  
Lights at Sondre Stromfjord.**

Figure 8.4-2 shows a Black Brant IV astronomy payload being prepared for launch during the Supernova investigation in Woomera, Australia. Note the portable shelter to provide a controlled environment. This type shelter can be used worldwide.

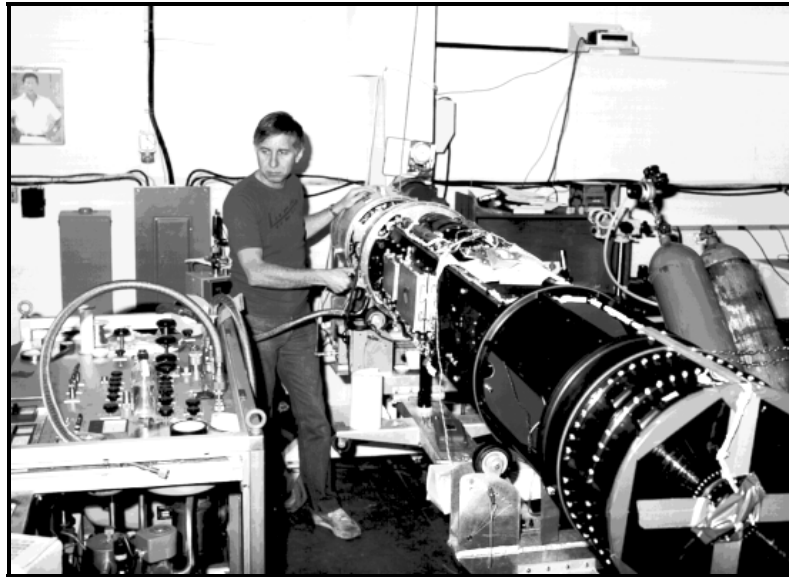

**Figure 8.4-2 Black Brant IV Payload in Woomera, Australia**

Mobile ranges generally have some common characteristics that provide challenges to the efficient and effective planning required to conduct sounding rocket campaigns. Some of the more challenging conditions are:

#### **8.4.1 Remote Locations**

Mobile ranges are frequently located in remote foreign locations with limited habitability and sparse land, sea, or air communications. Transportation to and from the range, including customs clearance for equipment and personnel, becomes a major planning consideration. Living conditions are sometimes inconvenient or sparse. Adequate medical facilities may not be readily available. A medical emergency may mean a quick trip home.

#### **8.4.2 Harsh Environment:**

Mobile ranges may be located in harsh environments which work against the proper functioning of equipment. Careful consideration of range environmental conditions during the planning, design, integration, and T & E phases is necessary.

#### **8.4.3 Limited Technical Facilities:**

Because ranges frequently have very limited or no technical facilities, systems for communications, launch preparation, launch, command and control, data collection, and

recovery must be provided. Payloads must be ready to go when they reach the range because T & E facilities are non-existent.

#### **8.4.4 Limited Communications:**

Communication circuits on the range and to and from the range may be fewer than desired. This places additional burdens on communication planning so that at least minimum communications requirements can be met. Campaigns at mobile ranges frequently involve observers in other locations or countries; sparse communications may prohibit optimum communications among all participants in an experiment.

## SECTION 9: Data Processing and Analysis

WFF data processing and analysis systems and facilities provide a wide range of support for sounding rocket planning, engineering, operations, data acquisition and analysis. This Section describes those systems and the procedures by which PIs can obtain the support required for individual experiments.

### 9.1 Computer Systems

General purpose computer support is provided by GOULD/SELConcept/32 minicomputers organized into a Data Processing Installation (DPI). The three DPI systems most directly involved in sounding rocket projects are the Real-Time Computer System, Data Reduction Computer System, and the Engineering Computer System:

#### 9.1.1 Real-Time Computer System (RTCS, RTBS)

Used primarily as a range safety tool, the RTCS, RTBS are two systems in a network of tracking radars and communications-supporting control and data display facilities in the Range Control Center. The single point, failure-tolerant system accurately predicts the impact point of any vehicle launched from WFF and is capable of transmitting separate command functions to the research vehicle. These can vary from stage firing of the vehicle to actuating command devices aboard the experimental payload. In those instances when the PI requires recovery of experimental equipment, the RTBS, RTCS directs recovery forces to the recovery point.



**Figure 9.1.1-1 RTBS, RTCS in Operation at WFF**

Many of the research vehicles launched from WFF have no guidance or destruct capability. This type of rocket must be launched in a way that compensates or offsets the impact of any forces acting on it that could cause it to deviate from a desired flight path. To aid range safety personnel in determining the compensation required, wind weighting is performed by the redundant Wind Weighting computers in the Range Control Center. Data from

meteorological system sensors, chaff, and radio Sondes are used to obtain a profile of winds from ground level to an altitude of 129,000 feet and to compute the position of the launcher to compensate for the wind forces acting on the launched vehicle. In addition to providing range safety information, the Wind Weighting Computers can provide look angles (slave angles in elevation and azimuth that enable the radar or telemetry antenna to acquire the target) to any radar or telemetry installations which have compatible formats.

### **9.1.2 Data Reduction Computer System (DRCS)**

The primary application of the DRCS is to perform flight radar data reduction operations. Data from other positional sources such as optics, telemetry, and special sensors can be incorporated. The DRCS also processes some telemetry data such as attitude data reduction from the Space Vector Corporation MIDAS platform gyros flown on many sounding rocket missions.

### **9.1.3 Engineering Computer System (ECS)**

The ECS directly supports sounding rocket programs. ECS analytical tools and capabilities include:

- Launch Vehicle Physical Properties
- Aerodynamic Characteristics Determination
  - Subsonic, Supersonic, Hypersonic.
  - Linear, Non-linear
  - Launch Vehicles, Re-entry Bodies.
- Flight Simulation (Endo-Exoatmospheric)
  - Launch Vehicle Performance (Flight Trajectory)
  - Launch Vehicle Stability (Static, Dynamic)
  - Launch Vehicle Guidance
  - Payload Dynamics, Attitude Control
  - Special Studies (Magnetic Field, Solar Eclipse Geometries)
- Flight Loads & Structural Analysis
  - Launch Vehicle Vibrational Modes
  - Aeroelastic Effects
  - Vehicle/Payload Mechanical Design
- Thermal Analyses (1,2, & 3-D Nodal Networks)
  - Aeroheating (Ascent and Re-entry)

- Spacecraft Thermal Studies
- Shuttle Bay Payload Thermal Analysis

#### **9.1.4 Launch Status Review System (LSRS)**

The LSRS, in association with the ECS, provides a capability for monitoring launch conditions during operations at White Sands Missile Range. Wind profile data, launcher settings, and simulated trajectories are transmitted to WFF in real time and captured in IBM PC/AT computers. Selected data are then sent to the ECS for display. Wind profile data may be used as input to various flight simulations for guided vehicles; the output is then used to assess control system behavior and vehicle flight characteristics.

#### **9.1.5 Special Purpose Computers**

Many special purpose microcomputer and minicomputer installations support sounding rocket experiments and operations. The sounding rocket MM can advise which ones may be the most helpful in correlation with the experiment.

#### **9.1.6 Digital Telemetry Facility**

The Digital Telemetry Facility is linked by cable to the telemetry receiving stations and readout stations. This Facility:

- Conditions, synchronizes, and processes vehicle and payload performance serial PCM data
- Digitizes and processes analog FM data
- Formats digital tapes
- Displays selected data or parameters in binary, decimal and engineering units
- Prints data in selected formats or provide data tapes for further reduction by the processing lab or the PI.

### **9.2 Obtaining Data Processing and Analysis Support**

Arrangements for data processing and analysis support should be incorporated into pre-mission planning and coordinated with the MM.

#### **9.2.1 Flight Requirements Plan (FRP)**

Basic data processing and analysis requirements are provided by the PI in the FRP which was described in Section 2. The FRP provides the processing lab with the background information needed prior to processing the data. It should describe the test and the expected results to be obtained. The test schedules and data requirements must be defined in advance



to assist in planning the workload and manpower requirements. The PI submits the data requirements for the FRP to the MM. Basic information needed for the FRP includes:

- Project identification including the job order number
- Priorities, deadlines, and deliveries
- Special processing needs (such as refraction calibration)
- Location and time of the experiment
- Objectives of the experiment
- General processing requirements (raw versus smoothed data, reference coordinates)
- Data dissemination requirements (hard copy reports, graphics, magnetic tape).

The data sampling requirements, which consist of timing intervals of the raw data as it is collected and the intervals to be processed, must be clearly spelled out. Other pertinent information may be needed depending upon the data requirements.

### **9.2.2 Instrumentation (Telemetry)**

Real-time and post-flight data is normally requested through the Project Instrumentation Engineer. Real-time requirements for displays and paper charts are submitted to the Instrumentation Engineer who, in turn, prepares the necessary ground station support request. Basic RF link and airborne telemetry specifications are provided in the FRP. The ground station support request forms vary with each launch site and are revised and submitted to the facility supervisor prior to the final launch countdown.

Actual flight events, established after quick-look review of real time data, frequently require changes to the post-flight data playback needs of the Mission Team. These changes are submitted, via the Instrumentation Engineer, to the ground station personnel. Playback operations are observed to evaluate completeness and accuracy of the data.

### **9.2.3 Non-Standard User Requirements**

Should the PI require a technical capability not currently available at WFF, he/she can either provide WFF with the computer programs to do the job, or WFF can develop the capability. If WFF is to develop the capability, the PI should contact the SRDM and outline the requirements.

### **9.2.4 Positional Data Policy**

In order to standardize the earth model between impact prediction and data reduction, the WGS84 Ellipsoid/North American Datum of 1983, is used for data products generated by the WFF Data Processing Installation. Wallops Internal Publication WFF-822.95-001, Geodetic

Coordinates Manual for NASA Goddard Space Flight Center, Wallops Flight Facility, January 1995, contains coordinate information on WFF and other sounding rocket and balloon facilities.

### **9.2.5 Data Dissemination**

All data are disseminated through the Mission Manager. The data package produced for sounding rocket missions includes all tracking and telemetry data supporting the mission and processed to meet the requirements of the PI. A typical telemetry report to the PI is by digitized magnetic tape or CD ROM in the format shown in Appendix K.

A typical positional data report is in the format shown in Appendix K.


Prior to dissemination, all material will have gone through a quality control review to determine that all data is of satisfactory quality and the request has been fulfilled.

### **9.2.6 Data Retention**

Analog and/or Digital telemetry flight data tapes are retained for five years. Telemetry data is currently digitized and stored on CD-ROM in PTP format (Appendix K) and will be retained by the NSROC EE group for five years. For positional data, original data paper records are retained for one year and all unedited/unsmoothed data measurements are retained for a period of four years. Tapes of processed positional data are retained indefinitely.

## Section 10: Wallops Flight Facility

Located on the Delmarva Peninsula approximately 80 miles northwest of Norfolk and 40 miles southeast of Salisbury, WFF sprawls over some 6000 acres of prime property on Virginia's scenic Eastern Shore. U.S. Route 13 runs the entire length of the Peninsula and connects with major routes along the Atlantic Coastline from Maine to Florida. WFF is linked with the Norfolk-Hampton Roads area by the Chesapeake Bay Bridge Tunnel.

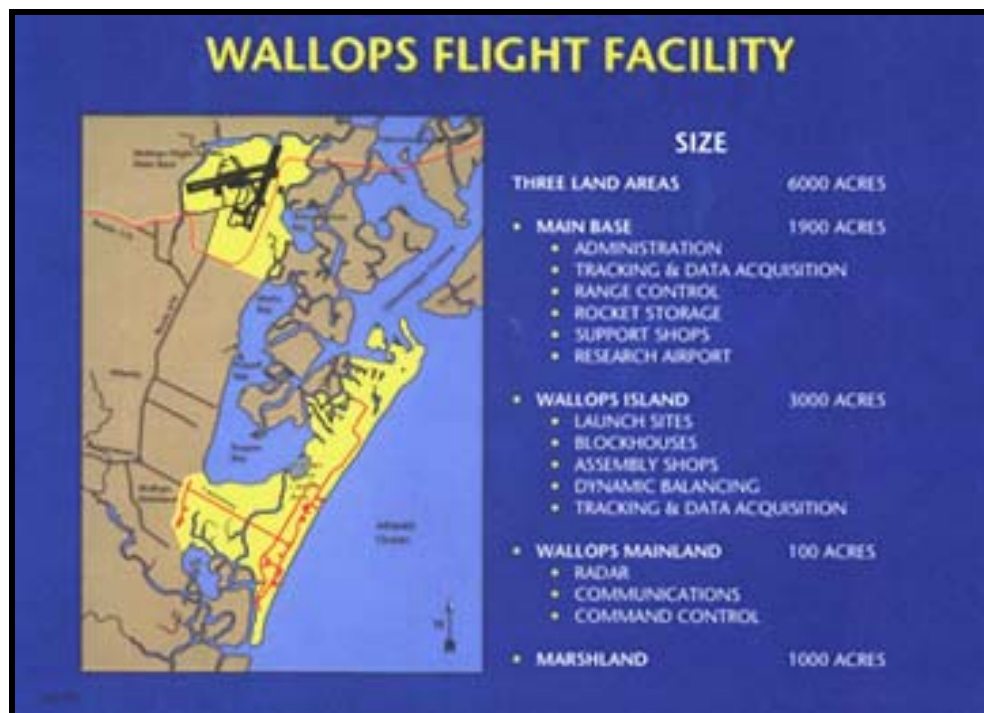

**Figure 10-1: Wallops Flight Facility Map**

WFF consists of three separate properties: the Main Base, the Wallops Island Launch Site and the Wallops Mainland.

The Main Base (Figure 10-2) houses the management and engineering offices supporting NASA's sounding rocket, balloon and aircraft projects. This includes administrative offices, technical service support shops, rocket inspection and storage areas, an experimental research airport, laboratories, the main telemetry building, the Range Control Center, a large computer complex, and telemetry, radar, and communication facilities. The National Oceanographic and Atmospheric Agency, the U.S. Navy, the U.S. Coast Guard and the Virginia Commonwealth Space Flight Authority have tenant activities at WFF



**Figure 10-2. Wallops Main Base**

The Wallops Island Launch Site: Named after 17<sup>th</sup> Century surveyor John Wallop, Wallops is a barrier island (six miles long and one-half mile at its widest point), located two miles off the coast of Virginia, approximately seven miles southeast of the Main Base. A causeway and bridge permit easy access across the two miles of marsh and Intercoastal Waterway that separate it from the mainland.. Launch sites, assembly shops, blockhouses, dynamic balancing facilities, rocket storage buildings, and related facilities are resident on the Island. Training and development of support personnel for the Navy's AEGIS Command is conducted there as well. Figure 10-3 is a photo of Wallops Island looking north.



**Figure 10-3. Wallops Island**

Wallops Mainland, a half-mile strip of land at the opposite end of the causeway behind the Island, is the location for the long-range radars and communications transmitter facilities, and a Dobson Total Ozone Measurement Facility. Figure 10-4 is a photo of the Wallops Mainland.



**Figure 10-4. Wallops Mainland**

Geographically, WFF is located at  $37.8^{\circ}$  N  $75.5^{\circ}$  W. Detailed geodetic locations for all WFF facilities are found in the Wallops Internal Publication WFF-822-95-001 *Geodetic Coordinates Manual for NASA Goddard Space Flight Center, Wallops Flight Facility*, January 1995.

## **10.1 WFF Sounding Rocket Program Support Facilities**

The primary support functions for the NASA/WFF Sounding Rocket Program include sounding rocket design, fabrication, mechanical testing, telemetry, environmental testing, assembly, launch, tracking, recovery, and acquisition and analysis of scientific information; all have been thoroughly discussed in previous sections of this Handbook. The facilities which house those functions are used by scientists and engineers from the research centers of NASA, foreign and U. S. Government agencies, colleges and universities, and the worldwide scientific community.


### **10.1.1 Engineering Support Facilities**

Engineering support includes analytical, feasibility, and design studies; payload, vehicle, and recovery system engineering; rocket and payload test and evaluation; and data analysis. Engineering and system design, development, and acquisition for data and communications systems, radar and optical systems, telemetry systems, and mechanical systems are performed by

a highly qualified organization of engineers and technicians supported by laboratories, test, calibration, and data processing facilities.

### **10.1.2 Payload Integration Laboratory**

The Payload Integration Laboratory includes facilities for complete (mechanical and electrical) payload build-up and checkout. The laboratory can support the processing of multiple payloads simultaneously and includes telemetry ground stations and clean room facilities. Work areas are available for the PI and staff to perform pre- and post-integration preparation and checks. The telemetry ground station is capable of supporting multiple links for all systems flown. Figure 10.1.2-1 shows a complex plasma physics payload undergoing integration in the Payload Integration Laboratory at WFF.

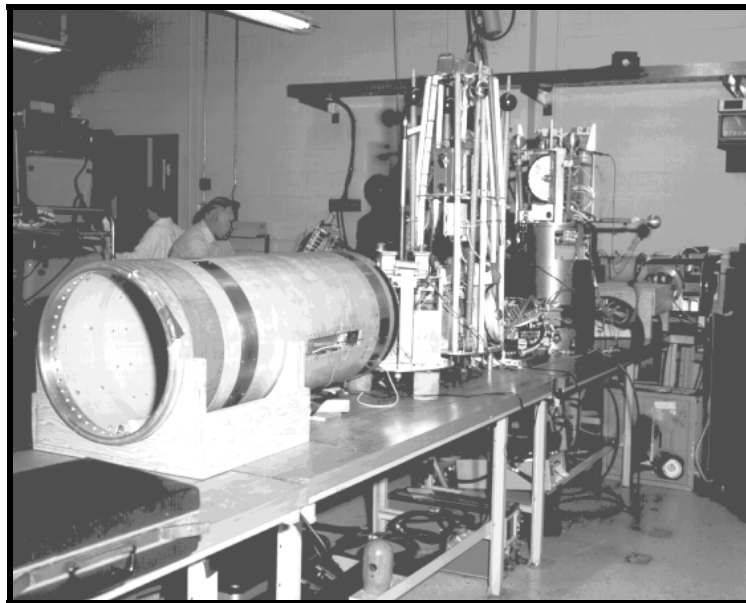


**Figure 10.1.2-1 Plasma Physics Payload (36.015 UE) During Payload Integration**

### **10.1.3 Environmental Testing Laboratory**

Environmental testing of completed payloads, sub-assemblies and components is accomplished at WFF Environmental Testing Laboratory where flight readiness is verified through exposure to intended flight environments. This laboratory is adjacent to the Payload Integration Laboratory for convenience in payload handling and logistics. A detailed discussion of environmental testing policies and test equipment is included in Section 6.

### 10.1.4 Payload Construction

The WFF Mechanical and Electrical Fabrication Facility (See Figures 10.1.4-1 and 10.1.4-2 on the following page) is fully capable of fabricating sounding rocket payloads and launch vehicle components, including electrical components such as circuit boards, cables, and custom interfaces between experiment components and standard sounding rocket components. Assembly of payload and system components, calibration, and integration of the experiment and sounding rocket vehicle is accomplished in WFF facilities.

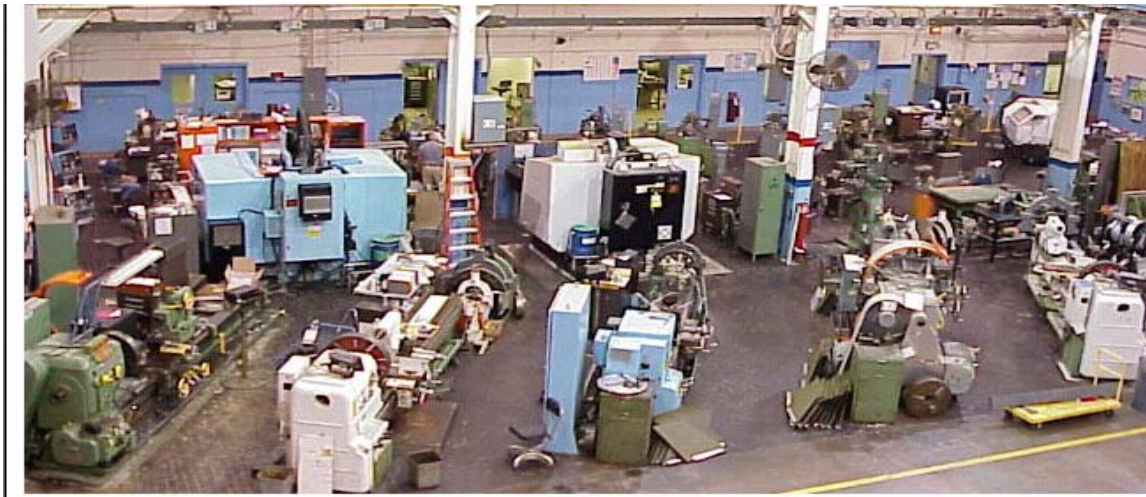

**Figure 10.1.4-1: Wallops Flight Facility Machine Shop – Electrical Section**



**Figure 10.1.4-2: A Nose Cone is Streamlined in the Machine Shop**

### 10.1.5 Computer Support

Special purpose and general purpose computer systems at WFF perform preflight and flight mission analysis, data reduction, vehicle and payload analysis and support flight operations. Section 9: Data Processing and Analysis explains the available capabilities in more detail and outlines how PIs obtain support.

### 10.1.6 Range Operations

WFF has a comprehensive, flexible complement of operational facilities providing a broad range of support for sounding rocket, balloon, and aircraft operations. These include:

- **Meteorological Facilities:** Wind data systems support launch operations. Fixed, balloon borne and optical sensors are available for coordinating experimental data with existing conditions. WFF is supported by NOAA data systems and a local forecasting office. The Ionospheric Sounding Rocket Station provides detailed data on the ionospheric characteristics; the Dobson on the Wallops Mainland provides total ozone measurements; and a lightning detection system tracks lightning conditions over a wide area of the eastern United States.
- **Ground Tracking Facilities:** Several mobile and fixed radars and related data reporting facilities support sounding rocket missions. The radars operate in the S, C, Ku, and X-bands.



**Figure 10.1.6-1: WFF Fixed Radar System**

- **Telemetry Facilities** support real time telemetry acquisition and data reduction and provide data for detailed analysis.
- **Launch Facilities** are located on Wallops Island. Facilities include pad, launcher, checkout, fire control and communications systems. Facilities can support all NASA sounding rockets. The range extends easterly over the Atlantic Ocean.



- A variety of Payload Recovery Facilities are available. Water recovery operations are coordinated through the local U.S. Coast Guard in Chincoteague, Virginia. Homing systems, which can be included in the payload package, assist recovery.
- Aircraft and Airfield Support is available by contacting the WFF Range & Mission Management Office (Code 840). This includes surveillance, transportation, optical and visual data acquisition, and telemetry support. There are three runways ranging in length from 4,000 to nearly 9,000 feet. Control Tower support is available. Procedures for use of the airfield are contained in 830-AOM-0001, *Aircraft Operations Manual* (AOM).
- An extensive network of Command, Control, and Communications Facilities support launch operations. Several facilities support specific aspects of the operation such as radar plots and quick-look data acquisition. The focal point, however, is the Range Control Center on the Main Base which controls launches, range safety, command/destroy functions, timing, and mission countdowns through instantaneous communications with all involved activities. Limited quicklook data acquisition, graphic displays, and video views of launches are available.
- Mobile Range Facility and Rocket Launching. Mobile range instrumentation vans support payload, meteorological, radar, control, telemetry, communications, power, and data functions. These facilities serve as mobile launching and tracking stations which can be set up as land based stations throughout the free-world or on board a large ship, such as an aircraft carrier, for experiments in international waters. Vehicle and payload handling and storage facilities are available. A number of launchers, variable in both elevation and azimuth, which can safely handle multi-stage vehicles are also available. All instrumentation vans are air-conditioned and are provided with communications, local intercom, precision timing, and data displays.

## 10.2 Working at Wallops – Rules, Regulations, and Logistics

Although the normal WFF workday is 0800 to 1630, Monday through Friday, the facility has a flexible work schedule that permits employees to start as early as 0600 or work as late as 1800. Work at other times must be coordinated with the MM to ensure access to required facilities and the availability of necessary technical personnel. All U.S. Government holidays are observed.

### 10.2.1 Access

Access to the Main Base and the Island/Mainland complex is controlled by guarded gates, PIs should provide the MM with identification, dates of visit, and vehicle identification prior to arrival so that necessary passes can be obtained. The Main Base Receptionist is a necessary first stop for any WFF visit.

### 10.2.2 Accommodations

Housing, cafeteria, mail and express delivery, and telephone service is available at WFF:

- **Housing:** Two dormitories on the Main Base provide accommodations for NASA and other personnel on temporary duty at WFF. Use must be coordinated through the Mission Manager. Many visitors prefer to use local motels and restaurants, available year round on neighboring Chnincoteague Island. The MM will be happy to assist with housing arrangements for either venue.
- **The Main Base Cafeteria** is located in Building E-2. Breakfast (0700 to 0900) and lunch (1100 to 1300) are served. The Williamsburg Room may be reserved for special events including group evening meals.
- **Mail and Delivery Services:** The WFF Post Office is located on Anderson Road, behind the Cafeteria and adjacent to the E-series administrative buildings. Express Delivery Services are provided by United Parcel Service (UPS) and Federal Express daily.
- **Transportation:** Once clearance is approved through the Main Base Receptionist, personal transportation is generally used on the Base. Transportation of sounding rocket components by truck is arranged by the MM. Packing, shipping/receiving and material handling of equipment and components is detailed in Section 10.2.4 below.
- **Telephone:** Collect and Credit Card long distance telephone services are available for non-government personnel through the WFF Operator by dialing "O". Federal Telecommunications System (FTS) service is available to U. S. Government users for official calls only. Access to the system is by dialing "9".

- **Airport:** Chartered and private aircraft, both propeller and jet types, may land for business purposes at the WFF Airport, with prior approval clearance. The nearest commercial airports are in Salisbury, Maryland, (40 miles north) and Norfolk, Virginia, (70 Miles south). Rental cars are available at these locations.
- **Medical:** In addition to the WFF clinic, medical and emergency rescue capabilities, WFF maintains communications with local emergency rescue and medical organizations. Major medical and hospital facilities in the surrounding Virginia and Maryland counties include Shore Memorial Hospital in Nassawaddox, Virginia, and Peninsula Regional Medical Center in Salisbury, Maryland. Emergency rescue and ambulance support is available from surrounding communities.
- **Police:** WFF maintains communications with local police and fire fighting organizations. Police protection in the immediate area surrounding Wallops is provided by the Accomack County Sheriff's Office and the Virginia State Police.
- **Fire Protection:** WFF maintains its own Fire Department. Additional support is provided by volunteer fire companies located in Accomack County. They are equipped with modern fire trucks, fire fighting equipment, ambulances and state certified volunteer staffs to provide emergency first aid, and rescue and fire fighting services.
- **The NASA/WFF Gift Shop** is located in Building E-2, adjacent to the Cafeteria.
- **The NASA Visitors Center and Gift Shop** is located on Route 175 about one mile from the WFF Main Base Gate. The Visitors Center includes a collection of spacecraft and flight articles as well as exhibits about America's Space Flight Program. Special movies and video presentations can be viewed and special events such as model rocket launches are scheduled. No admission is charged. The Visitors Center Observation Deck will be open to the public in June of 2005.
- Smoking is prohibited in all GSFC buildings.

### 10.2.3 WFF – Safety Rules and Regulations

Safety restrictions and industrial safety procedures are strictly enforced at WFF. Safety requirements for the design, development and operation of sounding rocket operations are discussed in detail in Section 8 of this Manual; the WFF Safety Manual is available on request or can be downloaded from the WFF website at <http://www.wff.nasa.gov>. Safety questions should be directed to the MM or specific facility personnel. Facility managers will advise on proper procedures for such things as safety shoes, hard hats, gloves, safety glasses, static dissipative clothing, and masks.

**Note:** Obey control signals around high-energy emitters such as radar.

#### **Precaution**

PI's should notify the Mission Manager of the need for overnight operation of equipment or for the necessity of not turning on equipment during their absence. Never radiate from equipment without approval from the Mission Manager. It could be hazardous and wipe out someone else's test or day-to-day operational activities.

### 10.2.4 Shipping/Receiving and Transportation of Sounding Rocket Components

The following address should be used for shipment to WFF; be sure to include the name and code number provided by the MM in Freight Destination Address.

**Mailing Address:** Name (NASA Code Number)  
NASA  
Goddard Space Flight Center  
Wallops Flight Facility  
Wallops Island, Virginia 23337

**Freight Destination Address:** Name (NASA Code Number)  
NASA  
Goddard Space Flight Center  
Wallops Flight Facility  
ATTN: Receiving, Building F-19  
Wallops Island, VA 23337

**Delivery services** generally include:

- **Motor Freight Truck Services:** All cargo and freight is received at Building F-19, except Class "A" and "B" explosives, and certain other hazardous material requiring advance notice of shipments. Inbound shipments of Class "A" and "B" explosives, and other designated hazardous materials will stop and park at the WFF Main Gate. Any shipment

requiring the delivering carrier's equipment to fly placards, and all shipments tendered as truckload, require RESHIP information in advance of delivery.

**Normal receiving hours:** 0800 to 1430 (for truckloads) and 0800 to 1600 (for partial loads), Monday through Friday, excluding holidays.

- **Air Freight Services** to and from WFF is provided by Federal Express, Emery Worldwide, Bax Gloval, T.F. Boyle, Roadway Express and Roberts Express.
- **Packing:** The PI is responsible for packing and unpacking the experiment and associated equipment. The MM can furnish additional information on packing criteria upon request. Alcohol, explosives, corrosives, flammables and radioactive sources must be packaged separately. Radioactive sources require prior approval from the WFF Safety Office. Batteries must be packaged separately from electrolytes. Squibs are normally sent in separate containers. If squibs are included in a payload, the payload container must be marked to indicate squibs, and sent as a hazardous shipment.
- **Material Handling Equipment:** Forklifts, overhead hoists, and dollies are available for use at WFF. All material handling equipment must be operated by WFF personnel. Any special equipment must be furnished by the PI.
- **Customs:** Any international shipment should be routed through the Port of Baltimore. Notify your MM prior to shipment for coordination with US Customs clearance authorities.

### 10.3 Foreign Nationals

Foreign nationals who need to visit WFF or other launch facilities - particularly White Sands Missile Range - must provide information to the MM regarding their visit(s). The following information should be received 60 days before a planned visit to allow for processing time and avoid delays in facility access and participation in the project:

- Project identification
- Name in full, rank, title, position
- Other names previously or currently used
- Nationality
- Previous or current dual nationalities

- Date/place of birth
- Purpose of visit and justification
- Special qualifications of visitor
- Present and prospective address in United States
- Location(s), date, time and duration of proposed visit(s)
- Sponsoring organization
- Passport number; Visa number
- Security clearance status, clearing agency, and degree
- Status (i.e., foreign national or immigrant alien)
- Height (inches)
- Weight (pounds)
- Color
- Color eyes
- Social Security Number as applicable
- Emergency contact address and telephone number
- Local or U.S. address while at WFF


## **APPENDICES**

## APPENDIX A: SCIENCE REQUIREMENTS DATA PACKAGE

### NSROC ENGINEERING OFFICE

PO BOX 99, WFF  
WALLOPS ISLAND, VA 23337-0099  
757.824.1484

757.824.2567 Fax

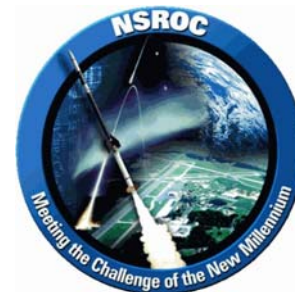

**Mission Science Contact:** \_\_\_\_\_

NSROC designs (or modifies) science structures and support systems based on the physical properties, desired flight performance requirements, power, event timing, pyrotechnic, signal handshaking, and channel monitoring/sampling requirements of the desired science package (payload). The following information is required from Mission Science for each payload (main, mother, daughter, etc.) proposed. A comprehensive data package containing all science information is required before a complete design can be established.

### Electrical Engineering

- List of Instruments to be flown.
- Voltage and current requirements for each instrument.
  - Instruments requiring power at lift-off or by timer function?
  - Minimum and maximum voltage required?
  - Current limiting protection provided in the instrument?
  - Are there power sharing issues?
- List of science booms (if any) and micro switch(s) monitor requirements.
- Handshake signal requirements for each instrument (major frame, etc.).
- Matrix requirements
  - System word length (8--16 bits/word, analog data resolution up to 12 bit/word)
  - Symmetrical or non-symmetrical data sampling requirements
- Complete list of data channels required (All analog data channels must be conditioned to 0-5v).
  - Type of channel (serial, analog, counter, parallel, asynchronous, time-event) with label names (sciHV, sci15v, etc.).
  - Desired minimum sample rate (SPS) of each channel.
  - Stipulate if symmetrical sampling of the channel is required.
  - Stipulate if contiguous sampling is required.
  - For Serial:
    - Stipulate multiplexing if used (typical design is one wire-one channel)
    - Stipulate single ended or differential (reflect on pin-out)
  - For Counter:
    - Stipulate single ended or differential (reflect on pin-out)
    - Stipulate reset mode
  - For Parallel:
    - Stipulate pin for MSB on Parallel
    - Stipulate read, strobe

NOTE: If not all channels have been defined allow for the maximum number of spare channels required, again with desired sample rates.

If the science package includes its own encoding or Baseband system the following information is required.

- The encoder output must be adjustable for deviation setting.



- Baseband requirements
  - System must have capability to interrupt the instrument output and send a calibrated tone to the transmitter. This tone should be a calibrated amplitude that will be used for receiver and recorder\* calibration set-up. This calibration should be controlled from the GSE, through an umbilical line. It is recommended that the experimenter provide output amplitude adjustment capability designed for 75-Ohm load impedance and voltages of up to one volt RMS.

\*Note a Data Tape model DTR-6, -8, or -16 recorder must be used for Baseband recording.
- Wire pin-out of each interface connector.
  - Connector size, type, sex (experiment side, 15,25,37-cannon, hard-mounted/pigtail, etc.)
  - Power and ground requirements (pin 1-28v, pin2- pwr gnd, etc.)
  - PCM timing signals (major frame sync, word clock, etc) If in doubt as to what signals, narrow the list to the maximum signals needed and include all on the interface connector (after fully defined, use only what is needed on the science side of the connector). Stipulate if data line requires shielded cable, twisted pair, coax type, etc. (gnd which end?). All of this needs to be defined for each instrument.
- Flight Events list (all timer controlled science/experimenter events with turn-on requirements such as altitude or time)
- Altitude protected events
- ACS controlled or up-link command controlled requirements
- Special position determination requirements: GPS, Doppler, strobe lights
- GSE/Umbilical requirements
  - External Experiment Switching
  - External Experiment Monitoring
  - Special umbi requirements (Fiber Optic, RS232, etc)
  - Special launcher power requirements (3 phase 220 VAC)
- Miscellaneous - Any Special requirements such as an attitude gyro, solar aspect sensor, lunar aspect, magnetometer, or high resolution time tagging should be also be specified. Special testing/calibration such as magnetometer calibration, corona, etc. If the science package structure is to be furnished by WFF accurate dimensions of the instrument(s) in addition to the connector information will be required for hardware placement and wiring of the structure.

## Guidance Navigation and Control

- Guidance desired?
- Attitude Control desired?
  - Stabilization: Two (payload spun) or Three Axis?
  - Attitude Requirements:
    - Pointing/rate requirements?
    - Jitter requirements?
    - Drift requirements?
  - Uplink Command required?
    - Instrument generated signal Interface to ACS required?
    - Maneuvering requirements?
  - Outgassing requirements?
  - Nozzle location or firing restraints?
  - Post-flight attitude data required?

## **Mechanical Engineering**

If Mission Science plans to provide a complete structure (structure, mounted instruments, and skin) the following is required.

- Mechanical Interface
- Mass Properties (Weight, CG, MOI)
- Special Testing
- Required Roll Rates (parameters for Boom deploy, etc.)
- Updated Drawing (includes openings-doors, etc.)
- Metal Finish required
- Shutter Door Required
- Crush Bumper
- Experiment pyrotechnics
- Magnetic Cleanliness

If NSROC will provide the structure and skin the following is required.

- All physical Characteristics
  - Instrument(s) size, dimensions, and Weight & CG, drawings w/ connector locations, clearance required for connectors, mounting hole patterns & sizes, (Boxes, Booms, etc.)
  - Desired location of instruments (accessibility/doors)
  - Out-gassing requirements
  - Experiment interfaces (umbilicals, nozzles, and access ports, etc.)
  - Acceptable science view characteristics
- Separation velocities
- Special Testing
- Required Roll Rates (parameters for Boom deploy, etc.)
- Metal Finish required
- Shutter Door Required
- Crush Bumper
- Experiment pyrotechnics
- Magnetic Cleanliness

If NSROC will provide the skin section only the following is required.

- Mass Properties of the hardware and structure (Wt. & CG)
- Mechanical interface with skin section
- Experiment interfaces (umbilicals, nozzles, and access ports, etc.)
- Acceptable science view characteristics
- Separation velocities
- Special Testing
- Required Roll Rates (parameters for Boom deploy, etc.)
- Metal Finish required
- Shutter Door Required
- Crush Bumper
- Experiment pyrotechnics
- Magnetic Cleanliness
- Outgassing requirements

### **Performance Analysis**

- Trajectory Information
- Desired Altitude
- Desired Time above a given Altitude
- Apogee
- Dynamic issues?
- Time line issues?
- Impact range

### **Vehicle Systems**

- Launch range
- Ground support requirements (payload handling)
  - Thermal requirements on launcher
- Altitude
- Recovery required

**The following information is required if Mission Science desires specific test or range facility support.**

- What are the Estimated dates for Science Integration & Testing (I & T)?
- What are the Hazardous Material requirements?
- Are there Thermal requirements on launcher?
- What are the Ground Support requirements (payload handling) during I & T & launch range?
  - Clean room environment for assembly / testing?
  - Purging gasses (Type of Gas, % Purity and amount required) for assembly / testing?
  - Cooling gasses (Type of Gas, % Purity and amount required) for assembly / testing?
  - Special Power Requirements (A.C. / D.C.) ?
  - Special Environmental Testing Facilities required (Magnetometer Calibration, Vacuum testing of system(s) / components, boom / sensor deployment testing, etc.) ?
  - Special GSE requirements?
  - Special Payload Environmental Control Requirements (boxing of the payload for humidity and temperature control) during Pre-launch and Launch operations?
  - Requirements for handling of Non-launched / Aborted Launch Mission flight hardware, hazardous materials?
  - Computer / Communications Requirements?

## **Appendix B: Principal Investigator's Data Package for Mission Initiation Conference (MIC)**

1. **Description** of scientific objectives and list of specific instruments.
2. **History** of the experiment including number of times the experiment or a similar one has flown, giving flight history and any modifications of previously flown payloads.
3. **Outline diagram** with station numbers including weights, center of gravity, moment of inertia data, deployable elements, doors, booms, nose cones, etc., if available.
4. **Structures and Mechanisms**
  - a) Payload Structure
  - b) Payload Housing
  - c) Openings
  - d) Doors
  - e) Booms - Antennas
  - f) Special Mechanisms
  - g) Hardware and Structures to be Fabricated at WFF.
5. **Outgassing requirements**, magnetic material sensitivity, radio frequency interference susceptibility.
6. **Time/Altitudes** of all experiment related events.
7. **Instrumentation – Telemetry**
  - a) Power Required
  - b) Quantity and Bit Rate of RF Links
  - c) Transmitter(s)
  - d) Antenna
  - e) Commutator(s)
  - f) Squib Circuits
  - g) Monitors
  - h) Aspect Sensors
  - i) Magnetometers

- j) Accelerometer
- k) Radar Beacon
- l) Power
- m) Uplink

**8. Vehicle**

- a) Performance
- b) Minimum Altitude Required
- c) Coning Angle Acceptable
- d) Despin
- e) Special Systems
- f) Type Nose Cone
- g) Pointing Requirements

**9. Flight qualification/operational status** of experiment's subsystems, new flight items or deviation from previously qualified systems.

**10. Restrictions, precautions, special requirements, limitations** for environmental testing of integrated payload.

**11. Range Support**

- a) Telemetry Ground Station
- b) Tracking Requirements
- c) Special Ground Support Equipment: Clean Tent, Temp Constraints, Purge, etc.
- d) Recovery

**12. Launch Conditions**

- a) Launch Range
- b) Time of Day
- c) Azimuth
- d) Launch Angle
- e) Window
- f) Special Conditions – Restraints – Go/No-go Criteria

13. **Unique or special range requirements** including special checkout or support equipment. (Long lead time items)
14. **Radioactive Sources** - Payload/Calibration or Hazardous Materials
15. **List of Specific Minimum And Comprehensive Success Criteria.** If the flight is part of a launch series, criteria must be specified for each individual launch. Requirements should include such things as apogee, time above altitude, pointing, coning, roll rate, etc., as appropriate.
16. **List of Contacts,** Titles, Address, Telephone Numbers.

## Appendix C: RDM Data Package

*(This package is a follow-up to information initially provided by Mission Science in the MIC Questionnaire.)*

**Mission Science Contact:** \_\_\_\_\_

NSROC designs (or modifies) science structures and support systems based on the physical properties, desired flight performance issues, power, event timing, pyrotechnic, signal handshaking, and channel monitoring/sampling requirements of the desired science package (payload). The following information is requested from Mission Science for each payload (main, mother, daughter, etc.) proposed. A comprehensive data package containing all science information is requested before a complete design can be established.

### Electrical Engineering

- List of Instruments to be flown
- Voltage and current requirements for each instrument
  - Instruments requiring power at lift-off or by timer function?
  - Current limiting protection provided in the instrument?
  - Are there power sharing issues?
- List of science booms (if any) and micro switch(s) monitor requirements
- Handshake signal requirements for each instrument (major frame, etc.)
- Matrix requirements
  - System word length (8--16 bits/word, analog data resolution up to 12 bit/word)
  - Symmetrical or non-symmetrical data sampling requirements
- Complete list of data channels required (All analog data channels must be conditioned to 0-5v)
  - Type of channel (serial, analog, counter, parallel, asynchronous, time-event) with label names (sciHV, sci15v, etc.)
  - Desired minimum sample rate (SPS) of each channel
  - .Stipulate if symmetrical sampling of the channel is required
  - Stipulate if contiguous sampling is required
  - For Serial:
    - Stipulate multiplexing if used (typical design is one wire-one channel)
    - Stipulate single ended or differential (reflect on pin-out)
  - For Counter:
    - Stipulate single ended or differential (reflect on pin-out)
    - Stipulate reset mode
  - For Parallel:

Stipulate pin for MSB on Parallel

Stipulate read, strobe

**NOTE:** If not all channels have been defined allow for the maximum number of spare channels required, again with desired sample rates.

If the science package includes its own encoding or Baseband system, the following information is required.

- The encoder output must be adjustable for deviation setting
- Baseband requirements:

System must have capability to interrupt the instrument output and send a calibrated tone to the transmitter. This tone should be a calibrated amplitude that will be used for receiver and recorder\* calibration set-up. This calibration should be controlled from the GSE, through an umbilical line. It is recommended that the experimenter provide output amplitude adjustment capability designed for 75-Ohm load impedance and voltages of up to one volt RMS.

**NOTE:** A Data Tape model DTR-6, -8, or -16 recorder must be used for Baseband recording.

- Wire pin-out of each interface connector
  - Connector size, type, sex (experiment side, 15,25,37-cannon, hard-mounted/pigtail, etc.)
  - Power and ground requirements (pin 1-28v, pin2- pwr gnd, etc.)
  - PCM timing signals (major frame sync, word clock, etc) If in doubt as to what signals, narrow the list to the maximum signals needed and include all on the interface connector (after fully defined, use only what is needed on the science side of the connector). Stipulate if data line requires shielded cable, twisted pair, coax type, etc. (gnd which end?). All of this needs to be defined for each instrument.
- Flight Events list (all timer controlled science/experimenter events with turn-on requirements such as altitude or time)
- Altitude protected events
- ACS controlled or up-link command controlled requirements
- Special position determination requirements: GPS, Doppler, strobe lights



- GSE/Umbilical requirements
  - External Experiment Switching
  - External Experiment Monitoring
  - Special umbi requirements (Fiber Optic, RS232, etc)
  - Special launcher power requirements (3 phase 220 VAC)
  
- Miscellaneous –

Any Special requirements such as an attitude gyro, solar aspect sensor, lunar aspect, magnetometer, or high resolution time tagging should be also be specified. Special testing/calibration such as magnetometer calibration, corona, etc. If the science package structure is to be furnished by WFF accurate dimensions of the instrument(s) in addition to the connector information will be required for hardware placement and wiring of the structure.

### **Guidance Navigation and Control**

- Guidance desired?
  
- Attitude Control desired?
  - Stabilization: Two (payload spun) or Three Axis?
  - Attitude Requirements:
    - Pointing/rate requirements?
    - Jitter requirements?
    - Drift requirements?
  - Uplink Command required?
    - Instrument generated signal Interface to ACS required?
    - Maneuvering requirements?
  - Outgassing requirements?
  - Nozzle location or firing restraints?
  
- Post-flight attitude data required?

### **Mechanical Engineering**

If Mission Science plans to provide a complete structure (structure, mounted instruments, and skin) the following is required.

- Mechanical Interface
- Mass Properties (Weight, CG, MOI)
- Special Testing

- Required Roll Rates (parameters for Boom deploy,etc.)
- Updated Drawing (includes openings-doors, etc.)
- Metal Finish required
- Shutter Door Required
- Crush Bumper
- Experiment pyrotechnics
- Magnetic Cleanliness

If NSROC will provide the structure and skin the following is required.

- All physical Characteristics
  - Instrument(s) size, dimensions, and Weight & CG, drawings w/ connector locations, clearance required for connectors, mounting hole patterns & sizes, (Boxes, Booms, etc.)
  - Desired location of instruments (accessibility/doors)
  - Out-gassing requirements
  - Experiment interfaces (umbilicals, nozzles, and access ports, etc.)
  - Acceptable science view characteristics
- Separation velocities
- Special Testing
- Required Roll Rates (parameters for Boom deploy,etc.)
- Metal Finish required
- Shutter Door Required
- Crush Bumper
- Experiment pyrotechnics
- Magnetic Cleanliness

If NSROC will provide the skin section only the following is required.

- Mass Properties of the hardware and structure (Wt. & CG)
- Mechanical interface with skin section
- Experiment interfaces (umbilicals, nozzles, and access ports, etc.)
- Acceptable science view characteristics
- Separation velocities
- Special Testing

- Required Roll Rates (parameters for Boom deploy, etc.)
- Metal Finish required
- Shutter Door Required
- Crush Bumper
- Experiment pyrotechnics
- Magnetic Cleanliness
- Outgassing requirements.

### **Performance Analysis**

- Trajectory Information
- Desired Altitude
- Desired Time above a given Altitude
- Apogee
- Dynamic issues?
- Time line issues?
- Impact range

### **Vehicle Systems**

- Launch range
- Ground support requirements (payload handling)
- Thermal requirements on launcher
- Altitude
- Recovery required

The following information is required if Mission Science desires specific test or range facility support:

When will Science prefer to integrate? Where?

- What are the Hazardous Material requirements?
- Are there Thermal requirements on launcher?
- What are the Ground Support requirements (payload handling) during I & T & launch range?
  - Clean room environment for assembly / testing?
  - Purging gasses (Type of Gas, % Purity and amount required) for assembly / testing?
  - Cooling gasses (Type of Gas, % Purity and amount required) for assembly / testing?
  - Special Power Requirements (A.C. / D.C.)?

- Special Environmental Testing Facilities required (Magnetometer Calibration, Vacuum testing of system(s) / components, boom / sensor deployment testing, etc.) ?
- Special GSE requirements?
- Special Payload Environmental Control Requirements (boxing of the payload for humidity and temperature control) during Pre-launch and Launch operations?
- Requirements for handling of Non-launched / Aborted Launch Mission flight hardware, hazardous materials?
- Computer / Communications Requirements?

## Appendix D: Principal Investigator's Data Package For A Design Review

Vehicle No. \_\_\_\_\_

1. Brief description of experiment.
2. Block diagram and all pertinent schematics and detailed drawings.
3. Outline diagram including estimated weights, center of gravity, moments of inertia (best data available).
4. History of experiment including flights, problems and failures, number of times experiment or similar one has flown, giving flight number.
5. Specific criteria (times/altitudes, etc.) of all experiment related events.
6. Pointing requirements including:
  - ACS
  - Coning
  - Spin
  - Azimuth
  - Elevation
7. Launch window requirements.
8. Comprehensive mission success criteria, include a statement of vehicle performance, i.e. \_\_\_\_, lb. to \_\_\_\_KM apogee or, \_\_\_\_lb, above \_\_\_\_KM for \_\_\_\_seconds,
9. Minimum success criteria, include a statement of vehicle performance, i.e. , \_\_\_\_lb. to \_\_\_\_KM apogee or, \_\_\_\_lb above \_\_\_\_KM for seconds.
10. Support requirements including special considerations, i.e., real-time readouts, gases, environmental control.
11. Flight qualification/operational status of experiment's subsystems. Where there are any new flight items or deviations from previous qualified system, include all pertinent documentation.
12. Describe all redundant systems.
13. List history of items to be flown
14. Principal Investigator's go-no-go launch criteria (preliminary minimum success).
15. List experiment/instrumentation interface requirements including power, control/timing, data, power bus protection, etc.

## Appendix E: Principal Investigator's Data Package For A Mission Readiness Review

Vehicle No. \_\_\_\_\_

1. Description of experiment.
2. Block diagram and all pertinent schematics and detailed drawings.
3. Power requirements including short circuit protection and corona precautions.
4. Outline diagram including weights, center of gravity, moments of inertia data.
5. History of the experiment, flights, problems, failures.
6. Specific criteria (times/altitudes, etc.) of all experiment related events.
7. Pointing requirements including:
  - ACS
  - Coning
  - Spin
  - Azimuth
  - Elevation
8. Launch window requirements.
9. Comprehensive mission success criteria; include a statement of vehicle performance, i.e., \_\_\_ lb. to \_\_\_ KM apogee or, \_\_\_ lb. above \_\_\_ KM for \_\_\_ seconds.
10. Final minimum success criteria; include a statement of vehicle performance, i.e., \_\_\_ lb. to \_\_\_ KM apogee or, \_\_\_ lb. above \_\_\_ KM for \_\_\_ seconds.
11. Support requirements including special considerations, i.e., real time readouts, gases, environmental control.
12. Flight qualification/operational status of experiment's subsystems. Were there are any new flight items or deviations from a previous qualified system, include all pertinent information, documentation and test data.
13. Describe all redundant systems and list how they are tested.
14. Principal Investigator's master field check-off list with designated responsibilities.

15. Principal Investigator's Go-No-Go launch criteria.
16. List any special requirements in the event of a scrubbed mission.
17. List any post-flight requirements.
18. Provide a testing and integration malfunction log including corrective actions for the experiment system/subsystems.
19. List of all discrepancies still in the system to be corrected.
20. Summarize all suspect items in the experiment system/subsystem.

## **Appendix F:**

### **Descriptions & Flight Performance Characteristics for NASA Sounding Rockets and Special Projects Launch Vehicles**

This appendix describes the various NASA sounding rocket launch vehicles and their performance. Special Projects Launch Vehicles are flight vehicles in a developmental status, vehicle systems that will be used only once, or systems presently in use by other organizations that will not be taken over for use at NASA.

The following pages describe those vehicles currently used in the NASA Sounding Rocket Program at Wallops Flight Facility, Wallops Island, Virginia.



## F.1 Black Brant V Launch Vehicle (21.XXX)

### General

The Black Brant V (BBV) is a single-stage solid propellant sounding rocket developed by Bristol Aerospace, Ltd. in Winnipeg, Canada. There is a 3-fin version (VB) and a 4-fin version (VC). Figure F.1-1 shows the Black Brant VC (4 fin) vehicle.



Figure F.1-1: Black Brant V Launch Vehicle

### Vehicle Performance

The 26 KS 20,000 Black Brant V rocket motor produces an average thrust level of 15,596 pounds and an action time of 32.42 seconds. The primary diameter of the Black Brant V is 17.26 inches and it is 210 inches long. Loaded weight of the motor including hardware is 2,803 pounds which includes 2243 pounds of propellant.


### Payloads

The standard payload configuration for the Black Brant V vehicle is 17.26 inches diameter with a 3:1 ogive nose cone shape. Payload length for the Black Brant V is limited to approximately 200 inches and weight is limited to approximately 1200 pounds. Because of the relatively high dynamic pressures, bulbous (larger than 17.26 inches diameter) payloads cannot be accommodated on the Black Brant V vehicle. The SPARCS VII can be flown on this vehicle. See Section 5 for information regarding SPARCS VII.

Standard hardware systems that are available for Black Brant V motors include aft recovery systems for 750 lb. or 1000 lb. recovered weights. An Ogive Recovery System Assembly (ORSA) for the same weight ranges, payload separation systems (including a High Velocity Separation System) and despin systems are also available. These units are modular "stackable" such that a great deal of flexibility exists to meet experiment requirements.

**Performance Graph**

Performance parameters for the Black Brant VC MK1 are shown in Figure F.1-2.

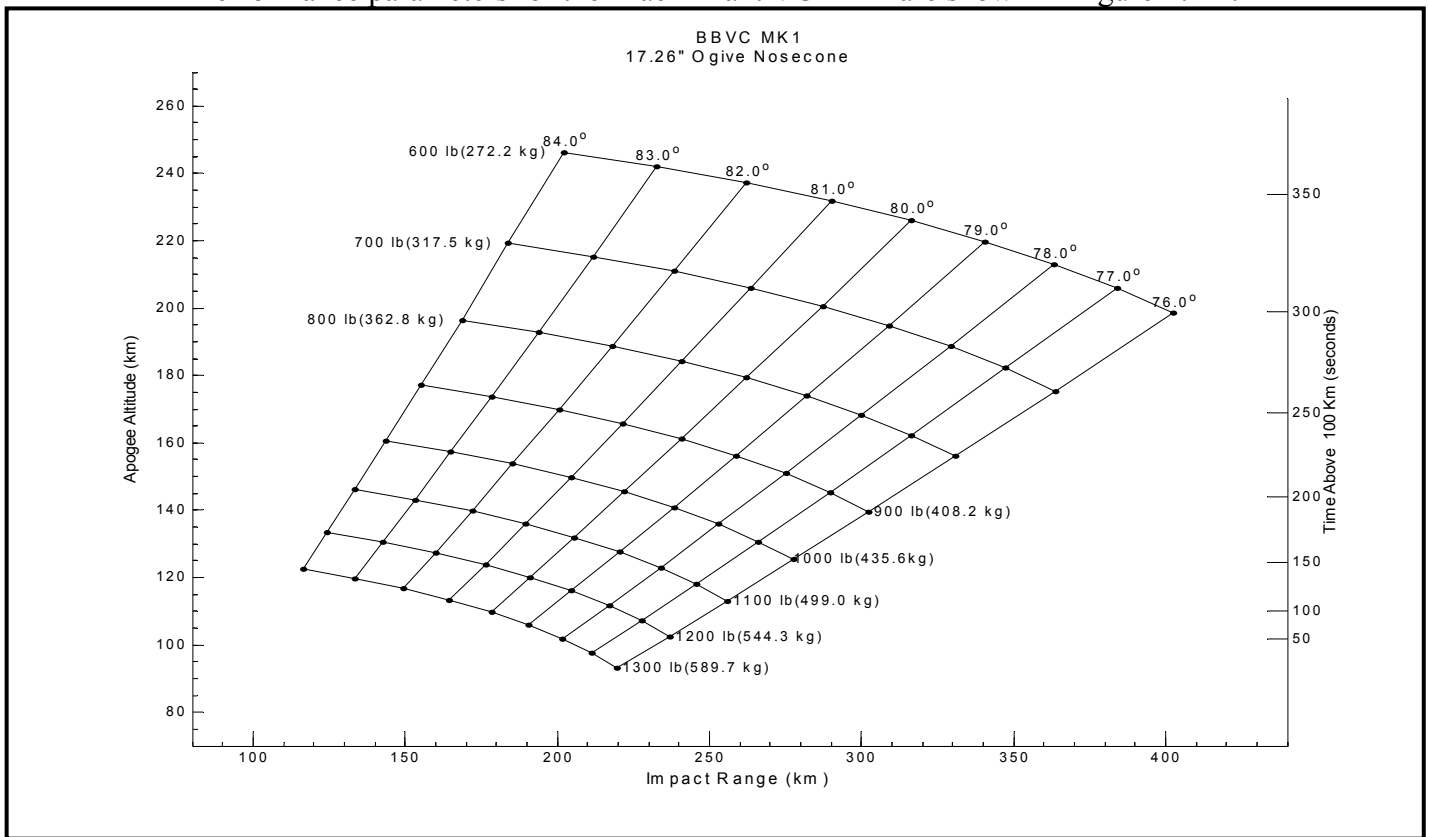

**Figure F-1-2: Black Brant VC MK1 Launch Vehicle Performance**

## F.2 Terrier-Malemute (29.XXX)

### General

The Terrier-Malemute launch vehicle is a high performance two-stage vehicle used for payloads weighing less than 400 pounds. The first stage booster consists of a Terrier MK 12 Mod 1 rocket motor with four 340 square inch fin panels arranged in a cruciform configuration. The Terrier booster has an overall diameter of 18 inches. For a payload weight of 200 pounds, the longitudinal acceleration during the boost phase is 26g's. The second stage propulsion unit is a Thiokol Malemute TU-758 rocket motor which is designed especially for high altitude research rocket applications. The external diameter of the Malemute is 16 inches. Figure F.2-1 shows the Terrier-Malemute vehicle.



Figure F.2-1: Terrier-Malemute Vehicle

### Vehicle Performance

The average thrust is 9,604 pounds. The maximum thrust level is approximately 14,200 pounds which results in a maximum longitudinal acceleration during second stage burning of 32g's for a 200 pound payload. Liftoff weight of the Terrier-Malemute launch vehicle, less payload, is approximately 3260 pounds. This vehicle is usually rail launched and can be accommodated at most established launch ranges.


### Payload

The Terrier-Malemute vehicle is particularly suited for lower weight payloads; performance drops appreciably as payload weight increases. Bulbous diameter payloads can be accommodated on the

Terrier-Malemute; however, the high dynamic pressures encountered by this vehicle result in high aerodynamic heating rates and high vehicle structural loads. Thus, payload design characteristics must be carefully considered. This vehicle is generally used for relatively lightweight plasma physics payloads.

**Performance Graph**

Performance parameters of the Terrier-Malemute vehicle are shown in Figure F.2-2. The payload configuration for reference data is a 16-inch diameter with a 3:1 ogive nose shape.

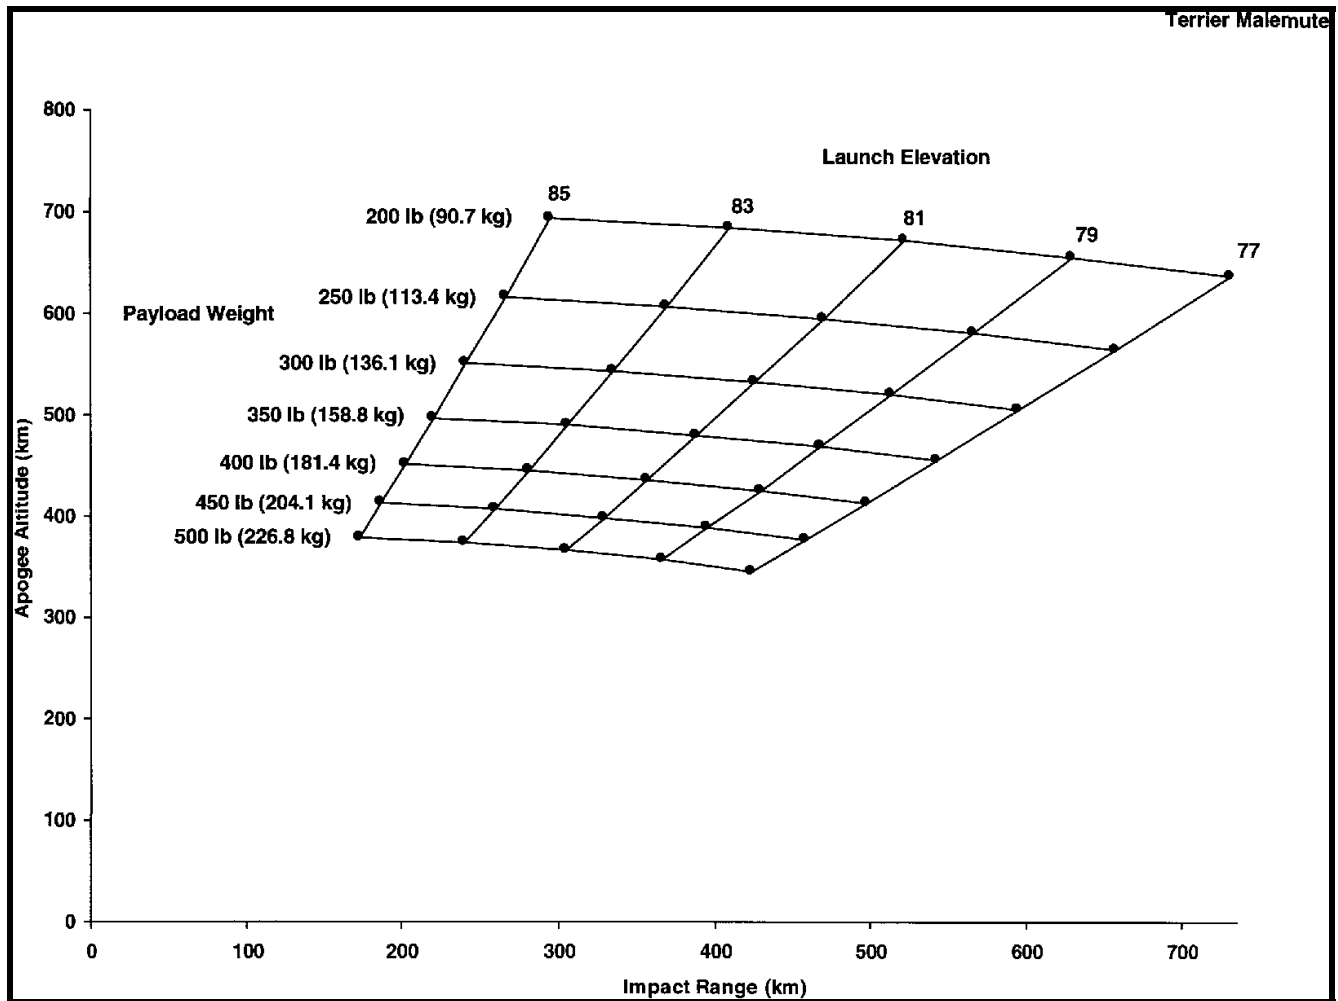

**Figure F.2-2: Terrier-Malemute Launch Vehicle Performance**

### F.3 Improved Orion Launch Vehicle (30.XXX)

#### General

The Improved Orion is a single stage, unguided, fin stabilized rocket system which uses a surplus Army rocket motor having a dual phase propellant. Three fins on the aft end of the motor provide forces for rolling up the vehicle in flight for stability. Figure F.3-1 shows the Improved Orion vehicle.



**Figure F.3-1. Improved Orion Launch Vehicle**  
*(Photo by Scott Neville)*

#### Vehicle Performance

The Improved Orion is 14 inches in diameter and 110 inches long. The Improved Orion fins are nominally canted to provide a four revolutions per second spin rate at burnout. The rocket carries an 85 pound payload to 88 kilometers and a 150 pound payload to 71 kilometers when launched from sea level at an 85 degree launch angle.

#### Payloads


The standard payload for the Improved Orion has a principal diameter of 14 inches and utilizes many nose cone shapes. The normal payload length varies from 72 to 100 inches although this is not the

maximum envelope. Payload diameters as small as 4.5 inches are flown on the Orion and performance characteristics are most favorable for 85 to 150 pound payloads.

Standard hardware includes a separable clamshell nose cone and an Orion standard ignition system. Separation systems can be provided to separate the payload from the motor during ascent.

**Performance Graph**

The Improved Orion launch vehicle apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figure F.3-2.

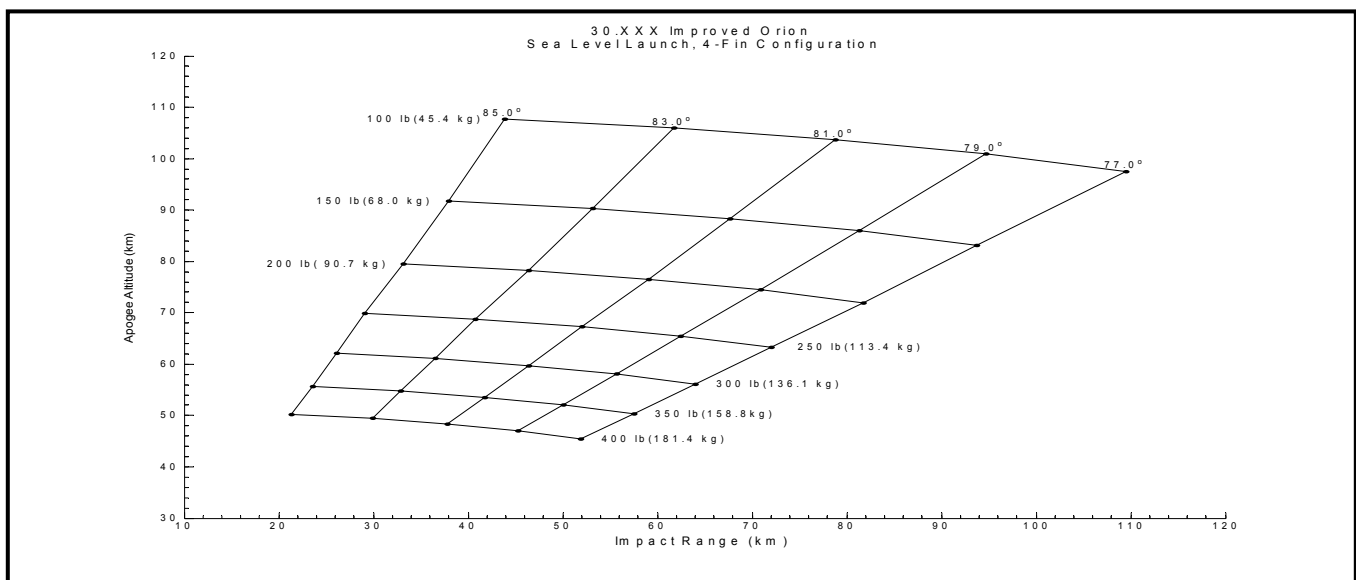

**Figure F.3-2: Improved Orion Launch Vehicle Performance**

## F.4 Black Brant X Launch Vehicle (35.XXX)

### General

The Black Brant X rocket system is a three-stage system; unique because the third stage motor is ignited once the vehicle system reaches exoatmospheric conditions. The motors and the finless third stage is the Nihka rocket motor, Figure F.4-1 shows the Black Brant X vehicle.



**Figure F.4-1: Black Brant X Launch Vehicle**

### Vehicle Performance

The first stage booster consists of a Terrier MK 12 Mod 1 rocket motor with four 340 square inch fin panels arranged in a cruciform configuration. The Terrier booster has an overall diameter of 18 inches.

The 26 KS 20,000 Black Brant V rocket motor produces an average thrust level of 17,025 pounds with an action time of 26.9 seconds. The primary diameter of the Black Brant V is 17.26 inches and it is 210 inches long. Loaded weight of the motor including hardware is 2,789 pounds which includes 2,198 pounds of propellant. The Nihka rocket motor was developed specifically for the Black Brant X rocket system by Bristol Aerospace. The average thrust is 12,000 lbs. with a total impulse of 193,500 lb-sec. The primary diameter is 17.26 inches and the length is 76 inches. The Nihka motor weighs 894 lbs. including 756 lbs. of propellant.


### Payload

The standard payload configuration for the Black Brant X vehicle is 17.26 inches in diameter with a 3:1 ogive nose shape. Payload length and weight limits for the Black Brant X are not defined as they are for the Black Brant V and specific limitations for this system are determined as the situation warrants.

Standard hardware systems that are available for Black Brant V motors include aft recovery systems, payload separation systems (including High Velocity Separation System) and despin systems. These units are modular "stackable" so that a great deal of flexibility exists in meeting experiment requirements.

**Performance Graph**

The Black Brant X launch vehicle configuration and apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figure F.4-2.

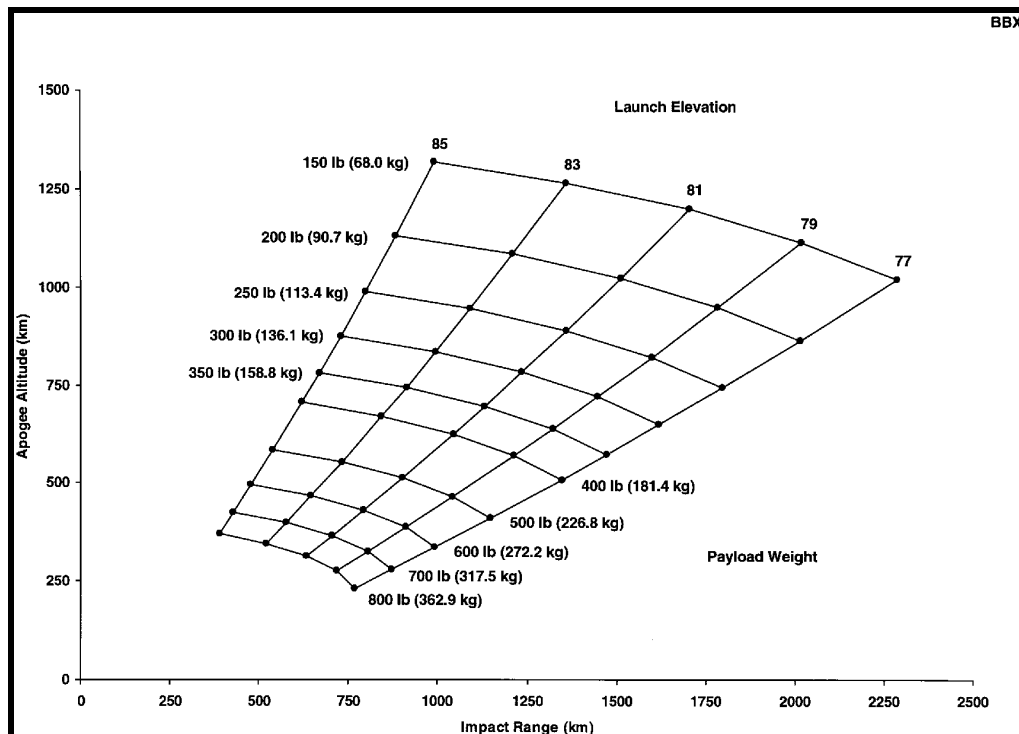


**Figure F.4-2: Black Brant X Launch Vehicle Performance**



## F.5 Terrier-Black Brant IX Launch Vehicle (36.XXX)

### General

The Black Brant IX vehicle system (Figure G.5-1) is the fourth in the group of rocket systems using the 17.26 inch diameter Black Brant V rocket motor. This vehicle fulfills a weight to altitude requirement for the scientific community which is not met by other NASA vehicle systems.

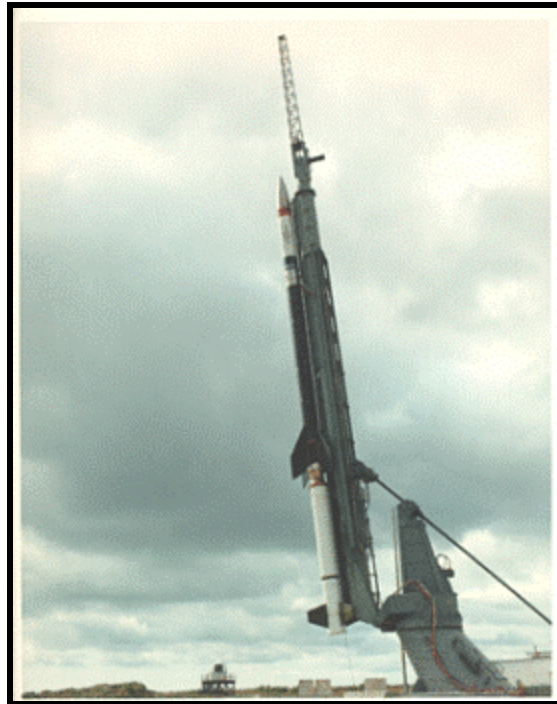

**Figure F.5-1: Black Brant IX Launch Vehicle**

There are three versions of the BBIX vehicle used. Each vehicle configuration is flight qualified and is available for mission selection:

- BBIX Mod 0: Terrier MK 12 – BBVC
- BBIX Mod 1: Terrier Mk 70 – BBVC
- BBIX Mod 2: Terrier Mk 70 – BBVC (with extended cone).

### Vehicle Performance

The first stage booster consists of either a Terrier MK 12 Mod 1 rocket motor or a Terrier MK 70 rocket motor, both of which are equipped with four 340 square inch fin panels arranged in a cruciform configuration. The Terrier booster has a diameter of 18 inches.

The 26 KS 20,000 Black Brant VC rocket motor produces an average thrust level of 17,005 pounds and an action time of 26.9 seconds. The primary diameter of the Black Brant VC is 17.26 inches and it is

210 inches long. Loaded weight of the motor including hardware is 2,789 pounds which includes 2,198 pounds of propellant.

**Payload**


The standard payload configuration for the Black Brant IX vehicle is 17.26 inches in diameter with a 3:1 ogive nose shape. Payload length and weight limits are not defined as they are for the Black Brant V and specific limitations will be determined as the situation warrants. The burnout roll rate for the second stage Black Brant is three to four cycles per second. The SPARCS can be flown on this vehicle. See Section 5 for additional information regarding SPARCS.

Standard hardware systems that are available for Black Brant V motors include aft recovery systems for 750 lb., 1000 lb. or 1250 lb. recovered weights, Ogive Recovery System Assembly (ORSA) for the same weight ranges, payload separation systems (including High Velocity Separation System) and despinn systems. These units are modular "stackable" such that a great deal of flexibility exists in meeting experiment requirements.


**Performance Graph**

Performance Graphs showing the launch vehicle apogee altitude and impact range at various launch elevation angles and payload weights for the BB IX Mod 0, BBIX Mod 1, and BBIX Mod 2 follow.

**MOD 0**

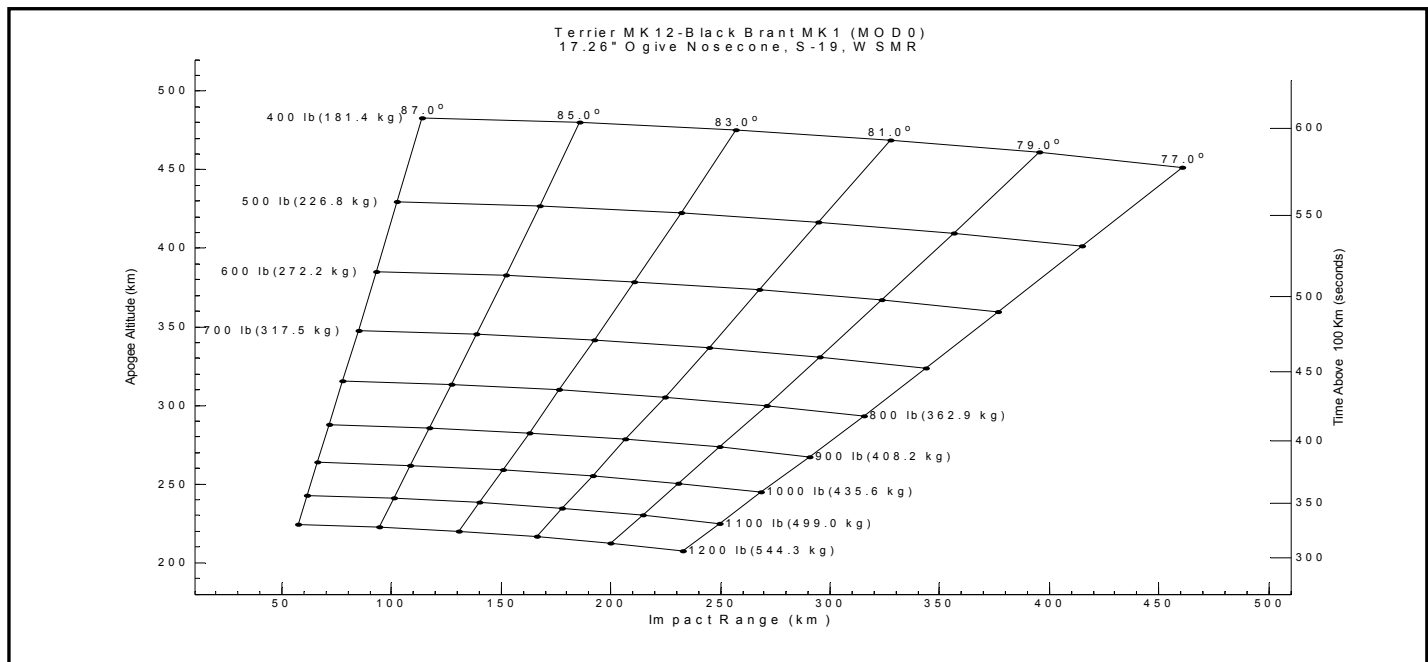


**Figure F.5-2: Terrier MK 12 Black Brant MK 1 (WSMR)**

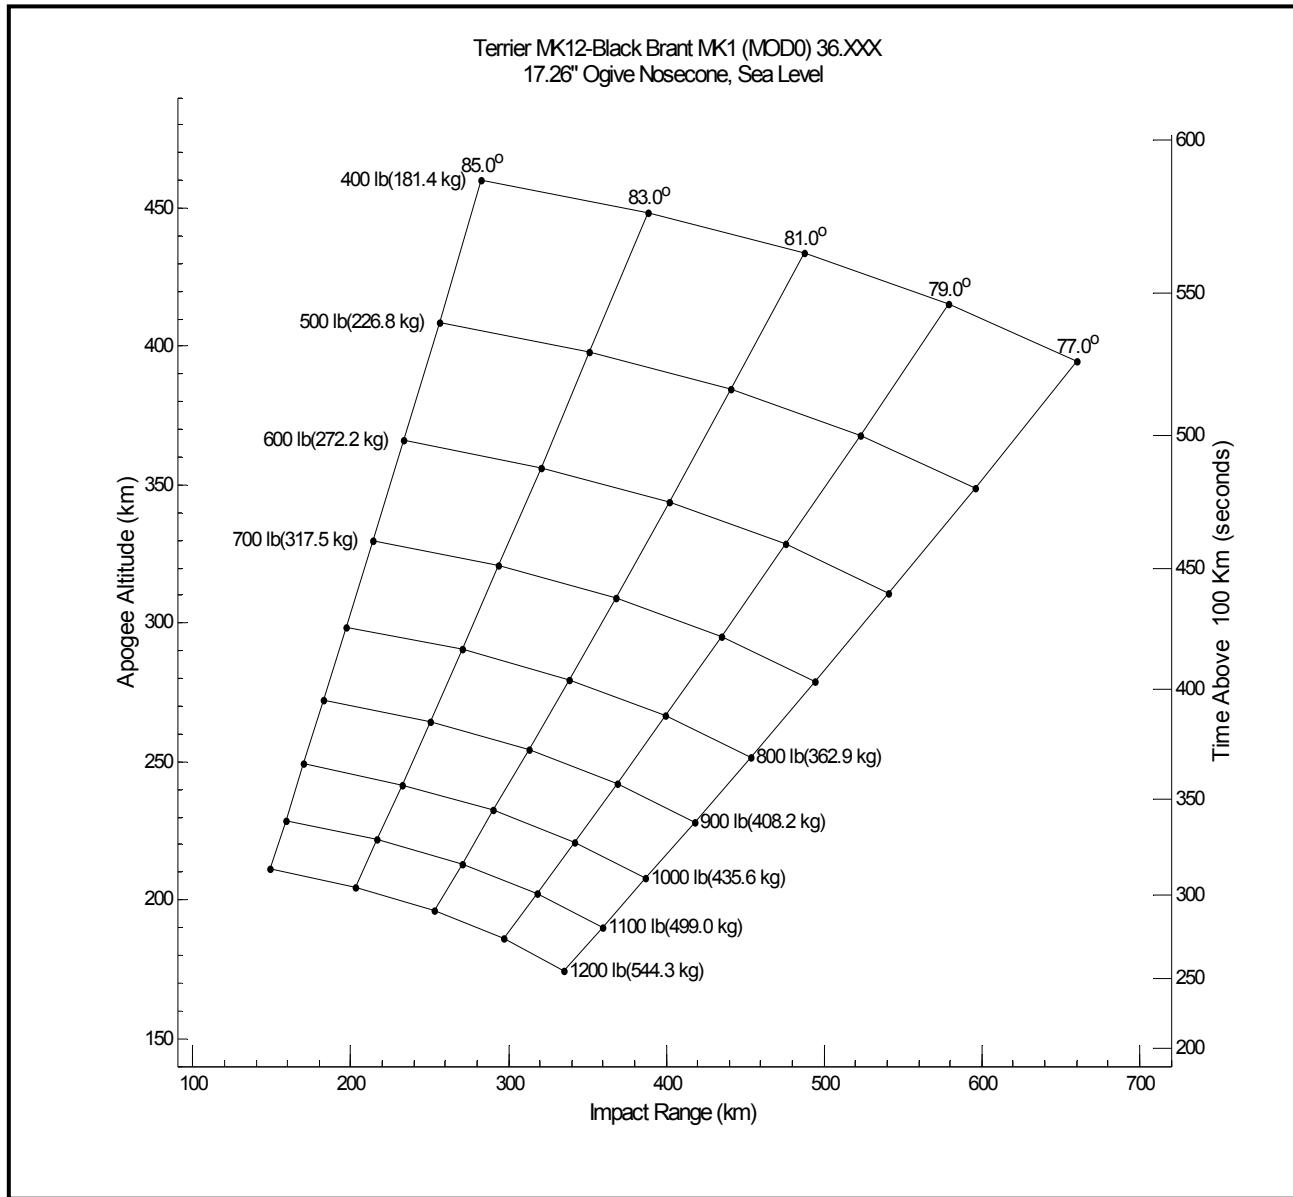


**Figure F.5-3: Terrier MK12-Black Brant MK 1 (Sea Level)**

**MOD 1**

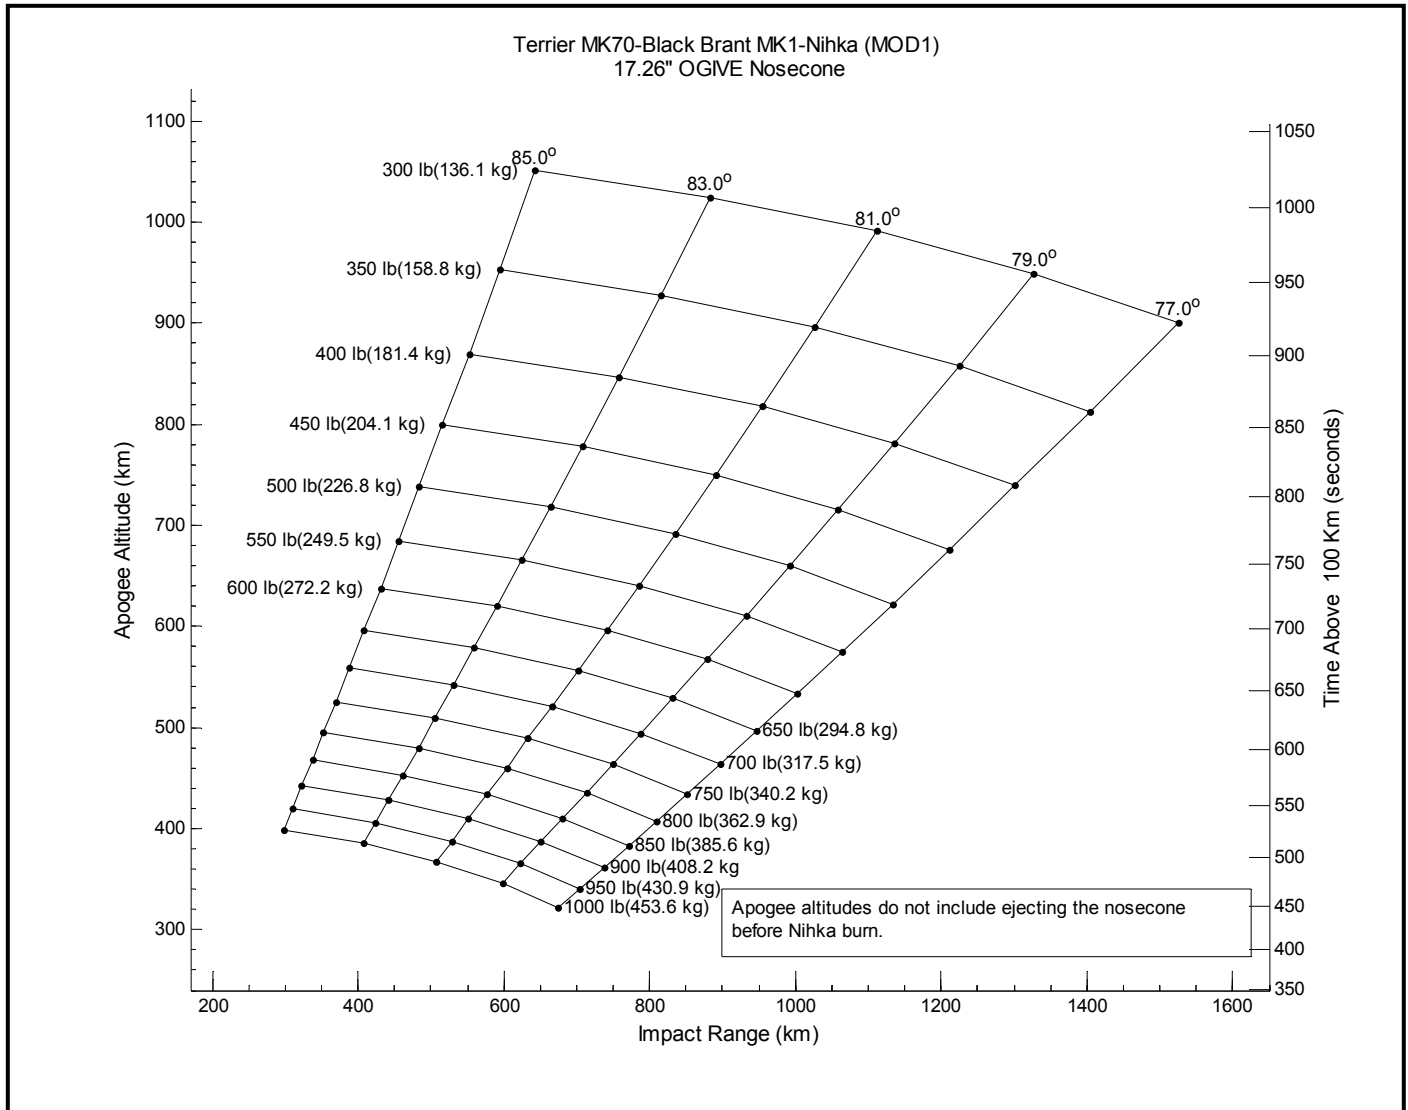


**Figure F.5-4: Terrier MK70-Black Brant MK 1-Nihka**

**MOD 2**

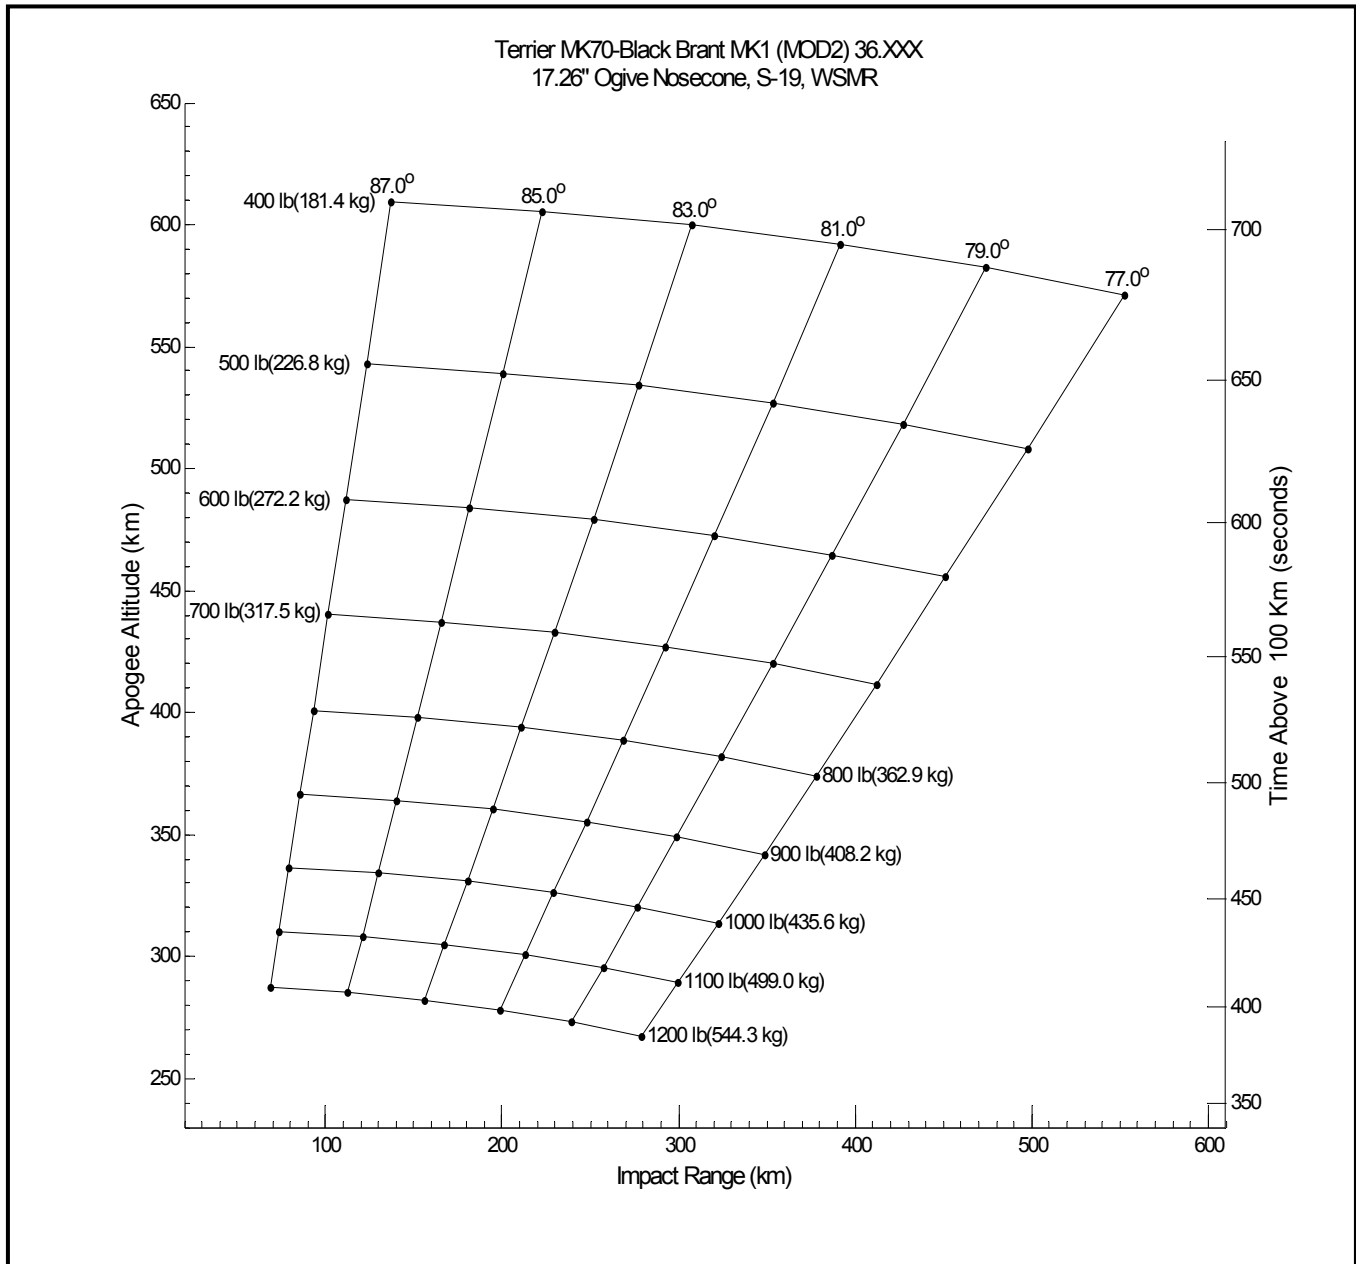

**Figure F5-5: Terrier MK70 –Black Brant MK 1 (WSMR)**

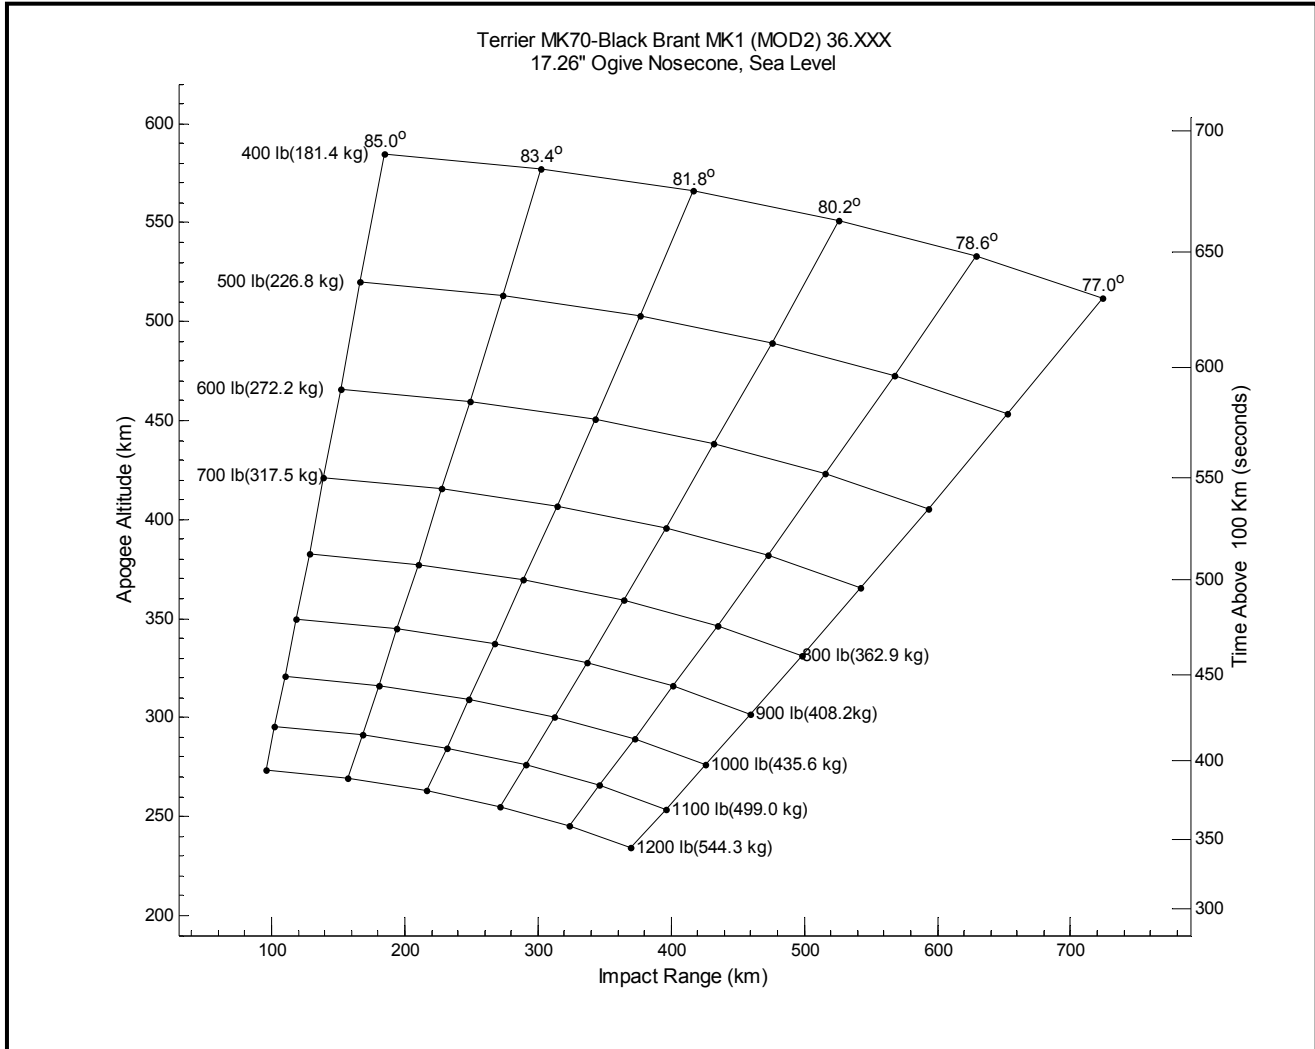

**Figure F.5-6: Terrier MK70-Black Brant MK1 (Sea Level)**

## F.6 Black Brant XI Launch Vehicle (39.XXX)

### General

The Black Brant XI rocket system is a three stage system used primarily to carry heavy payloads to high altitudes. Its development is a spin-off of the Black Brant XII development. The first and second stages are the Mk 11 Mod 5 Talos rocket motor and the Taurus motor. The third stage is a modified Black Brant VC motor. The Black Brant nozzle is extended for exoatmospheric use and the tailcan has been changed to enclose the nozzle. The aft end of the tailcan has a restraining device to keep the Taurus and Black Brant connected during second stage coasting. This motor configuration makes up the first three stages of the Black Brant XII.



**Figure F.6-1: Black Brant XI Launch Vehicle**

### Vehicle Performance

The Talos motor is 132 inches long with a diameter of 31 inches. It is fitted with a conical adapter for mating to the second stage. Differential drag forces cause separation. Four fins are arranged at the aft end in a cruciform configuration and drive the vehicle to approximately one revolution per second burnout roll rate.

The Taurus motor is 165 inches long with a principal diameter of 22.75 inches. The motor has the interstage adapter bolted to the forward end, which is then clamped to the aft end of the Black Brant motor. Each Taurus fin is 4.8 square feet. Normally, the fins are canted to provide two revolutions per second spin rate at

Taurus burnout. The weight of the booster system (with hardware) is 3005 pounds, including 1678 pounds of propellant.

The 26 KS 20,000 Black Brant V rocket motor has been modified for use as the third stage of the Black Brant XII. The nozzle cone has been extended as has the tailcan, and the diameter at the aft end of the conical extension is 22 75 inches. The motor case wall is thicker which permits use with significantly higher thrust lower stages. The standard Black Brant V fin panels are used even though the tail assembly is different. The modified Black Brant V rocket motor produces an average thrust of 17,025 pounds with an action time of 26 9 seconds. The primary diameter of the Black Brant V is 17.26 inches and it is 223 inches long. Loaded weight of the motor is 2,847 pounds which includes 2,198 pounds of propellant.

### **Payloads**


The standard payload configuration for the Black Brant XI vehicle is 17.26 inches in diameter with a 3:1 ogive nose shape. Payload length and weight limits for the Black Brant XI are not defined as they are for the Black Brant V and specific limitations for this system will be determined as the situation warrants. For payload weights of 700 pounds, apogee altitudes of 500 km can be expected. A payload of 1200 pounds will reach 350 km. Both values use a launcher elevation angle of 85 degrees from a sea level launch location.

Standard hardware systems that are available for Black Brant V motors include aft recovery systems for 750 lb. or 1000 lb. recovered weights, Ogive Recovery System Assembly (ORSA) for the same weight ranges, payload separation systems including a High Velocity Separation System and despin systems. These units are "stackable" such that a great deal of flexibility exists in meeting experiment requirements.

### **Performance Graph**

The Black Brant XI launch vehicle configuration and apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figure F.6-2 on the following page.



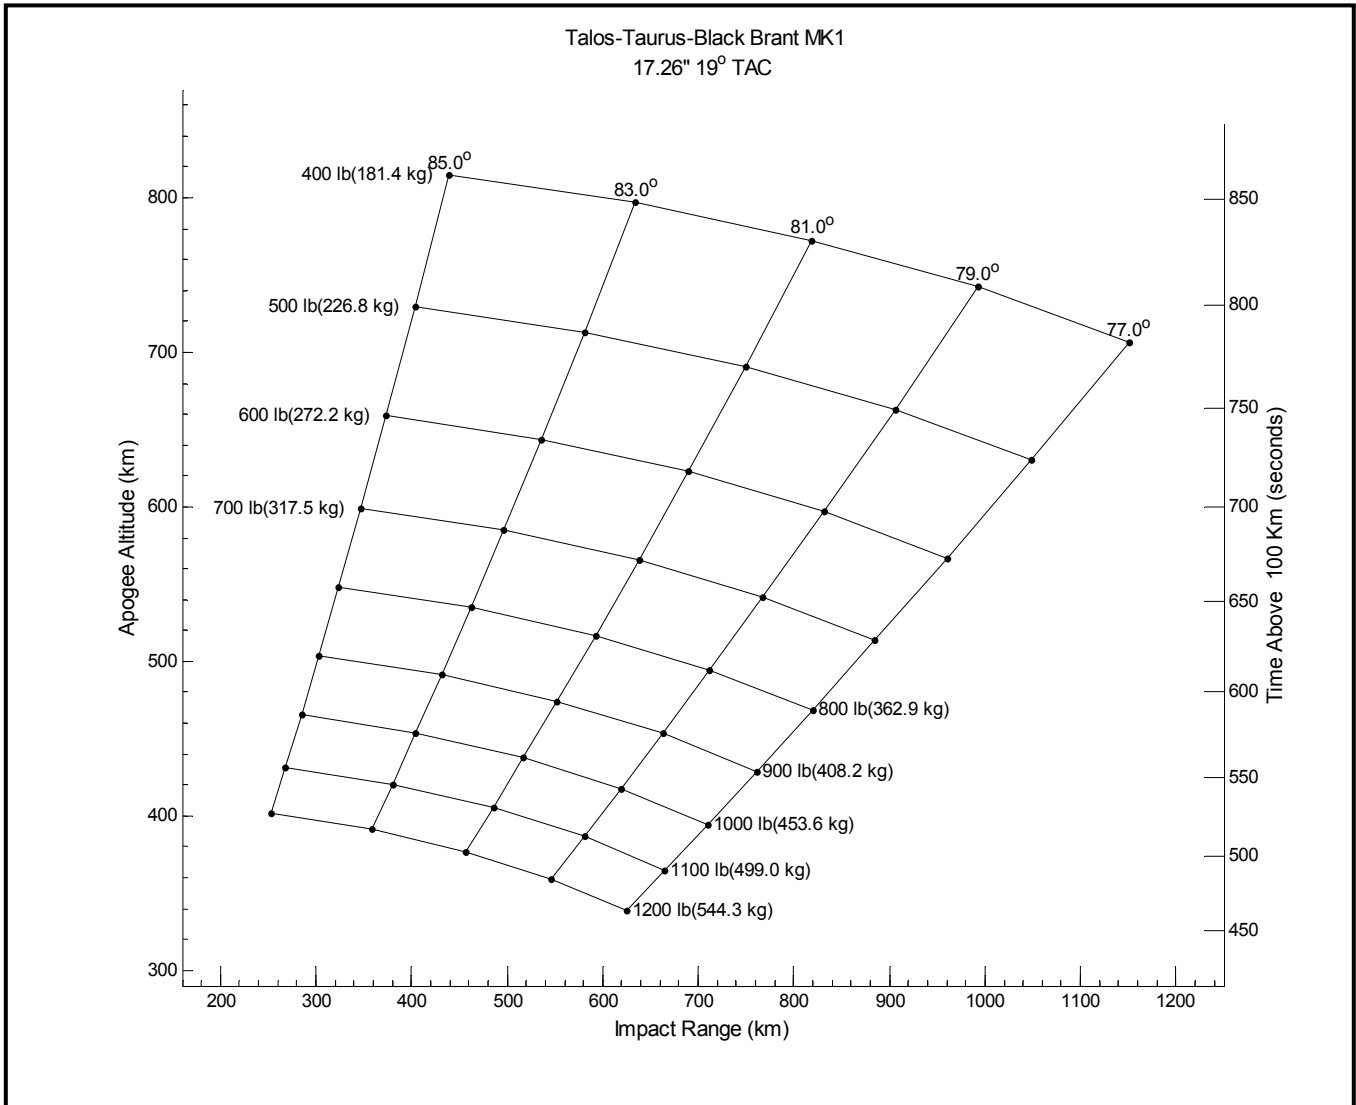

**Figure F6-2: Talos-Taurus-Black Brant MK 1 Predicted Vehicle Performance**

## F.7 Black Brant XII Launch Vehicle (40.XXX)

### General

The Black Brant XII rocket system (Figure F.7-1) is a four stage system used primarily to carry a variety of payloads to high altitudes. Its development is a spin-off of the Black Brant X development.



**Figure F.7-1: Black Brant XII Launch Vehicle**

### Vehicle Performance

The first and second stage are the Mk 11 Mod 5 Talos rocket motor and the Taurus motor. The third stage is a modified Black Brant VC motor. The Black Brant nozzle is extended for exoatmospheric use and the tailcan has been changed to enclose the nozzle. The aft end of the tailcan has a restraining device to keep the Taurus and Black Brant connected while coasting. The Talos motor is 132 inches long with a diameter of 31.1 inches. It is fitted with a conical adapter for mating to the second stage and differential drag forces cause separation. Four fins are arranged at the aft end in a cruciform configuration and drive the roll rate to approximately one revolution per second at burnout. Each fin is 6.9 square feet in area .

The Taurus motor is 165 inches long with a principal diameter of 22.75 inches. The motor has the interstage adapter bolted to the forward end, which is then clamped to the aft end of the Black Brant motor. Each Taurus fin is 4.8 square feet in area. Normally, the fins are canted to provide two revolutions per second spin rate at Taurus burnout. The weight of the booster system (with hardware) is 3005 pounds, including 1678 pounds of propellant.

The 26 KS 20,000 Black Brant V rocket motor has been modified for use as the third stage of the Black Brant XII. The nozzle cone has been extended as has the tailcan, and the diameter at the aft end of the conical extension is 22 75 inches. The standard Black Brant V fin panels are used even though the tail assembly is different. The 26 KS 20,000 Black Brant V rocket motor produces an average thrust level of 15,596 pounds and an action time of 32.42 seconds. The primary diameter of the Black Brant V is 17.26 inches and it is 210 inches long. Loaded weight of the motor including hardware is 2,803 pounds which includes 2243 pounds of propellant.

The Nihka rocket motor, previously developed for the Black Brant X, is used on this vehicle system. The average thrust is 10,592 lb, with a total impulse of 188.434 lb-sec. The primary diameter is 17.26 inches and the length is 76 inches. The loaded motor weight of 898.5 lbs. which includes 694.7 lbs. of propellant

### **Payloads**


The standard payload configuration for the Black Brant XII vehicle is 17.26 inches in diameter with a 3:1 ogive nose shape. Payload length and weight limits for the Black Brant XII are not defined as they are for the Black Brant V and specific limitations for this system will be determined as the situation warrants. Because of relatively high dynamic pressures, bulbous (larger than 17.26 inches) diameter payloads are carefully considered before flight on the Black Brant XII. For payloads weighing as little as 300 pounds, 1500 km apogee altitudes can be reached. The 500 km altitude region is attainable with 1150 pound payloads from sea level, when the launcher elevation is 85 degrees.

Standard hardware systems that are available for Black Brant V motors include payload separation systems including a High Velocity Separation System and despin systems. These units are "stackable" such that a great deal of flexibility exists in meeting experiment requirements. It should be noted that

because of the extreme range at even moderately high launch elevation angles, recovery of the payload may not be possible.

**Performance Graph**

The Black Brant XII launch vehicle configuration and apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figure F.7-2.

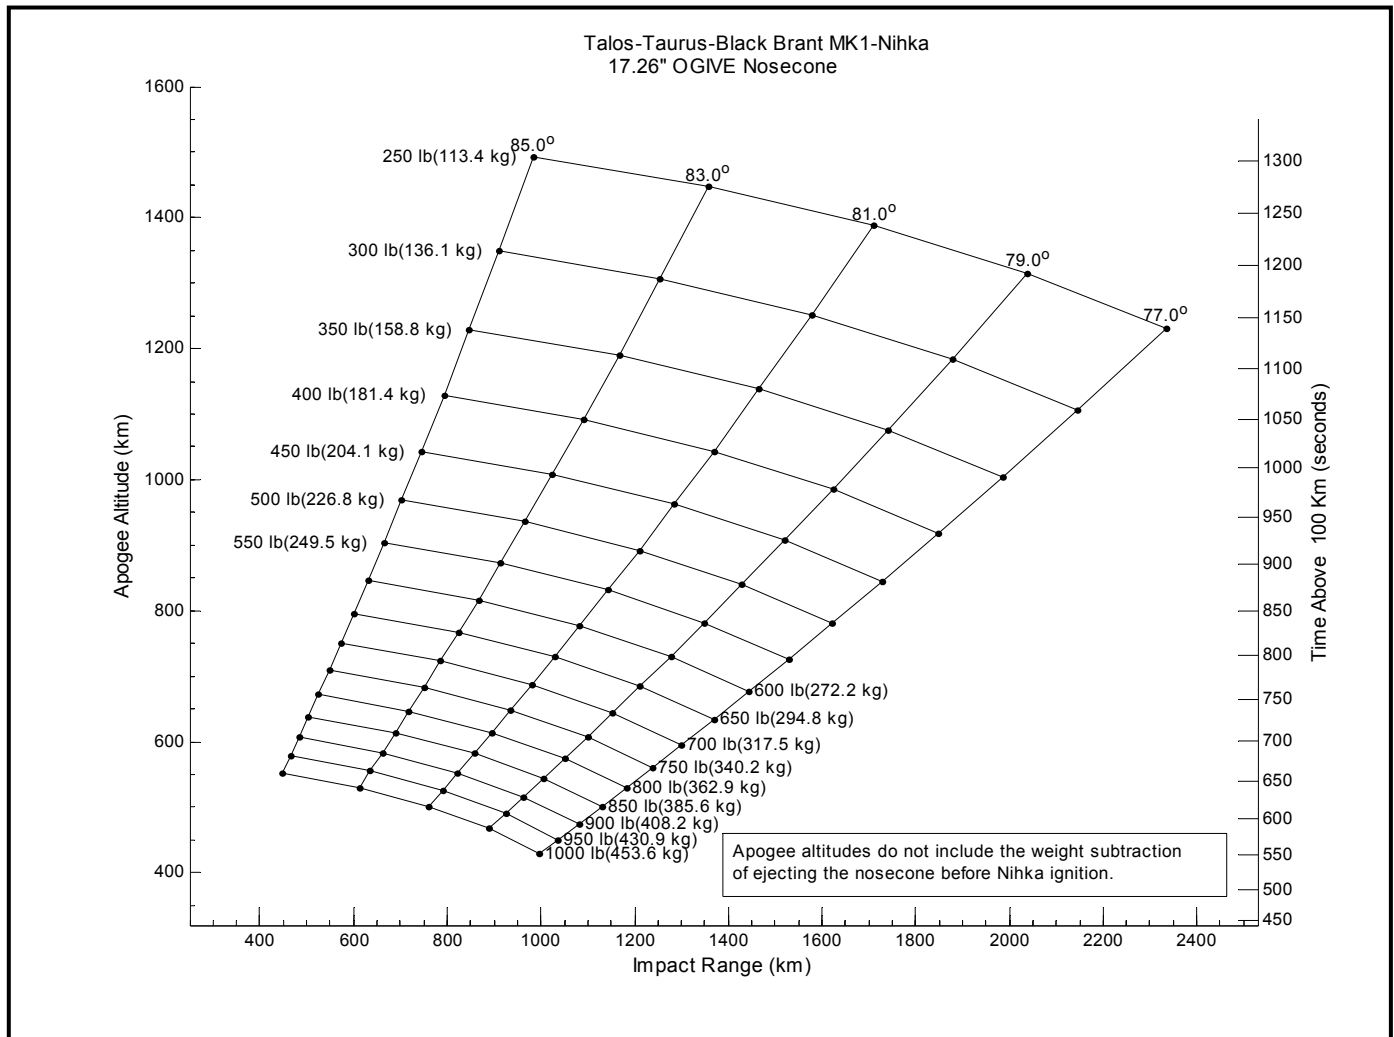

**Figure F.7-2: Talos-Taurus-Black Brant MK1-Nihka Predicted Vehicle Performance**

## F.8 Terrier-Improved Orion (41.XXX)

### General

The Terrier-Orion rocket system is a two stage spin stabilized rocket system which utilizes a Terrier MK 12 Mod 1 or Mk70 for the first stage and an Improved Orion motor for the second stage. The Terrier motor is 18 inches in diameter and is configured with 2.5 ft<sup>2</sup> or 4.8 ft<sup>2</sup> fin panels arranged in a cruciform configuration. The Orion motor is 14 inches in diameter and 110 inches long. The vehicle is typically configured with spin motors and the total weight of this configuration, excluding the payload, is approximately 2,900 pounds.



**Figure F.8-1: Terrier Improved Orion Launch Vehicle**

### Vehicle Performance

The Improved Orion motor has a bi-phase propellant system (boost-sustain) that results in thrust levels of approximately 19,000 pounds during the first four seconds of motor burn then trailing off to approximately 3,000 pounds until burnout around 25 seconds. The fins are generally configured to provide a burn out spin rate of four cycles per second. The Orion motor utilizes a clamp-released/load-bearing tail can to interface with the Terrier motor. This is a rail-launched configuration that can be supported at most fixed and mobile launch ranges.


**Payloads**

Payload configurations supported by this vehicle include 14 inch and bulbous 17.25 inch diameters. Payload weights ranging from 200 to 800 pounds can achieve altitudes of approximately 200 to 80 kilometers respectively.


Available support systems include the standard 14 inch Ignition Recovery Module Assembly (IRMA), ACS systems, and nose cones of various configurations. The complete cadre of 17.25 inch diameter support systems is available for use with the bulbous payloads. These include fixed and deployable nose cones; fine, course, rate control, and magnetic ACS systems; separation and despin systems; and forward and aft recovery systems.

**Performance Graph**

The Terrier-Improved Orion launch vehicle configuration and apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figures F.8-2 and F.8-3.

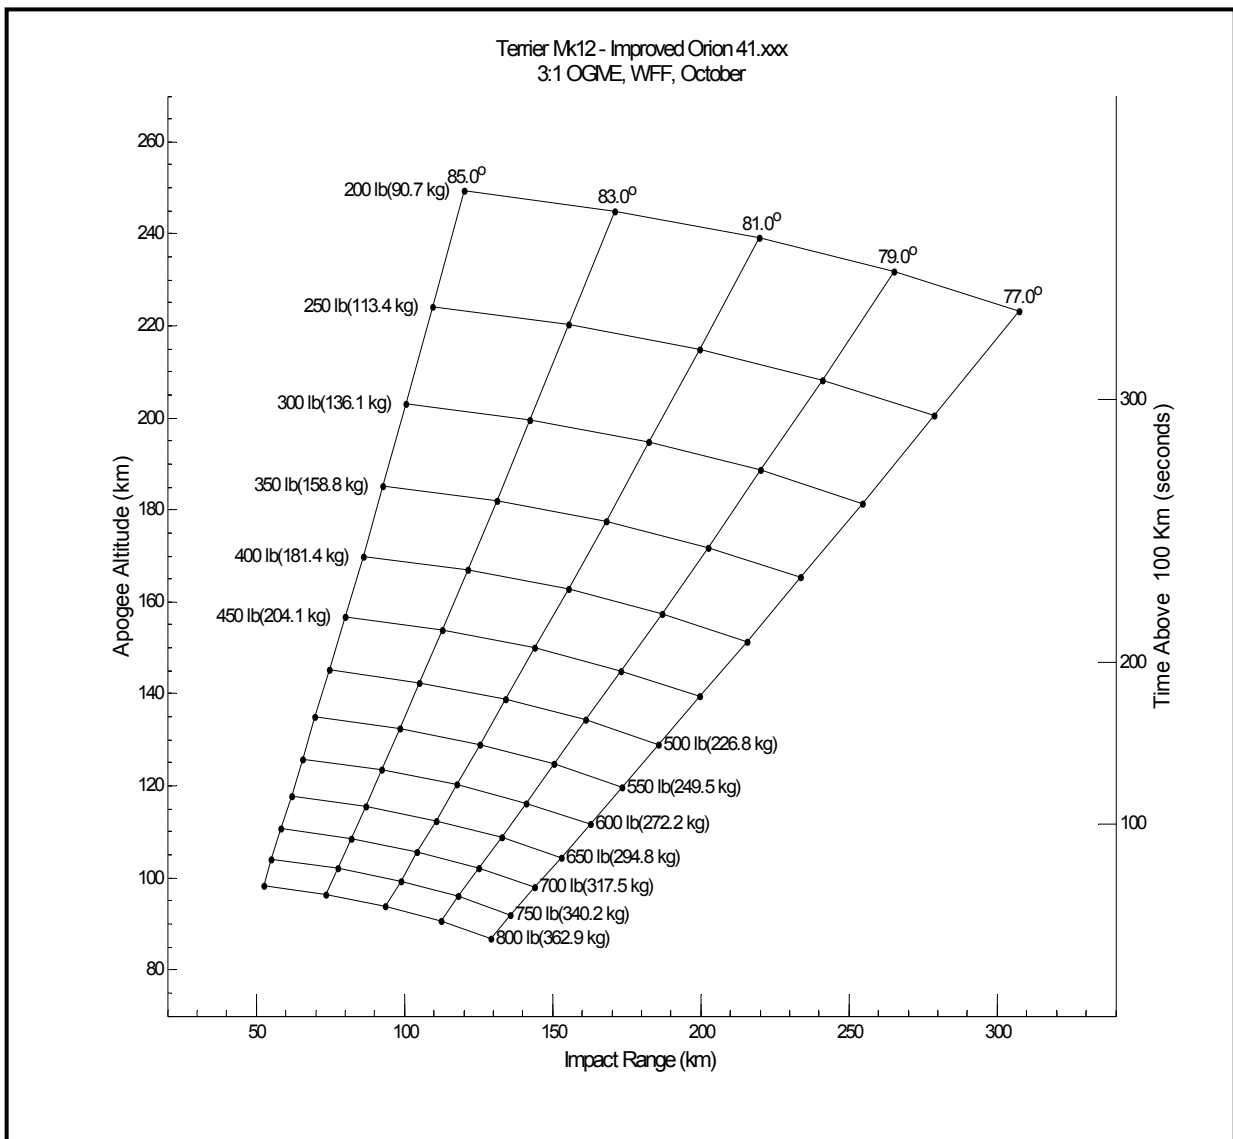

**Figure F.8-2: Terrier MK12-Improved Orion Predicted Vehicle Performance**

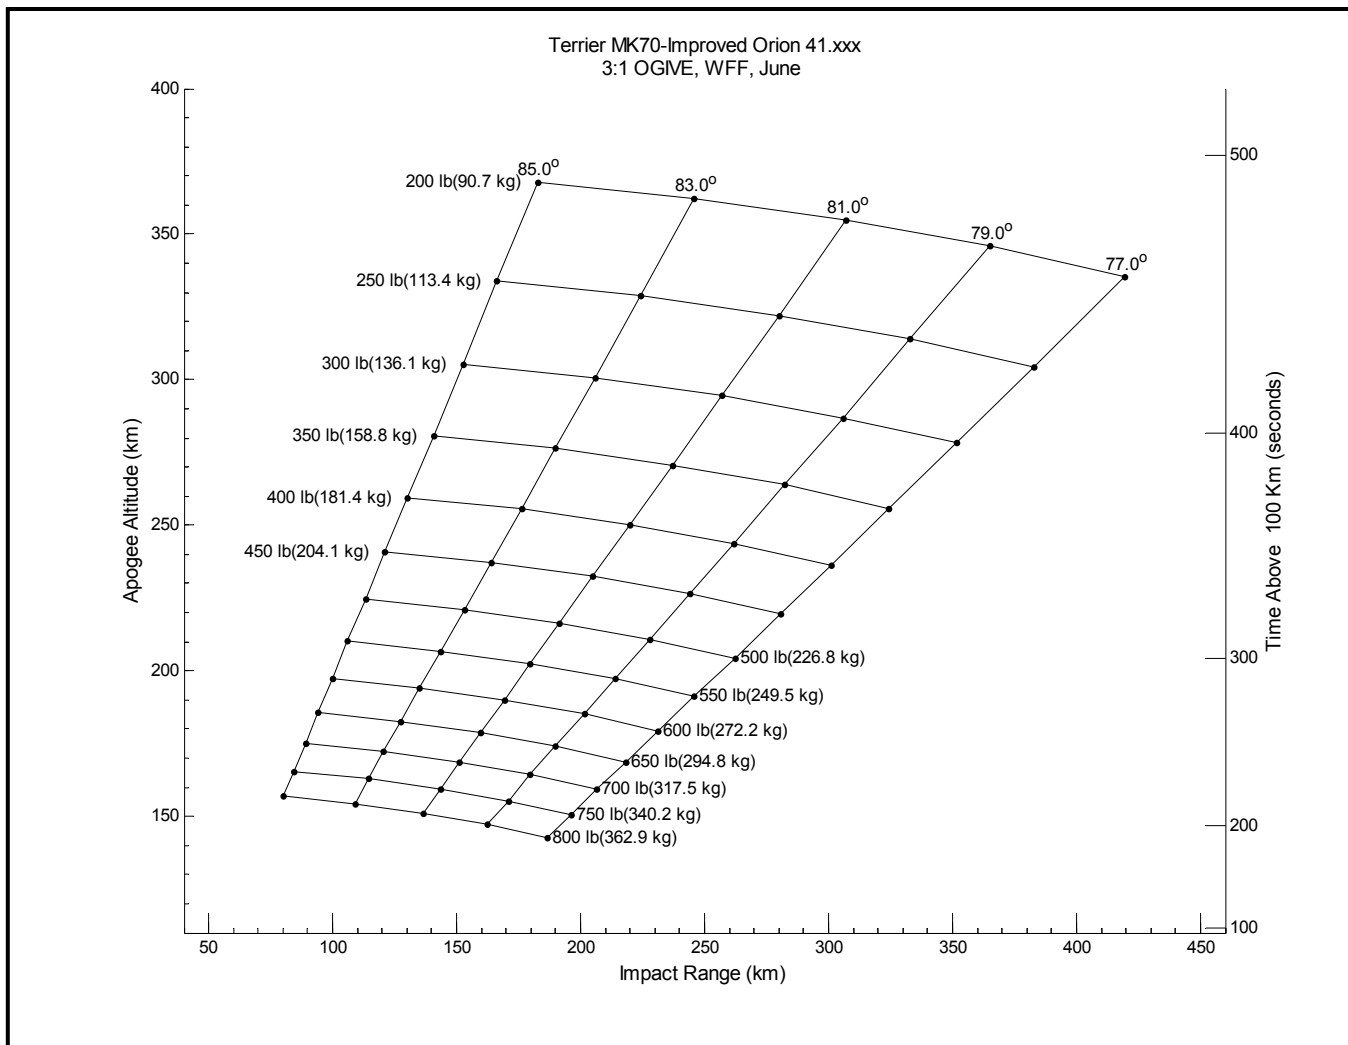

**Figure F.8-3: Terrier MK70-Improved Orion Predicted Vehicle Performance**

## F.9 Terrier Lynx (42.XXX)

### General

The Terrier Lynx is a two-stage, unguided, fin stabilized rocket system which utilizes a Terrier mk70 first stage booster and a Lynx rocket motor for the second stage propulsion. The Terrier mk70 motor has four equally spaced modified Ajax fins, and the Lynx motor has four modified Orion fins on the aft end arranged in a cruciform configuration to provide stability. Figure F.9-1 shows the Terrier Lynx vehicle.



**Figure F.9-1 Terrier Lynx Launch Vehicle**

### Vehicle Performance

The basic Terrier MK70 motor is 155 inches long with a principal diameter of 18 inches. There is a 3 inch interstage adapter which allows for drag separation at Terrier burnout. Typically, the Terrier booster will utilize two spin motors to reduce dispersion and also serve as drag plates. Each Terrier fin is 4.6 square feet in area. Normally, the fins are canted to provide two revolutions per second spin rate at Terrier burnout. The weight of the Booster system is 2,288 pounds.

The Lynx is 14 inches in diameter and 110 inches long. The Lynx fins are normally canted to provide for four revolutions per second spin rate at burnout.




**Payload**

The standard payload for the Terrier MK70-Lynx has a principal diameter of 14 inches and utilizes a 3:1 ogive nose cone, although an 11 deg total angle cone can also be flown. The envelope of payload lengths that can be flown has not been established yet, however, it is expected to be similar to the boosted Orion family. The rocket system will carry a 250 pound payload to 378 kilometers and a 500 pound payload to 254 kilometers when launched from sea level at an 85 degree launch angle.

Standard hardware includes a 3:1 ogive nose cone and a capacitive discharge ignition system. Separation systems can be provided to separate the payload from the motor during ascent.

**Performance Graph**

The Terrier mk70-Lynx launch vehicle configuration and apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figure F.9-2.

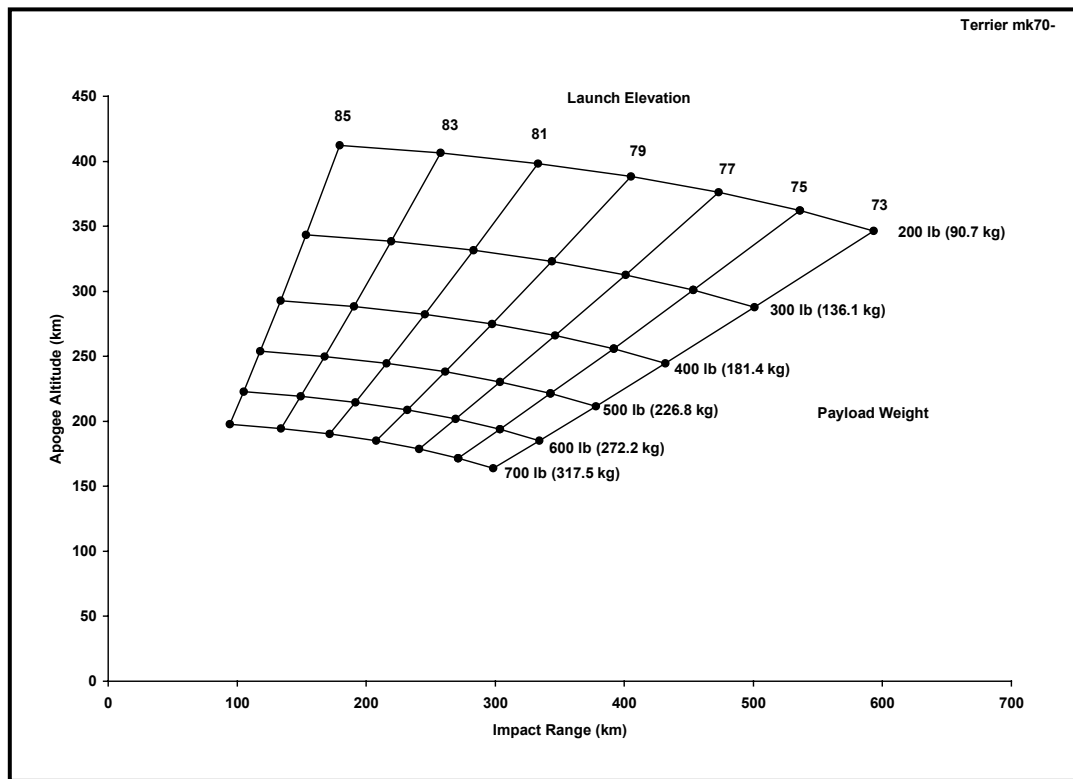

**Figure F.9-2 Terrier Lynx Performance Graph**

## F.10 Terrier Oriole (45.XXX)

### General

The Terrier Oriole is a two-stage, unguided, fin stabilized rocket system which utilizes a Terrier first stage booster and an Oriole rocket motor for the second stage propulsion. The Terrier motor has four equally spaced fins, and the Oriole motor has four fins on the aft end arranged in a cruciform configuration to provide stability.



**Figure F.10-1: Terrier Oriole**

### Vehicle Performance

The Terrier motor is 155 inches long with a principal diameter of 18 inches. There is a 14 inch interstage adapter which allows for drag separation after Terrier burnout. Typically, the Terrier booster will utilize two spin motors to reduce dispersion and also serve as drag plates. Each Terrier fin is 4.8 square feet in area. Normally, the fins are canted to provide two revolutions per second spin rate at Terrier burnout. The weight of the Booster system is 2,207 pounds.


The Oriole is 22 inches in diameter and 155 inches long. The Oriole fins are normally canted to provide for four revolutions per second spin rate at burnout.

**Payload**

The standard payload for the Terrier Oriole has a principal diameter of 22 inches and utilizes a 19° total angle nose cone, although an Ogive cone can also be flown. The envelope of payload lengths that can be flown has not been established yet. The rocket system will carry a 800 pound payload to 340 kilometers and a 1500 pound payload to 184 kilometers when launched from sea level at an 85 degree launch angle. Standard hardware includes a nose cone and a capacitive discharge ignition system. Separation systems can be provided to separate the payload from the motor during ascent.

**Performance:**

The Terrier Oriole launch vehicle configuration and apogee altitude and impact range at various launch elevation angles and payload weights are presented in Figure F10-2.

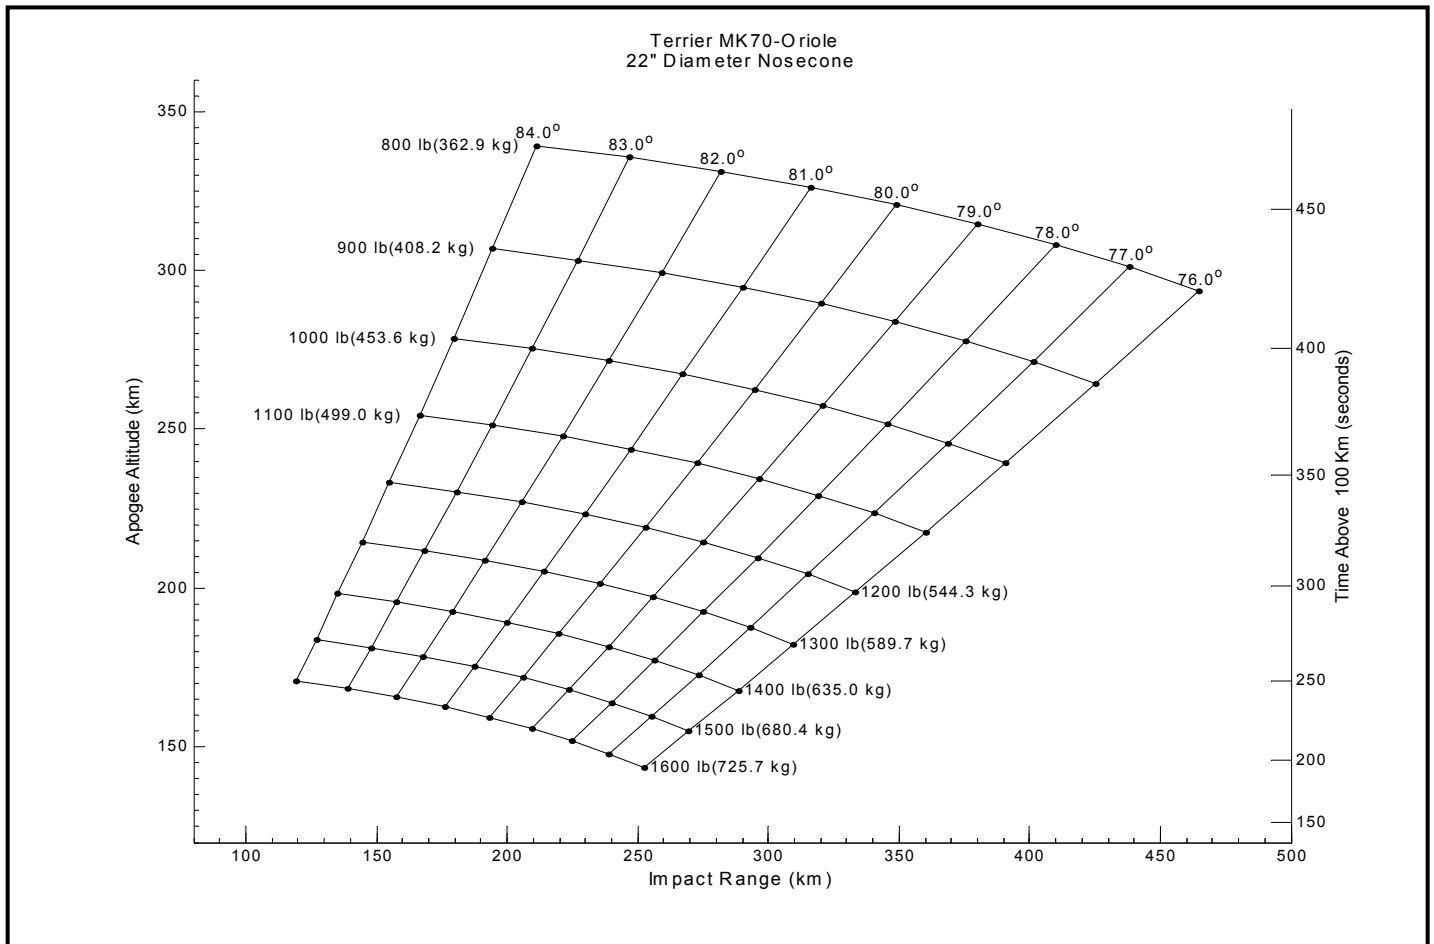

**Figure F.10-2: Terrier Oriole Motor Vehicle Predicted Performance**

## Appendix G: PCM/FM and FM/FM Telemetry Systems

### G.1 Vector MMP-900 PCM System

The MMP-900 PCM system is a micro-miniature system with considerable flexibility. The data input forms accepted by the MMP-900 are analog, serial digital parallel digital, pulse count, and pulse time event data. The output format of the MMP-900 system has programmable flexibility. The matrix can be up to 200 x 32 words or reduced to 2 x 1. The user program, stored in a single EPROM, determines the output format. The selectable system parameters are bit rate, word length, parity, output code, and sample duration Refer to Table G.1-1 for individual module characteristics.

**Table G.1-1 Individual PCM Module Characteristics, MMP-900 PCM System**

<b>Module</b>	<b>Description</b>	<b>Data Type</b>	<b>Number of Channels Possible</b>
PX-984	Power Supply	N/A	N/A
TM-915D	Timer	N/A	N/A
PR-914	Processor	N/A	N/A
AD-906	Sample and Hold and Analog to Digital Converter	Analog	N/A
MP-901L	Analog Multiplexer	Analog	256
SD-924	Serial Digital Multiplexer	Serial Digital	32
PD-929	Parallel Digital Multiplexer	Parallel Digital	48
CM-922P	Counter Accumulator	Pulse Count	38
TA-923	Time Event Monitor with Alternating Registers	Pulse Time-Event	2
TD-925	Time Event Monitor with Timing Buffers	Pulse Time-Event	4
FL-919A	Adjustable Quad Pre-Modulation Filters	N/A	N/A

NASA reference publication 1365, June 1995 entitled *Pulse Code Modulation (PCM) Encoder Handbook for Aydin Vector MMP 900 Series System*, fully describes the MMP-900 system. This publication is available from the Mission Manager.

## G.2 WFF93 Encoder System

This system is the newest available PCM encoder hardware used in support of the NASA Sounding Rocket Program. The WFF93 PCM encoder is a general purpose, versatile, re-configurable high rate PCM telemetry system for use where system requirements are subject to change. The format structure is configured by a software program designed for the PC environment. The hardware is configured as a stack up system with various data modules, which can be added as required. An EEPROM is used as the non-volatile program storage element, permitting the system to be reprogrammed to meet changing mission requirements without disassembly of the hardware. FCT logic and low power programmable logic devices minimize power consumption. Digital inputs and outputs are FCT/HC or RS422 compatible. Refer to Table H.2-1 for individual module characteristics.

**Table G.2-1: Individual PCM Module Characteristics - WFF93 PCM System**

Module	Description	Data Type	Number of Channels Possible (See *Note)
Power Supply	+28V input to +/-12 & +5 volt output power supply	N/A	N/A
Analog	Analog 0 to 5 volt input range, 10 bits/word maximum resolution, 32 channels per deck, 1 A/D converter per deck	Analog, single ended	Addressing limit of 992 channels
Analog	Analog 0 to 5 volt input range, 12 bits/word maximum resolution with readout capability in 2 words for systems with less than 8 bits/word, 8 channels per deck, 8 A/D converters per deck	Analog, single ended with – Signal Reference	Addressing limit of 248 channels
Analog	Remote Differential Analog Deck with 0 to 5 or +/-15 volt input range, 16 bits/word maximum resolution with readout capability in 2 words for systems less than 16 bits/word, 4 channels per deck, 4 A/D converters per deck. System intended to be remotely located from main WFF93 stack and requires dedicated power supply. Data transmitted serial digitally and each analog channel requires dedicated serial channel in main PCM stack.	Analog, differential input	Addressing limit of 124 channels
Control Deck	System clock, timing, formatting, output code generation, and format programming control module	N/A	N/A
Serial	Serial digital single ended or differential input operation, 8 to 16 bits/word, serial word enable, inverted load, gated bit clock timing signal available for each input	Serial Digital	Addressing limit of 124
Parallel	Parallel digital single ended input, 8 to 16 bits/word, parallel word enable timing signal available for each input	Parallel digital	Addressing limit of 62 channels
Asynchronous	Asynchronous RS232 or 422 inputs, 300 to 156K baud rates	Asynchronous	Addressing limit of 124 channels
Counter	Event counter single ended or differential input, 8 to 18 bits/word. Differential input count rates >10 MHz	Event counter	Addressing limit of 248 channels
Command	Accepts uplink command video and demodulates and	Uplink	N/A

	synchronizes data. Outputs two independent asynchronous channels at rates from 1200 to 19.2K baud, plus parallel command data to uplink command decoder hardware	command FSK video	
Time Event	Time event with single ended or differential inputs, buffered clock-minor frame-major frame-word clock outputs	Time Event	Addressing limit of 62 simple time event and 62 alternating register time event channels
Pre Modulation Filter	Selectable 1 of 8 premodulation filters with output amplitude adjustability	N/A	N/A
TV Video Digitizer and Compressor	These modules digitize standard NTSC, RS-170 or SVHS TV video, compress the digitized data and are converted to MPEG-2 format, and multiplexed with payload PCM data to provide a single composite PCM output signal.	TV Video	Maximum unknown at this time.
Clock Driver	Provides 16 programmable, buffered, RS422-compatible differential outputs for 2x Bit Clock, 1x Bit Clock, Word Clock, Frame Strobe, Major Frame Strobe and PCM Code. This module has both DS26C31 standard differential & DS90C31 low voltage differential quad drivers and either can be selected as required.	Programmable Clock Driver Outputs	N/A
IMU	Inertial Measurement Unit that is compatible with either the Litton LN-200 or the Honeywell HG-1700 IMU's. The IMU deck accepts SDLC protocol 1-MHz RS422 differential data as well as provides a 1-MHz RS422 differential clock to the IMU for synchronous data transfer.	Honeywell or Litton IMU/SDLC	N/A
<p>Note 1: The maximum values are based on theoretical limits. (i.e. number of channels per module times 31, which is the module addressing limit) No one has ever attempted to fly the maximum. Current limitations in the power supply module may actually determine the maximum number of data modules that can be incorporated in a system.</p>			
<p>Note 2: The number of words per major frame is limited to 8192 words maximum. A document entitled Pulse Code Modulation Encoder handbook for Physical Science laboratory/NMSU Model WFF93 System fully describes the WFF93 PCM System.</p>			

### G.3 Telemetry: The GLN-MAC Inertial Attitude Sensor

**Table G.3-1: GLN-MAC Inertial Attitude Sensor Specifications/Characteristics**

<p style="text-align: center;"><b>Performance Capabilities</b></p> <p>Spin Isolation..... 15 Hz max (9 Hz at 150 gs)</p> <p style="text-align: center;"><b>LN-200 Gyro Performance</b></p> <p>Bias Repeatability..... 1 degree/hour                  Random Walk..... 0.05 deg/rt-hour                  Scale Factor Stability..... 100 ppm (1<math>\sigma</math>)                  Bandwidth..... &gt;500 Hz                  Operating Range..... <math>\pm 1000</math> deg/sec                  Quantization..... 1.9 <math>\mu</math> radian</p> <p style="text-align: center;"><b>LN-200 Accelerometer Performance</b></p> <p>Bias repeatability.....200 <math>\mu</math>g (1<math>\sigma</math>)                  Scale Factor Stability.....300 ppm(1<math>\sigma</math>)                  Noise.....500 <math>\mu</math>g/rt-Hz                  Bandwidth..... 100 Hz                  Operating Range..... <math>\pm 40</math> g</p> <p style="text-align: center;"><b>Data Output Rate</b></p> <p>Typical.....400 Hz                  Activation Time..... 0.8 seconds                  Full Accuracy .....5 seconds</p>	<p style="text-align: center;"><b>Nominal Dimensions</b></p> <p>Volume..... 100 in<sup>3</sup> (1600.4 cm<sup>3</sup>)                  Height..... 8.3 in (21.0 cm)                  Diameter ..... 4.13 in (10.5 cm)                  Mounting Flange..... 5.38 in (13.7 cm)                  Mass..... 5.7 lbm (2.59 Kg)</p> <p style="text-align: center;"><b>Electrical Characteristics</b></p> <p>Operating Voltage..... +28 V <math>\pm</math> 6 V                  Current (caged)..... 750 mA                  Current (0-12rps)..... 0.75–2.1 A</p> <p style="text-align: center;"><b>Analog Outputs (0-5V)</b></p> <p>Gyro X, Y, Z..... <math>\pm 1000^\circ</math>/sec                  Accelerometer X, Y, Z..... <math>\pm 40</math> g                  +28V Monitor..... 0–33 V                  +5V Monitor..... 0–6 V                  –5V Monitor..... 0–6 V                  +15V Monitor..... 0–16 V                  –15V Monitor..... 0–16 V                  Temperature..... 0–187°C</p>
---	--

**Appendix H**  
**Comparison and Performance**  
**of**  
**Various Battery Systems**



**Table H-1**  
**Comparison and Performance of Various Battery Systems**

Cell Type Mod. No . Manufacturer	Temp: 25°C			System Voltage (Nominal): 28V				
	Silver Zinc MC1(2.5) Yardney	Silver Zinc HR3DC-6 Yardney	Silver Zinc HR5DC-9 Yardney	Ni-ca AF GE	Ni-cad "C" GE	Ni-cad "1/2D" GE	Ni-cad "D" GE	Ni-cad "F" GE
<b>Electrical Characteristics Rated Capacity (AH):</b>								
1 Hr. Rate	2.5	3	5	.750	1.8	2.2	4.0	6.2
Open Ckt. Voltage:								
Cell (volts)	1.86	1.86	1.86	1.3	1.3	1.3	1.3	1.3
System (volts)	37.2	37.2	37.2	31.2	31.2	31.2	31.2	31.2
<b>VL (Average Plateau at C/1 Discharge):</b>								
Cell (volts)	1.43	1.47	1.45	1.2	1.2	1.2	1.2	1.2
System (volts)	28.6	28.6	29.4	29	28.8	28.8	28.8	28.8
Operating Time to 27V Sys. Minm. (Min) at C/1 Discharge Rate	52	84	93	60	60	60	50	65
<b>Shelf Life:</b>								
Dry	5 yrs	5 yrs	5 yrs	N/A	N/A	N/A	N/A	N/A
Activated	30days	6mo	6mo	>10yrs	>10yrs	>10yrs	>10yrs	>10yrs
Cycles of Operation	3->5	10->20	10->20	>500	>500	>500	>500	>500
<b>Physical Characteristics:</b>								
Weight:								
Cell (ounces)	1.1	3.2	4.6	1.2	2.3	3.2	5.2	7.8
System (pounds)	1.375	4	5.75	1.8	3.45	4.8	7.8	11.7
Dimensions (inches):								
Height	2.02	2.86	2.91	1.98	1.86	1.45	2.34	3.48
Width	1.08	1.72	2.08					
Depth	0.54	0.59	0.79					
Diameter	—	—	—	0.7	1.06	1.33	1.33	1.33
Volume (inches <sup>3</sup> ):								
Cell	1.18	2.9	4.78	0.76	1.64	2.0	3.25	4.83
System	23.6	58	95.6	18.28	39.4	48	78	116
<b>Quantity Required for Nominal 28V System:</b>								
	20	20	20	24	24	24	24	

**Table H-2: Comparison and Performance of NiCad Battery Systems**

Temp = 25C      System Voltage Nominal = 28V							
Cell Type	2/3 AF	A	C	Cs	D	F	M
Manufacturer	Sanyo	Panasonic	Gates	GE	GE	Sanyo	Sanyo
<b>Electrical Characteristics</b>							
Rated Capacity (AH)	0.475	1.4	2.4	1.2	4.5	7	10
Open Circuit Voltage (Volts)							
Cell	1.35	1.35	1.35	1.35	1.35	1.35	1.35
24 Cell Pack	32.4	32.4	32.4	32.4	32.4	32.4	32.4
Average Plateau Voltage at C/1:							
Cell (Volts)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
24 Cell Pack (Volts)	28.8	28.8	28.8	28.8	28.8	28.8	28.8
Operating time to 27V Min (min)	5.5	5.5	5.5	5.5	5.5	5.5	5.5
<b>Physical Characteristics of a Cell:</b>							
Weight (oz)	0.65	1.2	2.3	1.7	2.7	6.8	14.1
Diameter (in)	0.67	0.67	1.01	0.88	1.28	1.28	1.66
Height (in)	1.11	1.94	1.88	1.67	2.3	3.5	3.5
<b>Physical Characteristics of a Pack:</b>							
Weight (lbs)	1.59	2.46	5.94	N/A	11	16.73	28.34
Length (in)	4.45	4.45	7.18	6.4	8.79	8.79	11.25
Height (in)	1.74	2.6	2.53	2.38	3.12	4.28	7.53
Width (in)	2.99	2.99	4.82	4.29	5.89	5.89	3.83

## Appendix I: GSFC/WFF Safety Data Requirements

REFERENCE: The GSFC/WFF safety data requirements in this Appendix are extracted from *Range Safety Manual for Goddard Space Flight Center (GSFC)/Wallops Flight Facility (WFF) RSM 2002*. The Principal Investigator is responsible for providing the data outlined in this Appendix. Vehicle Description Data is provided by WFF.

### PAYLOAD DESCRIPTION DATA

#### 1. Hazardous Materials

**Pyrotechnic Details** - Principal Investigators will provide the GSFC/WFF Mission Manager with six readily distinguishable copies of schematics and wiring diagrams of all pyrotechnic circuits and all other circuits physically or electrically related to pyrotechnics.

For each squib, the minimum sure-fire current, maximum no-fire current, recommended firing current, nominal resistance, and, if available, the RF characteristics must be shown. Provide a description of the power source, including output, battery life, and details on battery charging. Scale drawings must be supplied for any payloads having RF transmitters or beacons, showing the location of all pyrotechnic devices in relation to all transmitting antennas. The frequency, range, type of emission, type of radiating antenna, and radiated power (both peak and average) shall be shown for each transmitter or beacon. Schematics, drawings, operation descriptions of pyrotechnic check out and monitoring equipment, and any other auxiliary equipment will be supplied. The Range will be notified of changes as it is the responsibility of Principal Investigators to certify that all drawings are up-to-date.

**Chemicals** - The Principal Investigator will provide a description of all chemical systems, including toxicity and necessary precautions to be taken.

**Pressure Vessels** - The Principal Investigator will provide a description of any pressure vessels used in the payload, their technical characteristics, and details on design and test pressure.

2. **Radioactive Materials**

For all materials planned for use at the GSFC/WFF, which will involve exposure or possible exposure of personnel, application will be made by the GSFC/WFF to the Nuclear Regulatory Commission for a license granting the GSFC/WFF the authority to:

- a. Handle, store, ship, and control sources in use at the GSFC/WFF.
- b. Establish operational procedures and provide monitoring, dosimetry, and the required records.
- c. Establish necessary emergency procedures in the event of malfunctions, explosions, or destruct actions.
- d. Dispose of waste materials.

Permission may be granted by the GSFC/WFF for licensed Principal Investigators to possess and control small calibration or other small sources provided:

- a. An operational procedure is submitted for storage, handling, shipment, etc.
- b. Records are maintained for all radiation sources, etc.
- c. Principal Investigators are responsible for the source as stated in the license

The following technical information on radioactive materials must be submitted:

- a. Types and numbers of radioactive materials with their current curie content.
- b. Size, shape, and general characteristics of the radioactive sources
- c. Mission of each source
- d. Radiation level versus distance from material.
- e. Container description
- f. Shipping and storage container and label description
- g. Shipping date and method of shipment
- h. Two copies of Nuclear Regulatory Commission's license details
- i. Principal Investigator's personnel monitoring devices and methods of use (portable survey instruments, personnel dosimeters, film badges, procedures, etc.).
- j. Location of radioactive source on research vehicle
- k. Principal Investigator's representatives who shall have responsibility at the Range

- l. A record of exposure of each individual who will be exposed at the range prior to operations at GSFC/WFF. This should include total exposure, last exposure date, etc.
- m. A detailed breakdown of estimated time of source exposure during all build-up, test, and launch operations
- n. Procedure for handling and use of external sources during all times exposed
- o. All calibration procedures involving the use of exposed radioactive sources

## **Appendix J: Sounding Rocket Launch Ranges**

### **J.1 U.S. Army White Sands Missile Range**

#### **General**

The White Sands Missile Range (WSMR) is the Department of Defense's largest overland National range. It is located in southern New Mexico (32.5° N 106.5° W) approximately 35 miles northeast of Las Cruces, New Mexico, and about 70 miles north northwest of El Paso, Texas. The climate is semi-arid with usually unlimited visibility, warm to hot temperatures, and low humidity. Occasionally snows occur in the area during the winter months thereby disrupting traffic and launch operations.

WSMR contains major test facilities, laboratories, launch and impact areas, extensive instrumentation and test equipment, and a very large ADP facility. There are several tenant activities at WSMR. The U. S. Naval Ordnance Missile Test Station sponsors the NASA sounding rocket launch activities. Figure J.1-1 is a photo of WSMR.

#### **Mission Manager**

The Mission Manager will initially coordinate the requirements with the WSMR sponsor. As activities progress, direct contact usually ensues with those technical counterparts involved, e.g., telemetry, ionosonde, and meteorology. The Mission Manager is the interface for launch operations.

#### **Data Requirements**

The range can provide extensive real time, quick-look and flight data. It is important to state detailed data requirements in sufficient time to be included in the Flight Requirements Plan which must arrive at the range at least 30 days prior to launch. See Section 2 for details on the preparation and processing of Flight Requirements Plan.

#### **Data Request Forms**

PI's using PCM telemetry and requiring computer-compatible data tapes, must complete the required "PCM Data Request" form, available from the Mission Manager to assure prompt processing of the data onto tapes.

#### **Mass Properties**

The determination of mass properties is usually performed prior to the horizontal test.

### **Payload Disassembly**

Disassembly should be kept to a minimum following horizontal testing. If extensive disassembly is required, it may be wise to schedule a second horizontal test.

### **Operational Safety**

Safety during launch operations at the pad is the responsibility of the WSMR Pad Supervisor. The launch pad is a very hazardous area and there are strict operational procedures for safety. The project team must adhere to the range safety procedures.

### **Industrial Safety**

All project personnel are expected to comply with prudent industrial safety procedures. When appropriate, wear safety glasses, hard hats, reasonable clothing (steel toed shoes during activity where payloads/motors could cause grief if accidentally dropped), and special protective gear/devices when handling hazardous materials, e.g., liquid nitrogen, radioactive sources, and shaped charges. If not properly attired or qualified, leave the area.



**Figure J.1-1. White Sands Missile Range**

### **Road Blocks**

Frequently, road blocks are necessary on Highway 70 which runs through the range. Plan your arrival at the range around scheduled road blocks.

### **Traffic Regulations**

Traffic regulations are strictly enforced. Use your seat belts. At White Sands a ticket is a Federal offense.

### **Visit Requests**

Visit requests for all personnel working (temporarily) or visiting the WSMR is required in advance. The PI's sponsoring organization is responsible for furnishing visitor information to the WSMR Security Office with an information copy to the U. S. Naval Ordnance Missile Test Station. If your payload requires radioactive sources for in-flight or preflight calibration, a pre-arrival written clearance must be obtained.

### **Foreign Nationals**

Clearance for visits by foreign nationals to WSMR are initiated through the Mission Manager. Subsection 11.3 outlines the information required for approval of foreign national visits to WSMR. The Mission Manager should have this information at least 60 days prior to the scheduled visit. Foreign nationals are generally not permitted up-range. If their presence is required, check with the range for necessary clearances well ahead of time.

### **Photography**

Photographs are prohibited in all areas except the rocket display located near the main entrance. The range can provide technical photos, e.g., your rocket, early stages of flight, recovered hardware. See your Mission Manager for details.

### **Test and Evaluation**

A testing facility has been installed in Building N200. It is frequently used for test and evaluation of SPARCS related payloads. However, it is well suited for test and evaluation of other payloads. It has the capabilities for:

- Dynamic Balance
- Moment of Inertia and Center of Gravity Measurements
- Vibration Testing
- Magnetic Calibration
- Optical Alignment

There is a vacuum system, an optical bench, a photographic darkroom, a sun tracker and a Hydrogen - alpha telescope. The entire area, while not maintained to clean room standards, is maintained at positive pressure. Section 6 describes the facilities in more detail.



**Shipping**

The PI is responsible for shipping the experiment and associated support equipment to WSMR. This includes all costs. Air freight is the usual mode.

**WSMR Contacts**

Below are listed some of the more important points of contact at WSMR:

Research Rocket Officer (NOMTS) (505) 678-5502/1714


Head of the SPARCS Group  
Located at LC-35, Building N239 (505) 679-9716/9709

PSL Telemetry Group  
Located at LC-36 (505) 678-3998

## J.2 Poker Flat Research Range

### Introduction

The Poker Flat Research Range (PFRR) is located in the center of Alaska near Fairbanks, approximately 1-1/2° below the Arctic circle at 65.2°N 147.5°W. The range is managed under contract by the Geophysical Institute, University of Alaska, Fairbanks, Alaska. Figure J.2-1 shows an aerial view of PFRR.

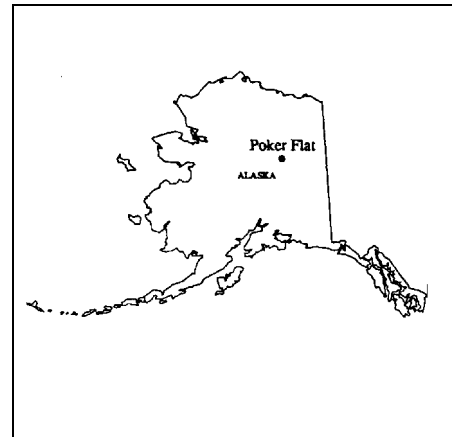

There are numerous range users; however, the major users are Department of Defense and NASA - both university and NASA Center sponsored. Questions regarding PFRR range capabilities, arrangements for use, procedures, travel, and accommodations should be addressed to the Mission Manager. Poker Flat has published a range users manual providing extensive information regarding the range.



**Figure J.2-1 Aerial View of PFRR**

### Capabilities

The major attributes of the range are:

- On United States real estate; high latitude site
- Land impact to 400 miles Ocean impact to 2800 miles

- S-band telemetry with trajectory option
- C-band transponder radar track
- Economical payload recovery
- Six major launch pads
- 22,000 pound launch capability
- 6,000 pound payload capability

### **Facilities**

PFRR is situated at the 30 Mile Post on the Steese Highway, about 20 miles northeast of Fairbanks. The complex, occupying about 7,000 acres, includes:

- Launch site, blockhouse, pads, communications, fire control, safety, and wind-weighting
- Payload and vehicle storage and assembly areas
- Clean room - 600 sq ft - Class 100
- An on range science site with geophysical monitoring and optical measurements
- Radar facilities
- Telemetry site
- Administrative and miscellaneous support facilities
- Down range science sites

### **Coordination**

The operations at PFRR are cooperative ventures invariably involving several organizations. For example, WFF is responsible for managing, supporting, and operating a radar system, telemetry system, timing system and related equipment at PFRR while the University of Alaska employees manage and control launch operations. Therefore, it is important that all parties involved in a mission be fully informed on a timely basis on any action which could affect technical arrangements, operations, or scheduling.

### **Travel & Accommodations**

Travel to Fairbanks is primarily by commercial air. Personnel using the range usually lodge in Fairbanks. Rental cars are available for travel to and from the range. Range users and visitors should coordinate their arrival in the Fairbanks area by contacting the Range Supervisor's office at (907) 474-7015 during work hours.

### **Shipping and Mail**

Payloads are normally shipped to PFRR through Fairbanks via air freight. The Principal Investigator (PI) is responsible for arrangements and costs for experiment related equipment PFRR addresses are:

Freight Shipment: Poker Flat Research Range  
30 Mile Steese Highway  
Fairbanks, Alaska 99712

US Mail: Poker Flat Research Range  
Geophysical Institute  
Fairbanks, Alaska 99775-0800

### **Cold Weather**

Most of the launch operations occur in mid-winter. Heated facilities are available to keep payloads warm up until launch. However conditions can be extreme and some special protective features may have to be designed into your payload. The Mission Manager can advise on any special requirements.

### **Environmental Clothing**

PFRR does not provide environmental clothing to visitors. It will be necessary to have special clothing in mid-winter. The PI is responsible for providing appropriate cold weather clothing.

### **Driving Safety**

The Steese Highway between Fairbanks and PFRR is infrequently traveled at night. Temperatures of -50°F and 50 knot winds produce a life threatening wind chill. Exposed skin can freeze in a matter of seconds. Take warm clothing. A breakdown at night in the wrong place can be fatal.

### **Photography**

Photography is permitted anywhere on the range.

### **PFRR Contact**

The primary point of contact at PFRR is:

Director, Poker Flat Research Rang  
Geophysical Institute  
University of Alaska  
Fairbanks, Alaska 99775-7320

Commercial phone: (907) 474-7015  
Fax: 907-474-5705

### J.3 Andøya Rocket Range, Norway

#### General

Andøya Rocket Range is located in northern Norway. The range cooperates with European Space Agency (ESA) program and supports orbital satellite operations, sounding rocket and balloon operations.

#### Location

ANDØYA Rocket Range is located at geographic coordinates:  
69°17' N 16°01' E



#### Trajectories and Impact Areas

The range offers a variety of possible trajectories and covers a large area both in latitude and longitude. This, together with the extensive system of ground observations, provides a great flexibility in selecting launch conditions and types of phenomena to be studied.

The impact areas in the Norwegian Sea set almost no practical limits to impact dispersion for rockets. Rockets have been launched to an apogee of approximately 800 kilometers, with impact of third stage at 900 kilometers.

#### Telemetry

Permanently installed telemetry systems operate in the P-band (216-260 MHz) and the S-band (2200-2300 MHz). Both systems are based on IRIG standards. All standard types of modulation used with sounding rocket telemetry can be handled

#### WFF Telemetry Radar Support

WFF can provide mobile telemetry and radar system support at Andøya to enhance the permanently installed capabilities or provide separate, unique capabilities. Section 2 and 9 discuss procedures for obtaining support to augment permanently installed capabilities. The requirements are coordinated through the Mission Manager.

### **Launch Pads and Launchers**

There are eight launch pads in the launch area. The range has two universal launchers, two zero-length launchers, and one small rail launcher (overslung type). Pads are available for launchers provided by users. Figure J.3-1 is a photograph of the launch area.



**Figure J.3-1: Launch Facilities at Andøya Rocket Range, Norway**

### **Optical Site**

An optical site, located 100 meters northeast of the control center, contains a laboratory and a room for recordings. The building also has an observation room with glass ceiling and walls, giving excellent conditions for overall watching of the aurora.

### **Tromsø Telemetry Site**

The Tromsø telemetry station is located in northern Norway. The site primarily supports data acquisition. S- and L-band telemetry receiving and recording facilities are available. The station acts as a telemetry back-up facility for the Andøya Rocket Range during rocket launch campaigns. The Tromsø telemetry station's geographic coordinates are: 69°39' N, 18°56' E.

### **Other Sites**

Other RF and optical data acquisition and launch support sites may be of assistance to individual experiments. Contact the Mission Manager for additional information.

## Points Of Contact

Royal Norwegian Council for Scientific and Industrial Research (NTNF) Space Activity Division:

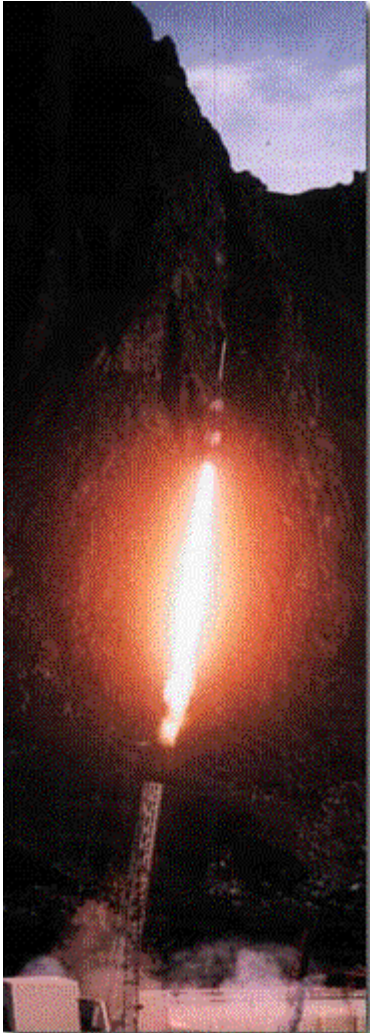


Figure J.3-2: Launch at Andøya

Gaustadelleen 30 D,  
P.O. Box 309 - Bindern  
OSLO 3, Norway

Telephone: 47-2-143590  
Cable "Satellite"  
Tel ex 0056-18174 space n  
Telefax: (System 3M-9140) 47-2-143590 ext  
.123

Andøya Rocket Range:

Andøya Rocket Range  
P.O. Box 54  
N-8480 ANDENES, Norway

Telephone: 47-76-141644  
Facsimile: 47-76-141857

Tromsø Telemetry Station:

NTNF, Tromsø Telemetry Station  
P.O. Box 387  
N-9001 TROMSØ, Norway

## J.4 Esrange, Sweden

### General

Esrange is a space research range situated in northern Sweden above the Arctic Circle near Kiruna, Sweden. Esrange is located in the auroral zone, which makes it perfect for auroral studies and other high latitude phenomena. The base supports orbital satellites, sounding rocket, and balloon operations. The base is managed by the Swedish Space Corporation, which is a state-owned limited corporation under the Ministry of Industry.

The geographic coordinates for Kiruna are 68° 0' N 21° E. A co-operative agreement exists between Esrange and the Norwegian sounding rocket range at Andøya, Norway.



### Instrumentation

Esrange has modern instrumentation facilities to support the various rocket and balloon research activities. Special emphasis has been given to data display and quick look equipment to facilitate easy and quick data evaluation during countdown and flight. Timing and a variety of communications are available. Esrange has modern scientific equipment such as an ionospheric sounder, riometers, magnetometers, photometers, auroral TV systems, VLF receivers and sky cameras. Provisions are made for the PI's to install their own special equipment.



Figure J.4-1: Esrange Sweden Launch Area

### Other Support

Esrange is located close to the town of Kiruna, Sweden, with shops, hotels, and restaurants. There are daily jet flights to and from Stockholm.



### **Telemetry**

Capabilities can be provided for IRIG standard FM/FM systems and PCM to a maximum bit rate of 1 Mbit/s. Two independent auto-tracking systems, and several wide band magnetic recorders, receivers, and antennas are available. Frequency bands are 134-150 MHz, 230-260 MHz and 400-402 MHz. Receiving equipment for S-band (1.65-2.4 GHz) is also available.

### **WFF Telemetry & Radar Support**

WFF can design, build, and install telemetry and radar system support at Esrange to enhance the permanently installed capabilities or provide separate, unique capabilities. Section 2 and 9 discuss procedures for obtaining support to augment permanently installed capabilities. The requirements are coordinated through the Mission Manager.

### **Command/Destruct**

Command and destruct capabilities are available to a range of 500 Km.

### **Trajectory Determination**

C-band radar, tone ranging system, interferometers and telemetry tracking is available with real-time display.

### **Payload Preparation**

There are two large rocket preparation halls (about 300 m<sup>2</sup> each) equipped with gantry cranes. The payload preparation area is divided into several laboratories. Clean room facilities are available.

### **Launchers**

Six permanent launchers and support facilities including environmental controls and blockhouse make the launching of most types of sounding rockets possible. The range is equipped with launchers for many different rocket types, and ground instrumentation permits two simultaneous launchings, or launchings of several rockets in rapid succession. Examples of rocket launch capabilities are: Terrier and Taurus combinations, Black Brant, Skua, Petrel, and Skylark.

### **Observation Sites**

Down range observations can be made from two different sites within the impact area north of the launch site. An extensive network of ground based scientific instrumentation has been established in northern Scandinavia. The Mission Manager can provide additional information on facilities available, planning, support requirements, and communications arrangements.

### **Payload Recovery**

Recovery of payloads is a common requirement. About 50 percent of the rockets are equipped with recovery systems. Recovery missions are invariably successful. This is due to a number of factors: the open land impact areas, the fair climate, the tracking aids such as radar, auto-tracking TM antennas, interferometers, homing systems, and the excellent helicopter support from pilots well acquainted with this uninhabited region of Sweden. Use of the S-19 Boost Guidance System is required for some vehicles. This system is discussed in Subsection 3.3.

### **Transportation**

Virtually all transportation and travel is by air.

### **Points of Contact**

**Swedish Space Corporation:** Swedish Space Corporation  
Tritonvagen 27  
S-17154 Solna  
Sweden  
  
Tel:08/980200  
Telex: 17128 Spaceco S

**ESRANGE:** Swedish Space Corporation  
Esrangle  
P. O. Box 802  
S-981 28 Kiruna  
Sweden  
  
Tel: 46-980-72000  
Facsimile: 46-980-12890

### **Cargo Address**

All formalities regarding customs and shipment within Sweden will be taken care of by the Swedish Space Corporation. Shipments to Esrangle should be addressed:

SWEDISH SPACE CORPORATION  
ESRANGE  
KIRUNA  
SWEDEN

A pro forma invoice should be attached to the shipment stating contents and the price of the equipment enclosed. An extra copy of the invoice should be sent in advance to Esrangle.

## Appendix K: Wallops Flight Facility Digital Telemetry System (PDP11/60): Dites Tape Format

The Dites tape format has now been replaced with the PTP (Programmable Telemetry Processor) CD-ROM format described below.

### PTP CD-ROM Data Format

This document describes the CD-ROM data format generated by the “AVTEC SYSTEMS” Programmable Telemetry Processor for Windows NT (PTP NT).

The source of data will be telemetry data obtained from NSROC Sounding Rocket Missions. This Data Format is referred to as “PTP NT” format.

### PTP PCM FORMAT

<i>MUX</i> (8 bytes)	<b>Data Field</b>  (depends on Frame Length and Word Size)
-------------------------	--

Format Option #1: File Recorder Format with Record MUX Header enabled.

<i>MUX</i> (8 bytes)	<b>PB-4</b> (6 bytes)	<b>Data Field</b>  (depends on Frame Length and Word Size)
-------------------------	--------------------------	--

Format Option #2: File Recorder Format with Record Time Stamp enabled.  
 (MUX header is automatically inserted).

<i>MUX</i> (8 bytes)	Appended Status (48 bytes)	<b>Data Field</b>  (depends on Frame Length and Word Size)
-------------------------	-------------------------------	--

Format Option #3: File Recorder Format with Record Status enabled.  
 (MUX header is automatically inserted).

<i>MUX</i> (8 bytes)	<b>PB-4</b> (6 bytes)	Appended Status (48 bytes)	<b>Data Field</b>  (depends on Frame Length and Word Size)
-------------------------	--------------------------	-------------------------------	--

Format Option #4: File Recorder Format with Record Time Stamp and Record Status enabled. (MUX header is automatically inserted).  
 It is intended to only provide format option #2.

## PTP MUX Header Format

Item	Field Name	Format & Size	Value
1	Header Synchronization	Unsigned integer (4 bytes)	30030330 hex
2	Source Module	Unsigned integer (1 byte)	Equal to the source module number minus 1. For example, if Module 3 sends a buffer to the file recorder, the Source Module field is equal to 2.
3	Header Types	Unsigned integer (1 byte)	Defines the other header types that follow the MUX Header.  0 = No additional headers 1 = PB-4 Time Code 2 = Serial Input Appended Status 3 = Both PB-4 and Appended Status
4	Next Header Offset	Unsigned integer (2 bytes)	Offset to the next MUX header in the file relative to the end of the current MUX header. Note that this is a Little Endian representation, the least significant byte precedes the most significant byte in the file. For example for 8 bit words and a PCM frame length of 128, the Next Header Offset appears in the file as 80 00 hex. (A 6 byte time stamp is normally after the header)
	Total Length	8 bytes	

## NASA PB-4 Time Code Format

Item	Field Name	Format & Size	Value
1	Days of Year	Unsigned integer (11 bits)	Range 1 to 365
2	Milliseconds of Day	Unsigned integer (27 bits)	Range = 0 to 86399999
3	Microseconds of a Millisecond	Unsigned integer (10 bits)	Range = 0 to 999
	Total Length	6 bytes	

Note : “Days of Year” field uses only the least significant 9 bits of the 11 bit field.

## PTP Data Field Format

Data field contains entire PCM minor frame including Frame synchronization pattern and any frame counters. PCM word sizes greater than 8 bits will be right justified in 2-byte words. The most significant byte will precede the least significant byte. If word lengths of 9 to 15 bits are used, the user will have to mask out the uppermost bits in the first word. (They will not be zeros.) The most significant bit (MSB) precedes the least significant bit (LSB) for each byte. The number of bytes per field is equal to the number of PCM words per minor frame if PCM word length is 8 bits. For PCM word lengths greater than 8 bits, the number of bytes per field is equal to 2 times the number of PCM words per minor frame.

## Appendix L: Radar Data Format

### 1.1.2155

PROGRAM NAME                   - POSDAT  
 FILE CODE                     - 4  
 MODE OF WRITING             - FORMATTED  
 DISPOSITION                 - OUTPUT

Information is recorded in an ASCII character set at 800, 1600 or 6250 BPI. Each logical record is composed of 312 eight bit ASCII characters. One logical record is included in each physical record. The following is a definition of the parameters associated with each character position within the logical record.

<u>CHARACTERS</u>	<u>PARAMETERS</u>
1- 2	Year (1984 = 84)
3- 5	Day of Year (Jan 15 = 015)
6- 7	Epoch or launch time hours
8- 9	Epoch or launch time minutes
10- 11	Epoch or launch time seconds
12	Epoch or launch time tenths of seconds
13- 24	Elapsed time (seconds)
25- 36	Slant range from the tracker (meters)
37- 48	Azimuth from the tracker (degrees)
49- 60	Elevation from the tracker (degrees)
61- 72	Horizontal range from the launcher (meters)
73- 84	North-South range from the launcher (meters)
85- 96	East-West range from the launcher (meters)
97-108	Azimuth of vehicle from the launcher (degrees)
109-120	Altitude of vehicle (meters)
121-132	Latitude of sub-vehicle point (degrees)
133-144	Longitude of sub-vehicle point (degrees)
145-156	Earth relative velocity (meters/second)
157-168	East-West component of velocity (meters/second)
169-180	North-South component of velocity (meters/second)
181-192	Altitude component of velocity (meters/second)
193-204	Flight elevation angle (degrees)
205-216	Flight azimuth angle (degrees)
217-228	Slant range from look angle station (meters)
229-240	Azimuth from look angle station (degrees)
241-252	Elevation from look angle station (degrees)
253-312	Spare

**CHANGE HISTORY LOG**

<b>Revision</b>	<b>Effective Date</b>	<b>Description of Changes</b>
<u>Baseline</u>	<u>July 2001</u>	<u>Initial Release</u>
Revision 1	May 2003	<ol style="list-style-type: none"> <li>1. Cover changed to reflect new Directorate Title</li> <li>2. Verification Footer Added</li> <li>3. Document Control # Added</li> <li>4. RSM93 changed to RSM-2002 (Range Safety Manual)</li> <li>5. NHB 1700 changed to NPG 8715.3 (NASA Safety Manual)</li> <li>6. Air Operations Manual changed to 830-AOM-0001 Aircraft Operations Manual (AOM)</li> <li>7. Dialing access changed from 8 to 9</li> <li>8. Breakfast hours changed from 0800 to 0900</li> <li>9. Reference to Lithium Batteries removed</li> <li>10. Reference to WFF Instrumentation Handbook removed.</li> <li>11. Change History Log added.</li> </ol>
Revision 2	June 2005	<ol style="list-style-type: none"> <li>1. Cover changed to Kwaj Campaign</li> <li>2. Merged Chapters 5 &amp; 6</li> <li>3. Appendix A Added; New Form</li> <li>4. Appendix I Deleted; Text Incorporated in Chapter 5</li> <li>5. Appendix O Deleted; No Longer Used.</li> <li>6. All Other Chapters Were Revised; Figures &amp; Tables Renumbered, &amp; TOC Updated to Reflect all Changes.</li> </ol>
