


NOTE: When Government drawings, specifications, or other data are used for any purposes other than in connection with a contract with the Government, the United States Government thereby incurs no responsibility, or any obligation whatsoever, and it is to be understood that the drawings and specifications are for identification only and are not to be reproduced by any means, in any form, or by any name, without the prior written permission of the person or organization to whom they are addressed.

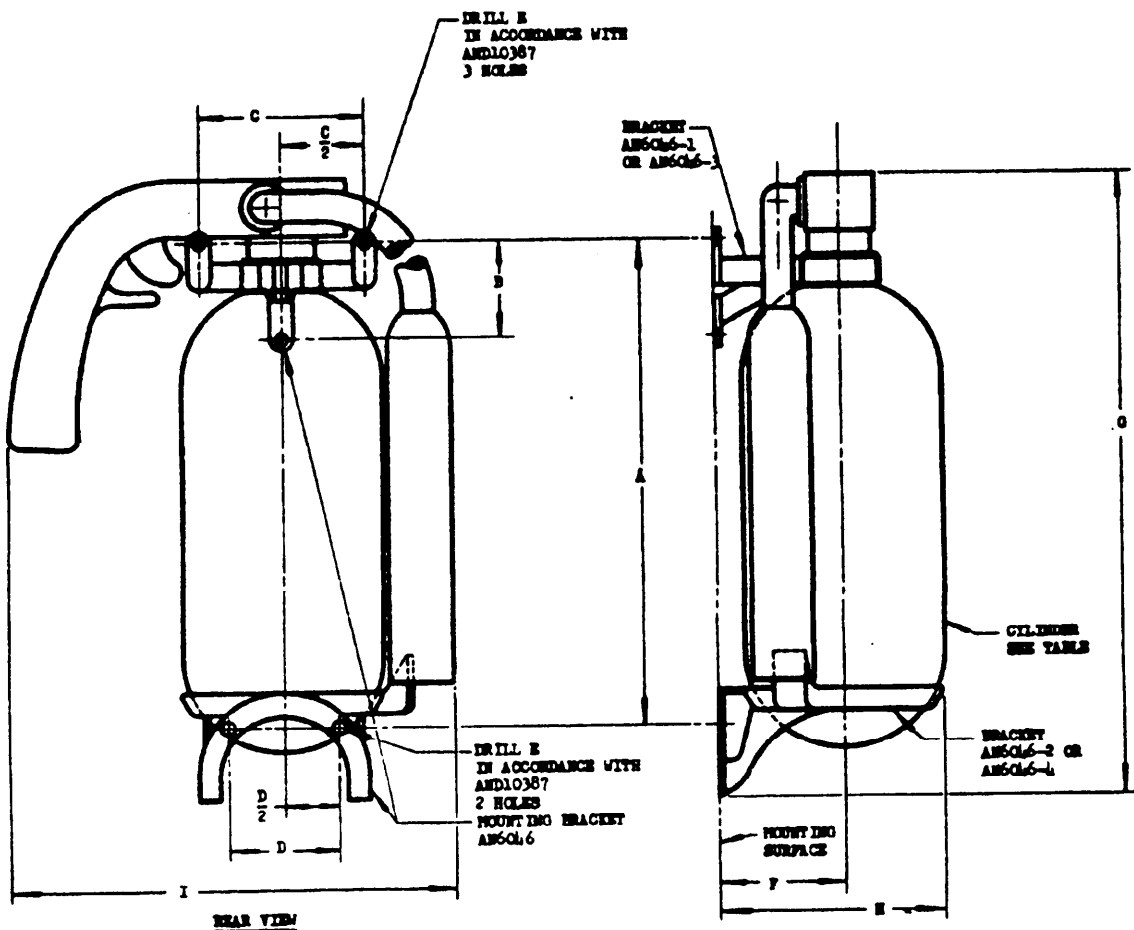

REAR VIEW

AN ASSEMBLY PART NO.	CO ₂ CAPACITY LB	A	B	C	D	E	F	G MAX	H MAX	I MAX	WEIGHT MAX LB FULLY CHARGED CO ₂ CAPACITY
AN6045-57	1.03	9- 3/16	1-3/4	3	2	13/64	2-1/16	13-5/8	4	9-5/8	6.3
AN6045-96	1.73	13- 7/32	1-3/4	3	2	13/64	2-1/16	17-3/4	4	9-5/8	8.8
AN6045-147	2.65	18- 3/4	1-3/4	3	2	13/64	2-1/16	23-1/4	4	9-5/8	12.1
AN6045-205	3.70	13-13/32	2	4	3-1/4	13/64	3-3/8	18-3/8	6-1/8	12-1/8	14.8

NUMBER FOLLOWING DASH IN PART NUMBER INDICATES CAPACITY IN CUBIC INCHES.
 EXAMPLE OF PART NO.: AN6045-57 = EXTINGUISHER: FIRE, CARBON DIOXIDE, PORTABLE, 57 CUBIC INCH CAPACITY.
 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

NOTE: This drawing was approved by Joint Chiefs of Staff, Air Force and Navy Departments in the Air Force Library and the Navy Library. This drawing represents all standard dimensions for the parts and sub-assemblies shown. It is intended for the procurement of standard parts, or for the use in new design, not for the construction of other than the items shown.

PROCUREMENT SPECIFICATION MIL-B-5627	AIR FORCE-NAVY AERONAUTICAL STANDARD EXTINGUISHER ASSEMBLY — FIRE, CARBON DIOXIDE, PORTABLE	AN6045
---	---	---------------

APPROVED 24 FEB 50 REVISED